


LRMSM-T

Color management
MacAdam 3 step  

- New application lighting that fits into a corner
- Expands the range of design with two-sided luminescence
- Available in 60 sizes from 33mm to 1508mm with shorter delivery time

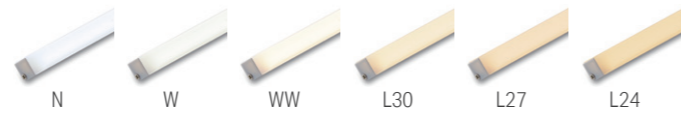


Model No. (Open end)
LRMSM-T - - **DF** - **I** - **6**

Model No. (Connector)
LRMSM-T - - **DF** - **I** - **6** **(C)**

Product Name	Length / Lead wire	Light source color	Cover Type	Wattage	Connector
LRMSM	Refer to Custom order length W: Both ends S: One end	N : Natural white W : White WW : Warm white 3500K L30 : Warm white 3000K L27 : Warm white 2700K L24 : Warm white 2400K	DF : Diffuser Environment I : Indoor	6 : 6.4W/m	(C) : Connector

Light Intensity Refer to P.12
LRMSM-T1008□-L27-DF-I-6

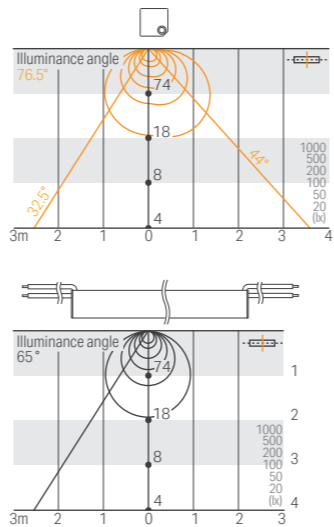

Specification

Model No.	Open end	LRMSM-T1000 S/W-□-DF-I-6
	Connector	LRMSM-T1000 S/W-□-DF-I-6 (C)
Power consumption	6.4 W/m	
Fitting length(L)	33 to 1508mm (Refer to Custom order length)	
Weight	70g / 1008 mm	
Luminaire efficacy(2700K)	69.5 lm/W	
Light source color	Delivered CCT	○ = Device inventory
N 5000K Ra 92	4600K	○ 510lm
W 4000K Ra 92	3700K	○ 523lm
WW 3500K Ra 92	3300K	○ 480lm
L30 3000K Ra 91	2900K	○ 449lm
L27 2700K Ra 91	2600K	○ 446lm
L24 2400K Ra 92	2400K	○ 418lm

Specification may be subject to change without announcement.
The optical data provided on the each product pages are for reference only; the data values are not guaranteed. Please use as reference materials for your planning.

General Specification

Input voltage	DC24V
Environment	Indoors (no condensation)
Max. length Per circuit	3.5m
Material (body)	Polycarbonate, Aluminum
Attachments	-
Option parts	① Mounting clip for RIMiT us ③ Lift Parts for RIMiT ④ Magnet set A ⑤ Cable 5M TR Connector ⑥ Magnetic tape ⑦ Double-sided tape
Certification	CE
Dimmable	Yes (0-10V/1-10V, DMX, DALI, PWM)

Max. connectable length per power supply

Length of LED fixture (70% loading factor) *: split into multiple circuits	Power supply
6.4 W/m	
~5.4 m*	50W power supply
~10.9 m*	100W power supply
~16.4 m*	150W power supply

Luci RIMiT sm -Custom order-

Model No.


LRMSM - T - - **DF** - **I** - **6** **(C)**

Product name	Length	Lead Wire	Light source color	Cover type	Environment	Wattage	Connector
Refer to "Custom order products size"		W Both ends lead wire S One end lead wire	N Natural white 5300K W White 4200K WW Warm white 3500K 3500K L30 Warm white 3000K 3000K L27 Warm white 2700K 2700K L24 Warm white 2400K 2400K	DF Diffuser	I Indoor	6 6.4W	(C) Connector

External dimension


Luci RIMiT sm Indoor / W Both ends lead wire, Open end

LRMSM - T **W** - - **DF** - **I** - **6**

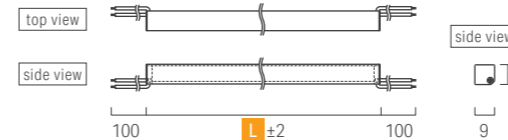


Luci RIMiT sm Indoor / S Both ends lead wire, Open end

LRMSM - T **S** - - **DF** - **I** - **6**

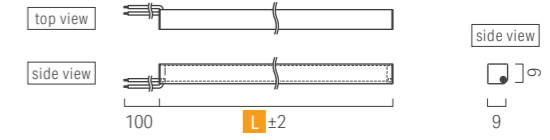


Luci RIMiT sm Indoor / W Both ends lead wire, (C) Connector

LRMSM - T **W** - - **DF** - **I** - **6** **(C)**

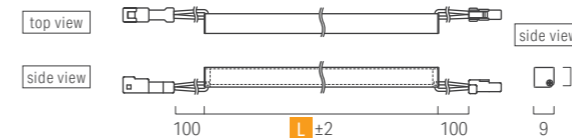

Luci RIMiT sm Indoor / S Both ends lead wire, (C) Connector

LRMSM - T **S** - - **DF** - **I** - **6** **(C)**

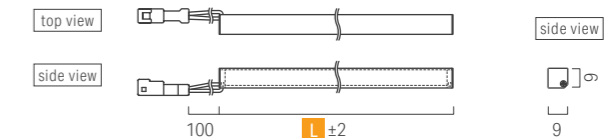

Custom order products size

Length	Fitting length	Power consumption	Mounting Clip	
Length	L	(W)		
0033	32.2	0.2	1 pcs	
0058	57.2	0.3		
0083	82.2	0.5	2 pcs Recommended pitch 60 to 230mm	
0108	107.2	0.6		
0133	132.2	0.8		
0158	157.2	1.0		
0183	182.2	1.1		
0208	207.2	1.3		
0233	232.2	1.4		
0258	257.2	1.6		
0283	282.2	1.8		3 pcs Recommended pitch 140 to 370mm
0308	307.2	1.9		
0333	332.2	2.1		
0358	357.2	2.2		
0383	382.2	2.4		
0408	407.2	2.6		
0433	432.2	2.7		
0458	457.2	2.9		
0483	482.2	3.0		
0508	507.2	3.2		
0533	532.2	3.4	4 pcs Recommended pitch 250 to 400mm	
0558	557.2	3.5		
0583	582.2	3.7		
0608	607.2	3.8		
0633	632.2	4.0		
0658	657.2	4.2		
0683	682.2	4.3		
0708	707.2	4.5		
0733	732.2	4.6		
0758	757.2	4.8		

Length	Fitting length	Power consumption	Mounting Clip
Length	L	(W)	
0783	782.2	5.0	5 pcs Recommended pitch 315 to 375mm
0808	807.2	5.1	
0833	832.2	5.3	
0858	857.2	5.4	
0883	882.2	5.6	
0908	907.2	5.8	
0933	932.2	5.9	
0958	957.2	6.1	
0983	982.2	6.2	
1008	1007.2	6.4	
1033	1032.2	6.6	5 pcs Recommended pitch 315 to 375mm
1058	1057.2	6.7	
1083	1082.2	6.9	
1108	1107.2	7.0	
1133	1132.2	7.2	
1158	1157.2	7.4	
1183	1182.2	7.5	
1208	1207.2	7.7	
1233	1232.2	7.8	
1258	1257.2	8.0	
1283	1282.2	8.2	5 pcs Recommended pitch 315 to 375mm
1308	1307.2	8.3	
1333	1332.2	8.5	
1358	1357.2	8.6	
1383	1382.2	8.8	
1408	1407.2	9.0	
1433	1432.2	9.1	
1458	1457.2	9.3	
1483	1482.2	9.4	
1508	1507.2	9.6	