

RIMiT flex series


Luci RIMiT flex alpha

Luci RIMiT flex alpha (Both ends lead wire, Indoor)




Luci Pte., Ltd.

30. Sep. 2026

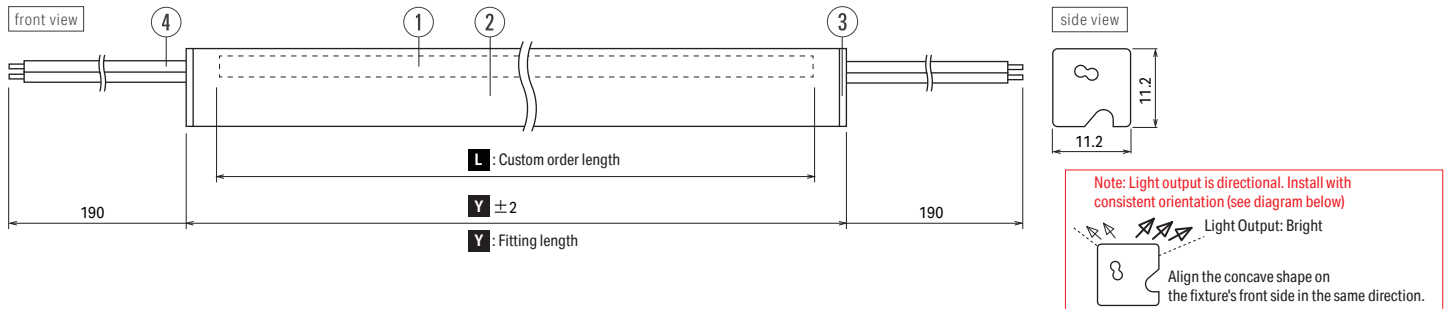


Installation dimensions (Side view)

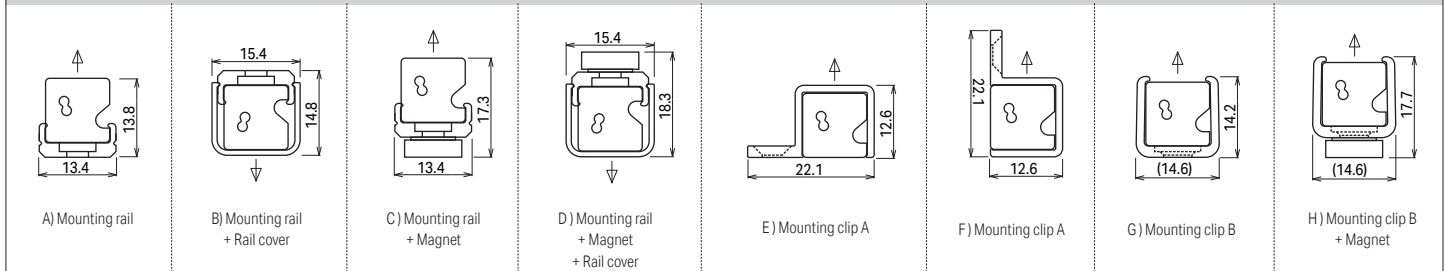


Accessories


Magnet set R for rail (MG-R) 4set/box

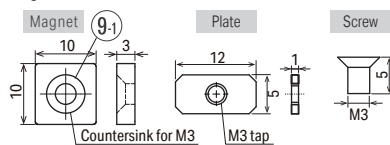


Magnet set A for rail (MG-A) 5set/box

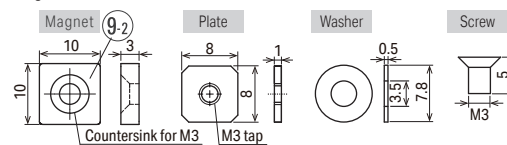



Mounting clip A for RIMiT flex alpha (LRFA-PT-A) 5pcs/1bag




Mounting clip B for RIMiT flex alpha (LRFA-PT-B) 5pcs/1bag



Outercap B for RIMiT flex alpha (LRFA-PT-C) 1pc/1bag

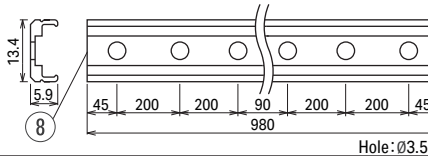Mounting rail 1000 for RIMiT flex (LRF-RL1000)
Aluminum Mounting rail 1000 for RIMiT flex (LRF-RL1000-AL)
Please use the aluminum mounting rail 1000, LRF-RL1000-AL, for the installation of RIMiT flex 15W

Rail cover for RIMiT flex alpha (LRFA-C1000)

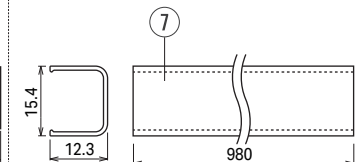

Unit Of Measure: mm The specifications and prices are subject to change without prior notice.

Part Name	Material	Note	Drawing
1 Body		Flexible circuit board	
2 Tube	Silicone	Diffuser / White	
3 Cap	Silicone	Diffuser	
4 Lead wire	Copper, Vinyl	UL1007 AWG22, Black:+24V Gray:2ch White:1ch	
5 Mounting clip A	Polycarbonate	Clear	
6 Mounting clip B	Polycarbonate	Clear	
7 Rail cover	Polycarbonate	Clear	
8 Mounting rail	Polycarbonate / Aluminum	White / Alumite treatment, White painting	
9 Magnet set	Neogium, Stainless steel, Steel	Magnet, Washer, Plate, Screw	
10			

Specifications	Light Source Color	Model Number
Input voltage: DC24V	Natural White N 4600K Ra 93 639 lm	LRFA -T Length W - Light source color - I - Wattage
Wattage: 9.7W/m, 15.3W/m	White W 3600K Ra 92 636 lm	Custom order length
Max. length per circuit: 4m	Warm white WW 3200K Ra 92 617 lm	N : 5000K
Weight: 67g (@L1000)	Warm white L30 2800K Ra 91 591 lm	W : 4000K
Environment: Indoor (No Condensation)	Warm white L27 2500K Ra 91 572 lm	WW : 3500K
Accessories: Mounting clip	Warm white L24 2300K Ra 91 517 lm	L30 : 3000K
Mounting rail		L27 : 2700K
Aluminum mounting rail		L24 : 2400K
Rail cover, Magnet set		

Job / Project Name	Area / Location / Circuit No.
Product Code	Length (mm)
Qty.	
Luci Pte. Ltd.	http://www.luci.co.jp E-mail: info@luci.co.jp
Singapore Regional HQ	Tel: +65-6291-2410
Hong Kong Marketing Office	Tel: +852-2219-8462

RIMiT flex series



Luci RIMiT flex alpha

Luci RIMiT flex alpha (One end lead wire, Indoor)



Luci Pte., Ltd.


30. Sep. 2026

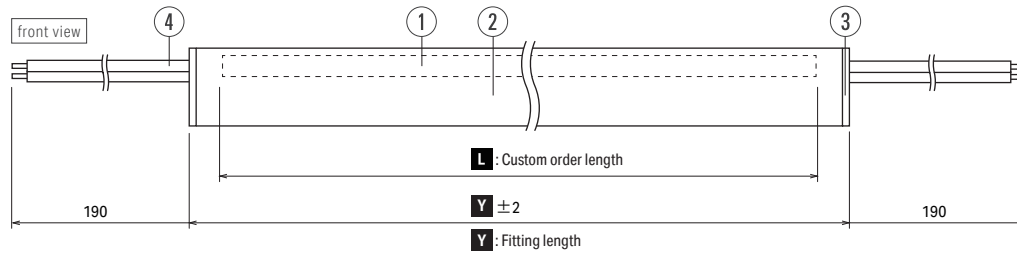

Note: Light output is directional. Install with consistent orientation (see diagram below)




Installation dimensions (Side view)

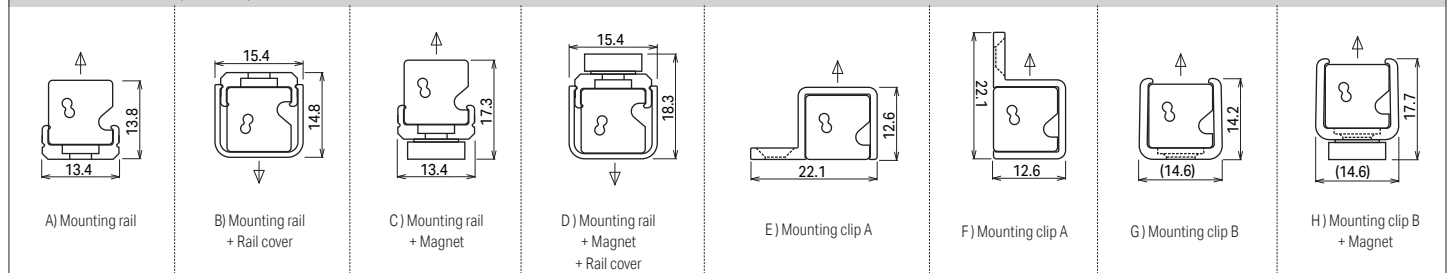


Accessories


Magnet set R for rail (MG-R) 4set/box

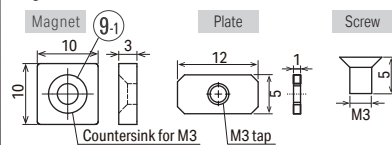


Magnet set A for rail (MG-A) 5set/box

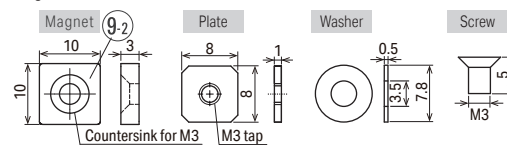


Mounting clip A for RIMiT flex alpha (LRFA-PT-A) 5pcs/1bag




Mounting clip B for RIMiT flex alpha (LRFA-PT-B) 5pcs/1bag




Outercap B for RIMiT flex alpha (LRFA-PT-C) 1pc/1bag



Mounting rail 1000 for RIMiT flex (LRF-RL1000) Aluminum Mounting rail 1000 for RIMiT flex (LRF-RL1000-AL) Please use the aluminum mounting rail 1000, LRF-RL1000-AL, for the installation of RIMiT flex 15W

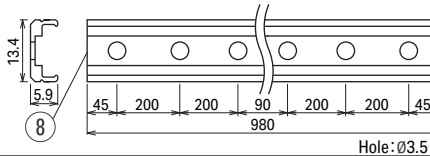

Rail cover for RIMiT flex alpha (LRFA-C1000)

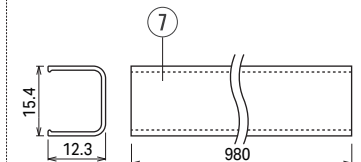

Unit Of Measure: mm The specifications and prices are subject to change without prior notice.

Part Name	Material	Note	Drawing
1 Body		Flexible circuit board	
2 Tube	Silicone	Diffuser / White	
3 Cap	Silicone	Diffuser	
4 Lead wire	Copper, Vinyl	UL1007 AWG22, Black:+24V Gray:2ch White:1ch	
5 Mounting clip A	Polycarbonate	Clear	
6 Mounting clip B	Polycarbonate	Clear	
7 Rail cover	Polycarbonate	Clear	
8 Mounting rail	Polycarbonate / Aluminum	White / Alumite treatment, White painting	
9 Magnet set	Neogium, Stainless steel, Steel	Magnet, Washer, Plate, Screw	
10			

Specifications	Light Source Color	Delivered CCT	9.7W/m	15.3W/m	Model Number
Input voltage: DC24V	Natural White N	4600K	Ra 93	639 lm	964 lm
Wattage: 9.7W/m, 15.3W/m	White W	3600K	Ra 92	636 lm	954 lm
Max. length per circuit: 4m	Warm white WW	3200K	Ra 92	617 lm	912 lm
Weight: 67g (@L1000)	Warm white L30	2800K	Ra 91	591 lm	875 lm
Environment: Indoor (No Condensation)	Warm white L27	2500K	Ra 91	572 lm	830 lm
Accessories: Mounting clip	Warm white L24	2300K	Ra 91	517 lm	779 lm
Mounting rail					
Aluminum mounting rail					
Rail cover, Magnet set					

Job / Project Name	Area / Location / Circuit No.
Product Code	Length (mm)
Qty.	
Luci Pte. Ltd.	http://www.luci.co.jp E-mail: info@luci.co.jp
Singapore Regional HQ	Tel: +65-6291-2410
Hong Kong Marketing Office	Tel: +852-2219-8462

RIMiT flex series


Luci RIMiT flex alpha

Luci RIMiT flex alpha (Both ends lead wire, Connector, Indoor)




Luci Pte., Ltd.

30. Sep. 2026

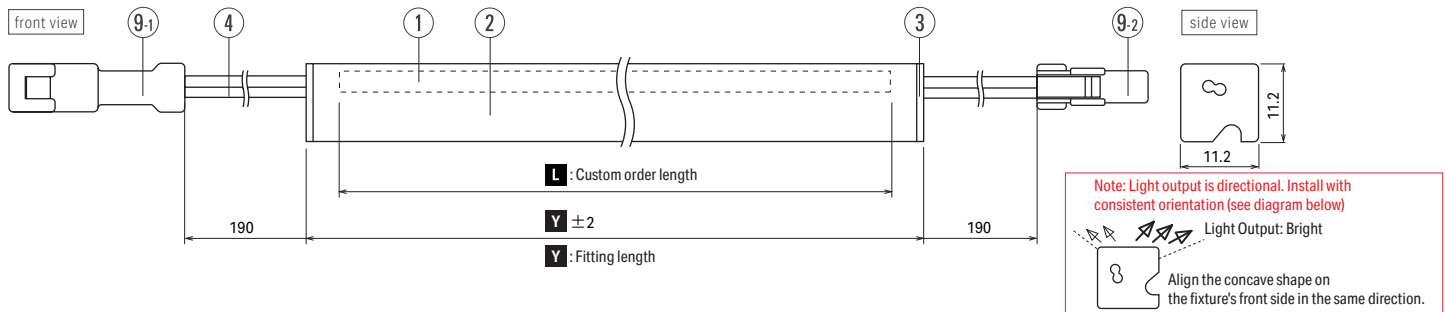


Installation dimensions (Side view)

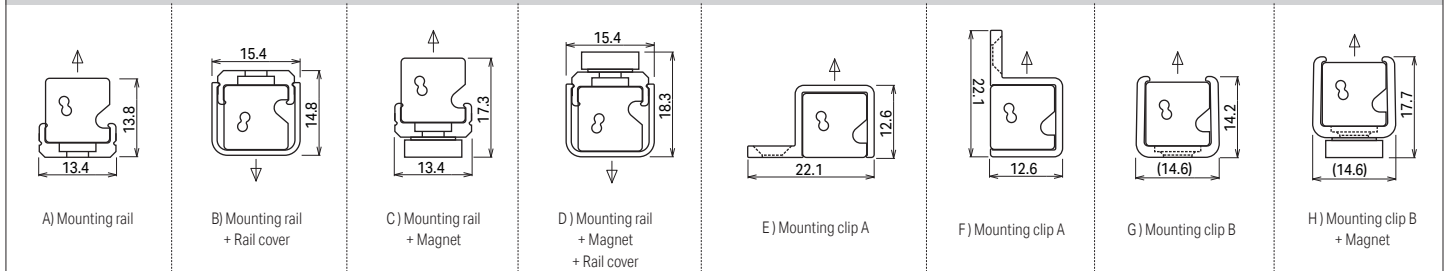


Accessories


Magnet set R for rail (MG-R) 4set/box

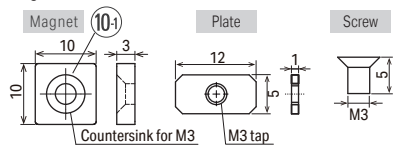


Magnet set A for rail (MG-A) 5set/box

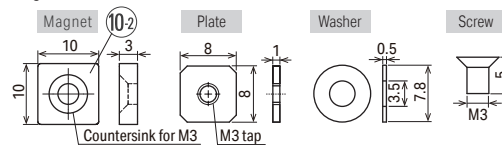


Cable 5M TR Connector (CAD-5000-MEFE-0)

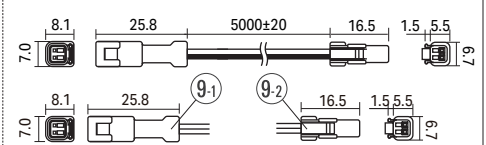


Mounting clip A for RIMiT flex alpha (LRA-PT-A) 5pcs/1bag




Mounting clip B for RIMiT flex alpha (LRA-PT-B) 5pcs/1bag




Outercap B for RIMiT flex alpha (LRA-PT-C) 1pc/1bag



Mounting rail 1000 for RIMiT flex (LRF-RL1000) Aluminum Mounting rail 1000 for RIMiT flex (LRF-RL1000-AL) Please use the aluminum mounting rail 1000, LRF-RL1000-AL, for the installation of RIMiT flex 15W

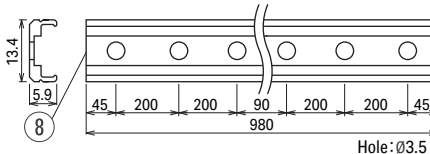

Rail cover for RIMiT flex alpha (LRA-C1000)

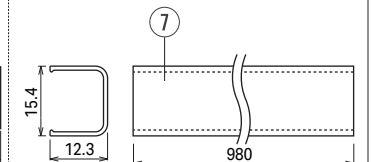

Unit Of Measure: mm The specifications and prices are subject to change without prior notice.

	Part Name	Material	Note	Drawing
1	Body		Flexible circuit board	
2	Tube	Silicone	Diffuser / White	
3	Cap	Silicone	Diffuser	
4	Lead wire	Copper, Vinyl	UL1007 AWG22, Black:+24V Gray:2ch White:1ch	
5	Mounting clip A	Polycarbonate	Clear	
6	Mounting clip B	Polycarbonate	Clear	
7	Rail cover	Polycarbonate	Clear	
8	Mounting rail	Polycarbonate / Aluminum	White / Alumite treatment, White painting	
9	Connector	Nylon	UL94V-0, White	
10	Magnet set	Neogium, Stainless steel, Steel	Magnet, Washer, Plate, Screw	

Specifications	Light Source Color	Delivered CCT	9.7W/m	15.3W/m	Model Number
Input voltage: DC24V	Natural White N	4600K	Ra 93	639 lm	964 lm
Wattage: 9.7W/m, 15.3W/m	White W	3600K	Ra 92	636 lm	954 lm
Max. length per circuit: 4m	Warm white WW	3200K	Ra 92	617 lm	912 lm
Weight: 67g (@L1000)	Warm white L30	2800K	Ra 91	591 lm	875 lm
Environment: Indoor (No Condensation)	Warm white L27	2500K	Ra 91	572 lm	830 lm
Accessories: Mounting clip	Warm white L24	2300K	Ra 91	517 lm	779 lm
Mounting rail					
Aluminum mounting rail					
Rail cover, Magnet set					

Custom order length	W - Light source color	I - Wattage (C)
	N : 5000K	9 : 9.7 W/m
	W : 4000K	15 : 15.3 W/m
	WW : 3500K	
	L30 : 3000K	
	L27 : 2700K	
	L24 : 2400K	

Job / Project Name

Area / Location / Circuit No.

Product Code

Qty.

Length (mm)

Luci Pte. Ltd.

<http://www.luci.co.jp>
E-mail: info@luci.co.jpSingapore Regional HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462




RIMiT flex series

Luci RIMiT flex alpha

Luci RIMiT flex alpha (One end lead wire, Connector, Indoor)

Luci Pte., Ltd.

30. Sep. 2026

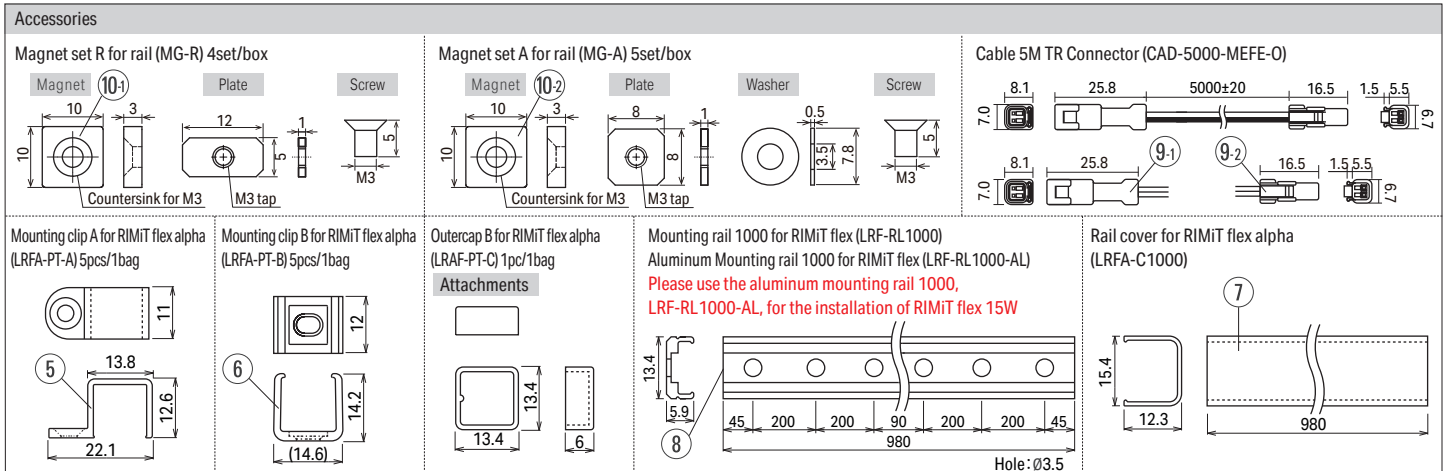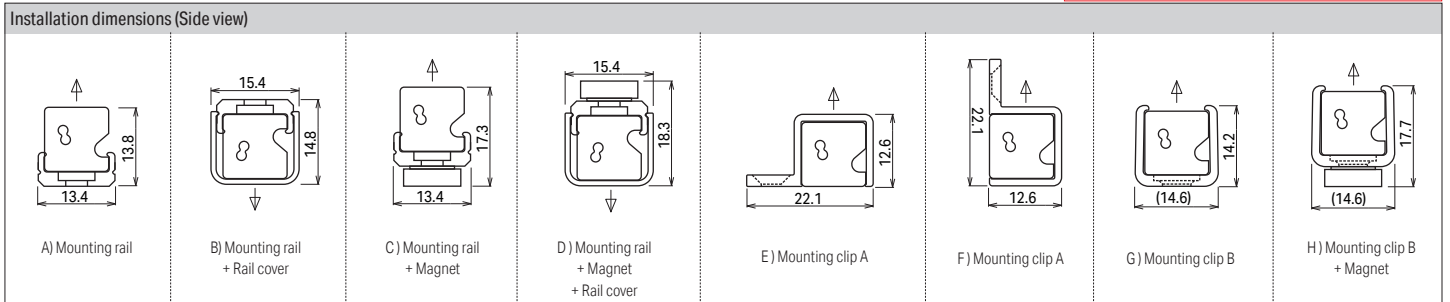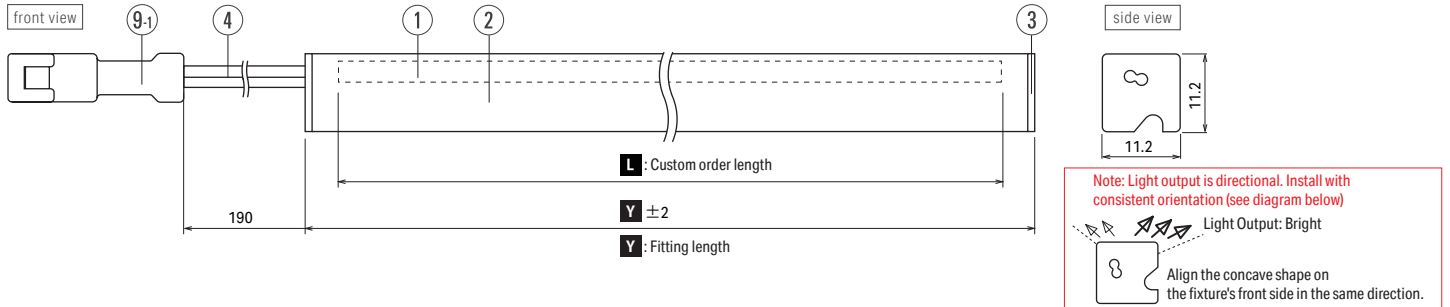

Unit Of Measure: mm The specifications and prices are subject to change without prior notice.

Part Name	Material	Note	Drawing
1 Body		Flexible circuit board	
2 Tube	Silicone	Diffuser / White	
3 Cap	Silicone	Diffuser	
4 Lead wire	Copper, Vinyl	UL1007 AWG22, Black:+24V Gray:2ch White:1ch	
5 Mounting clip A	Polycarbonate	Clear	
6 Mounting clip B	Polycarbonate	Clear	
7 Rail cover	Polycarbonate	Clear	
8 Mounting rail	Polycarbonate / Aluminum	White / Alumite treatment, White painting	
9 Connector	Nylon	UL94V-0, White	
10 Magnet set	Neogium, Stainless steel, Steel	Magnet, Washer, Plate, Screw	

Specifications	Light Source Color	Delivered CCT	9.7W/m	15.3W/m	Model Number
Input voltage: DC24V	Natural White N	4600K	Ra 93	639 lm	964 lm
Wattage: 9.7W/m, 15.3W/m	White W	3600K	Ra 92	636 lm	954 lm
Max. length per circuit: 4m	Warm white WW	3200K	Ra 92	617 lm	912 lm
Weight: 67g (@L1000)	Warm white L30	2800K	Ra 91	591 lm	875 lm
Environment: Indoor (No Condensation)	Warm white L27	2500K	Ra 91	572 lm	830 lm
Accessories: Mounting clip	Warm white L24	2300K	Ra 91	517 lm	779 lm
Mounting rail					
Aluminum mounting rail					
Rail cover, Magnet set					

Custom order length	Light source color	Wattage (C)
N	5000K	9 : 9.7 W/m
W	4000K	15 : 15.3 W/m
WW	3500K	
L30	3000K	
L27	2700K	
L24	2400K	

Job / Project Name	Area / Location / Circuit No.
Product Code	Length (mm)
Qty.	

Luci Pte. Ltd.

<http://www.luci.co.jp>
E-mail: info@luci.co.jp

Singapore Regional HQ
Tel: +65-6291-2410

Hong Kong Marketing Office
Tel: +852-2219-8462



Luci Pte. Ltd.

<http://www.luci.co.jp>
E-mail: info@luci.co.jp

Singapore Regional HQ
Tel: +65-6291-2410

Hong Kong Marketing Office
Tel: +852-2219-8462

Luci RIMiT flex alpha Indoor

LRFA - T Length W/S - Light source color - DF - I - Wattage

Specifications by length

Length	Fitting length (mm)	Wattage(W)	
		9.7	15.3
0025	37	0.2	0.4
0050	62	0.5	0.8
0075	87	0.7	1.1
0100	112	1.0	1.5
0125	137	1.2	1.9
0150	162	1.5	2.3
0175	187	1.7	2.7
0200	212	1.9	3.1
0225	237	2.2	3.4
0250	262	2.4	3.8
0275	287	2.7	4.2
0300	312	2.9	4.6
0325	337	3.1	5.0
0350	362	3.4	5.4
0375	387	3.6	5.7
0400	412	3.9	6.1
0425	437	4.1	6.5
0450	462	4.4	6.9
0475	487	4.6	7.3
0500	512	4.8	7.7
0525	537	5.1	8.0
0550	562	5.3	8.4
0575	587	5.6	8.8
0600	612	5.8	9.2
0625	637	6.1	9.6
0650	662	6.3	10.0
0675	687	6.5	10.3
0700	712	6.8	10.7
0725	737	7.0	11.1
0750	762	7.3	11.5
0775	787	7.5	11.9
0800	812	7.7	12.3
0825	837	8.0	12.6
0850	862	8.2	13.0
0875	887	8.5	13.4
0900	912	8.7	13.8
0925	937	9.0	14.2
0950	962	9.2	14.6
0975	987	9.4	14.9
1000	1012	9.7	15.3
1025	1038	9.9	15.7
1050	1063	10.2	16.1
1075	1088	10.4	16.5
1100	1113	10.6	16.9
1125	1138	10.9	17.2
1150	1163	11.1	17.6
1175	1188	11.4	18.0
1200	1213	11.6	18.4
1225	1238	11.9	18.8
1250	1263	12.1	19.2
1275	1288	12.3	19.5
1300	1313	12.6	19.9
1325	1338	12.8	20.3
1350	1363	13.1	20.7

Length	Fitting length (mm)	Wattage(W)	
		9.7	15.3
1375	1388	13.3	21.1
1400	1413	13.6	21.4
1425	1438	13.8	21.8
1450	1463	14.0	22.2
1475	1488	14.3	22.6
1500	1513	14.5	23.0
1525	1538	14.8	23.4
1550	1563	15.0	23.7
1575	1588	15.2	24.1
1600	1613	15.5	24.5
1625	1638	15.7	24.9
1650	1663	16.0	25.3
1675	1688	16.2	25.7
1700	1713	16.5	26.0
1725	1738	16.7	26.4
1750	1763	16.9	26.8
1775	1788	17.2	27.2
1800	1813	17.4	27.6
1825	1838	17.7	28.0
1850	1863	17.9	28.3
1875	1888	18.2	28.7
1900	1913	18.4	29.1
1925	1938	18.6	29.5
1950	1963	18.9	29.9
1975	1988	19.1	30.3
2000	2013	19.4	30.6
2025	2039	19.6	31.0
2050	2064	19.8	31.4
2075	2089	20.1	31.8
2100	2114	20.3	32.2
2125	2139	20.6	32.6
2150	2164	20.8	32.9
2175	2189	21.1	33.3
2200	2214	21.3	33.7
2225	2239	21.5	34.1
2250	2264	21.8	34.5
2275	2289	22.0	34.9
2300	2314	22.3	35.2
2325	2339	22.5	35.6
2350	2364	22.7	36.0
2375	2389	23.0	36.4
2400	2414	23.2	36.8
2425	2439	23.5	37.2
2450	2464	23.7	37.5
2475	2489	24.0	37.9
2500	2514	24.2	38.3
2525	2539	24.4	38.7
2550	2564	24.7	39.1
2575	2589	24.9	39.4
2600	2614	25.2	39.8
2625	2639	25.4	40.2
2650	2664	25.7	40.6
2675	2689	25.9	41.0
2700	2714	26.1	41.4

Length	Fitting length (mm)	Wattage(W)	
		9.7	15.3
2725	2739	26.4	41.7
2750	2764	26.6	42.1
2775	2789	26.9	42.5
2800	2814	27.1	42.9
2825	2839	27.3	43.3
2850	2864	27.6	43.7
2875	2889	27.8	44.0
2900	2914	28.1	44.4
2925	2939	28.3	44.8
2950	2964	28.6	45.2
2975	2989	28.8	45.6
3000	3014	29.0	46.0
3025	3040	29.3	46.3
3050	3065	29.5	46.7
3075	3090	29.8	47.1
3100	3115	30.0	47.5
3125	3140	30.3	47.9
3150	3165	30.5	48.3
3175	3190	30.7	48.6
3200	3215	31.0	49.0
3225	3240	31.2	49.4
3250	3265	31.5	49.8
3275	3290	31.7	50.2
3300	3315	31.9	50.6
3325	3340	32.2	50.9
3350	3365	32.4	51.3
3375	3390	32.7	51.7
3400	3415	32.9	52.1
3425	3440	33.2	52.5
3450	3465	33.4	52.9
3475	3490	33.6	53.2
3500	3515	33.9	53.6
3525	3540	34.1	54.0
3550	3565	34.4	54.4
3575	3590	34.6	54.8
3600	3615	34.8	55.2
3625	3640	35.1	55.5
3650	3665	35.3	55.9
3675	3690	35.6	56.3
3700	3715	35.8	56.7
3725	3740	36.1	57.1
3750	3765	36.3	57.5
3775	3790	36.5	57.8
3800	3815	36.8	58.2
3825	3840	37.0	58.6
3850	3865	37.3	59.0
3875	3890	37.5	59.4
3900	3915	37.8	59.7
3925	3940	38.0	60.1
3950	3965	38.2	60.5
3975	3990	38.5	60.9
4000	4015	38.7	61.3