

RIMiT flex series


Luci RIMiT flex alpha

Luci RIMiT flex alpha (Both ends lead wire, IP65)





Luci Pte., Ltd.





30. Sep. 2026

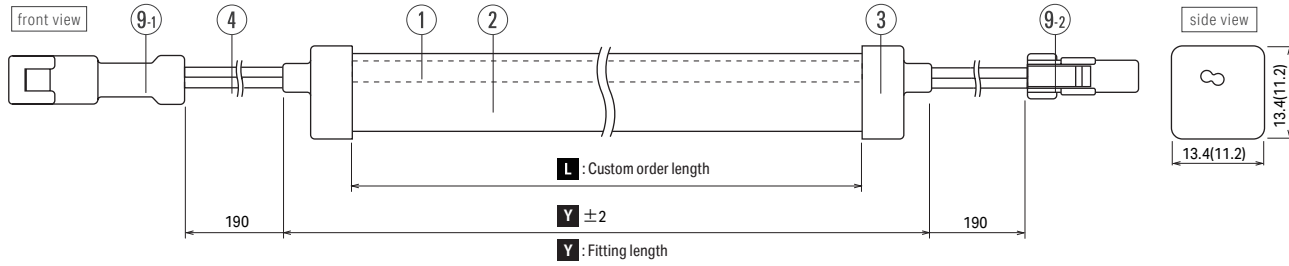

Installation dimensions (Side view)

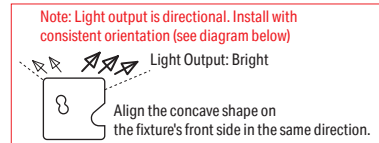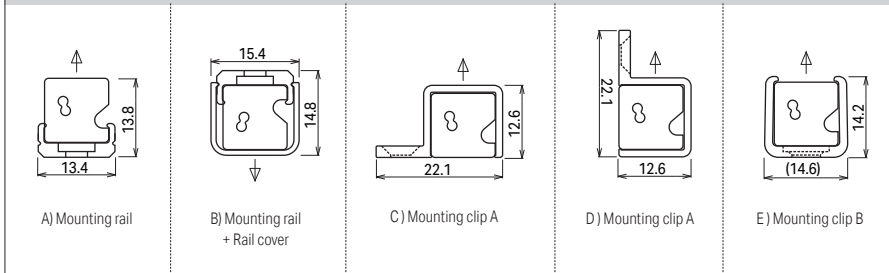

Accessories

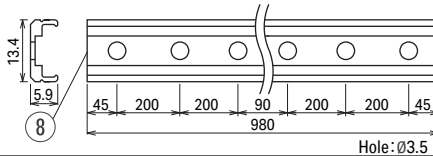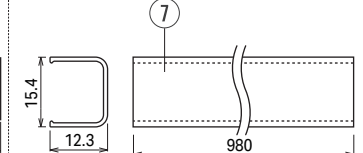Cable 5M TR Connector
(CAD-5000-MEFE-O)Mounting clip A for RIMiT flex alpha
(LRAF-PT-A) 5pcs/1bagMounting clip B for RIMiT flex alpha
(LRFA-PT-B) 5pcs/1bagMounting rail 1000 for RIMiT flex alpha (LRF-RL1000)
Aluminum Mounting rail 1000 for RIMiT flex alpha (LRF-RL1000-AL)
Please use the aluminum mounting rail 1000, LRF-RL1000-AL, for the installation of RIMiT flex 15WRail cover for RIMiT flex alpha
(LRFA-C1000)

Unit Of Measure: mm The specifications and prices are subject to change without prior notice.

Part Name	Material	Note	Drawing
1 Body		Flexible circuit board	
2 Tube	Silicone	Diffuser / White	
3 Cap	Silicone	Diffuser	
4 Lead wire	Copper, Vinyl	UL1007 AWG22, Black:+24V Gray:2ch White:1ch	
5 Mounting clip A	Polycarbonate	Clear	
6 Mounting clip B	Polycarbonate	Clear	
7 Rail cover	Polycarbonate	Clear	
8 Mounting rail	Polycarbonate / Aluminum	White / Alumite treatment, White painting	
9 Connector	Nylon	UL94V-0, White	
10			

Specifications	Light Source Color	Delivered CCT	9.7W/m	15.3W/m	Model Number
Input voltage: DC24V	Natural White N	4600K	Ra 93	639 lm	964 lm
Wattage: 9.7W/m, 15.3W/m	White W	3600K	Ra 92	636 lm	954 lm
Max. length per circuit: 4m	Warm white WW	3200K	Ra 92	617 lm	912 lm
Weight: 67g (@L1000)	Warm white L30	2800K	Ra 91	591 lm	875 lm
Environment: In/Outdoor (No Condensation) IP65	Warm white L27	2500K	Ra 91	572 lm	830 lm
Accessories: Mounting clip	Warm white L24	2300K	Ra 91	517 lm	779 lm
Mounting rail					
Aluminum mounting rail					
Rail cover					

Custom order length	Light source color	Wattage
N	5000K	9 : 9.7 W/m
W	4000K	15 : 15.3 W/m
WW	3500K	
L30	3000K	
L27	2700K	
L24	2400K	

Job / Project Name

Area / Location / Circuit No.

Product Code

Qty.

Length (mm)

Luci Pte. Ltd.

<http://www.luci.co.jp>
E-mail: info@luci.co.jpSingapore Regional HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462

RIMiT flex series


Luci RIMiT flex alpha

Luci RIMiT flex alpha (One end lead wire, IP65)





Luci Pte., Ltd.

30. Sep. 2026

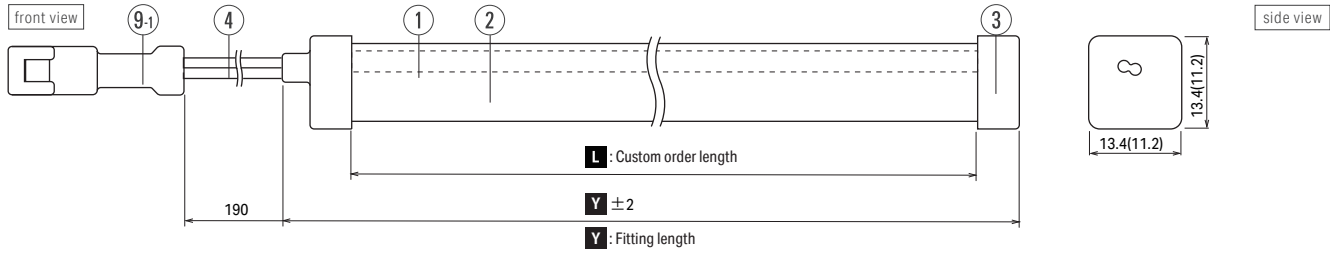

Installation dimensions (Side view)

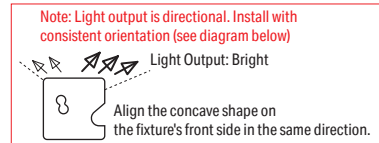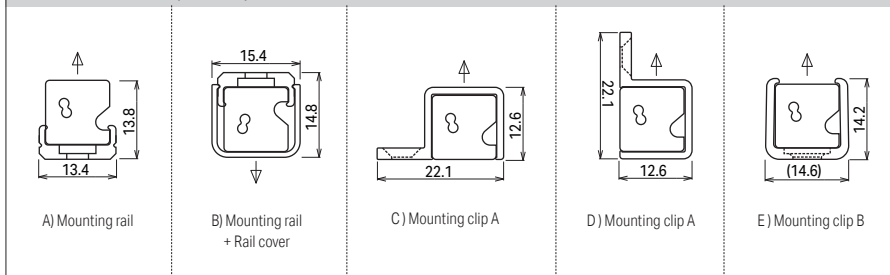


Accessories


Cable 5M TR Connector (CAD-5000-MEFE-O)




Mounting clip A for RIMiT flex alpha (LRAF-PT-A) 5pcs/1bag




Mounting clip B for RIMiT flex alpha (LRFA-PT-B) 5pcs/1bag



Mounting rail 1000 for RIMiT flex alpha (LRF-RL1000) Aluminum Mounting rail 1000 for RIMiT flex alpha (LRF-RL1000-AL) Please use the aluminum mounting rail 1000, LRF-RL1000-AL, for the installation of RIMiT flex 15W

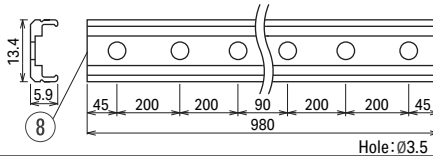

Rail cover for RIMiT flex alpha (LRFA-C1000)

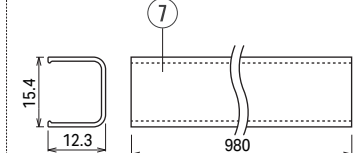

Unit Of Measure: mm The specifications and prices are subject to change without prior notice.

Part Name	Material	Note	Drawing
1 Body		Flexible circuit board	
2 Tube	Silicone	Diffuser / White	
3 Cap	Silicone	Diffuser	
4 Lead wire	Copper, Vinyl	UL1007 AWG22, Black:+24V Gray:2ch White:1ch	
5 Mounting clip A	Polycarbonate	Clear	
6 Mounting clip B	Polycarbonate	Clear	
7 Rail cover	Polycarbonate	Clear	
8 Mounting rail	Polycarbonate / Aluminum	White / Alumite treatment, White painting	
9 Connector	Nylon	UL94V-0, White	
10			

Specifications	Light Source Color	Delivered CCT	9.7W/m	15.3W/m	Model Number
Input voltage: DC24V	Natural White N	4600K	Ra 93	639 lm	964 lm
Wattage: 9.7W/m, 15.3W/m	White W	3600K	Ra 92	636 lm	954 lm
Max. length per circuit: 4m	Warm white WW	3200K	Ra 92	617 lm	912 lm
Weight: 67g (@L1000)	Warm white L30	2800K	Ra 91	591 lm	875 lm
Environment: In/Outdoor (No Condensation) IP65	Warm white L27	2500K	Ra 91	572 lm	830 lm
Accessories: Mounting clip	Warm white L24	2300K	Ra 91	517 lm	779 lm
Mounting rail					
Aluminum mounting rail					
Rail cover					

Custom order length	N - 5000K	9 : 9.7 W/m
	W : 4000K	15 : 15.3 W/m
	WW : 3500K	
	L30 : 3000K	
	L27 : 2700K	
	L24 : 2400K	

Job / Project Name

Area / Location / Circuit No.

Product Code

Qty.

Length (mm)

Luci Pte. Ltd.

<http://www.luci.co.jp>
 E-mail: info@luci.co.jp

 Singapore Regional HQ
 Tel: +65-6291-2410

 Hong Kong Marketing Office
 Tel: +852-2219-8462

Luci RIMiT flex alpha IP65

LRFA - T Length W/S - Light source color - DF - O - Wattage

Specifications by length

Length	Fitting length (mm)		Wattage(W)		Length	Fitting length (mm)		Wattage(W)		Length	Fitting length (mm)		Wattage(W)	
	One end	Both ends	9.7	15.3		One end	Both ends	9.7	15.3		One end	Both ends	9.7	15.3
0025	41	45	0.2	0.4	1375	1392	1396	13.3	21.1	2725	2743	2747	26.4	41.7
0050	66	70	0.5	0.8	1400	1417	1421	13.6	21.4	2750	2768	2772	26.6	42.1
0075	91	95	0.7	1.1	1425	1442	1446	13.8	21.8	2775	2793	2797	26.9	42.5
0100	116	120	1.0	1.5	1450	1467	1471	14.0	22.2	2800	2818	2822	27.1	42.9
0125	141	145	1.2	1.9	1475	1492	1496	14.3	22.6	2825	2843	2847	27.3	43.3
0150	166	170	1.5	2.3	1500	1517	1521	14.5	23.0	2850	2868	2872	27.6	43.7
0175	191	195	1.7	2.7	1525	1542	1546	14.8	23.4	2875	2893	2897	27.8	44.0
0200	216	220	1.9	3.1	1550	1567	1571	15.0	23.7	2900	2918	2922	28.1	44.4
0225	241	245	2.2	3.4	1575	1592	1596	15.2	24.1	2925	2943	2947	28.3	44.8
0250	266	270	2.4	3.8	1600	1617	1621	15.5	24.5	2950	2968	2972	28.6	45.2
0275	291	295	2.7	4.2	1625	1642	1646	15.7	24.9	2975	2993	2997	28.8	45.6
0300	316	320	2.9	4.6	1650	1667	1671	16.0	25.3	3000	3018	3022	29.0	46.0
0325	341	345	3.1	5.0	1675	1692	1696	16.2	25.7	3025	3044	3048	29.3	46.3
0350	366	370	3.4	5.4	1700	1717	1721	16.5	26.0	3050	3069	3073	29.5	46.7
0375	391	395	3.6	5.7	1725	1742	1746	16.7	26.4	3075	3094	3098	29.8	47.1
0400	416	420	3.9	6.1	1750	1767	1771	16.9	26.8	3100	3119	3123	30.0	47.5
0425	441	445	4.1	6.5	1775	1792	1796	17.2	27.2	3125	3144	3148	30.3	47.9
0450	466	470	4.4	6.9	1800	1817	1821	17.4	27.6	3150	3169	3173	30.5	48.3
0475	491	495	4.6	7.3	1825	1842	1846	17.7	28.0	3175	3194	3198	30.7	48.6
0500	516	520	4.8	7.7	1850	1867	1871	17.9	28.3	3200	3219	3223	31.0	49.0
0525	541	545	5.1	8.0	1875	1892	1896	18.2	28.7	3225	3244	3248	31.2	49.4
0550	566	570	5.3	8.4	1900	1917	1921	18.4	29.1	3250	3269	3273	31.5	49.8
0575	591	595	5.6	8.8	1925	1942	1946	18.6	29.5	3275	3294	3298	31.7	50.2
0600	616	620	5.8	9.2	1950	1967	1971	18.9	29.9	3300	3319	3323	31.9	50.6
0625	641	645	6.1	9.6	1975	1992	1996	19.1	30.3	3325	3344	3348	32.2	50.9
0650	666	670	6.3	10.0	2000	2017	2021	19.4	30.6	3350	3369	3373	32.4	51.3
0675	691	695	6.5	10.3	2025	2043	2047	19.6	31.0	3375	3394	3398	32.7	51.7
0700	716	720	6.8	10.7	2050	2068	2072	19.8	31.4	3400	3419	3423	32.9	52.1
0725	741	745	7.0	11.1	2075	2093	2097	20.1	31.8	3425	3444	3448	33.2	52.5
0750	766	770	7.3	11.5	2100	2118	2122	20.3	32.2	3450	3469	3473	33.4	52.9
0775	791	795	7.5	11.9	2125	2143	2147	20.6	32.6	3475	3494	3498	33.6	53.2
0800	816	820	7.7	12.3	2150	2168	2172	20.8	32.9	3500	3519	3523	33.9	53.6
0825	841	845	8.0	12.6	2175	2193	2197	21.1	33.3	3525	3544	3548	34.1	54.0
0850	866	870	8.2	13.0	2200	2218	2222	21.3	33.7	3550	3569	3573	34.4	54.4
0875	891	895	8.5	13.4	2225	2243	2247	21.5	34.1	3575	3594	3598	34.6	54.8
0900	916	920	8.7	13.8	2250	2268	2272	21.8	34.5	3600	3619	3623	34.8	55.2
0925	941	945	9.0	14.2	2275	2293	2297	22.0	34.9	3625	3644	3648	35.1	55.5
0950	966	970	9.2	14.6	2300	2318	2322	22.3	35.2	3650	3669	3673	35.3	55.9
0975	991	995	9.4	14.9	2325	2343	2347	22.5	35.6	3675	3694	3698	35.6	56.3
1000	1016	1020	9.7	15.3	2350	2368	2372	22.7	36.0	3700	3719	3723	35.8	56.7
1025	1042	1046	9.9	15.7	2375	2393	2397	23.0	36.4	3725	3744	3748	36.1	57.1
1050	1067	1071	10.2	16.1	2400	2418	2422	23.2	36.8	3750	3769	3773	36.3	57.5
1075	1092	1096	10.4	16.5	2425	2443	2447	23.5	37.2	3775	3794	3798	36.5	57.8
1100	1117	1121	10.6	16.9	2450	2468	2472	23.7	37.5	3800	3819	3823	36.8	58.2
1125	1142	1146	10.9	17.2	2475	2493	2497	24.0	37.9	3825	3844	3848	37.0	58.6
1150	1167	1171	11.1	17.6	2500	2518	2522	24.2	38.3	3850	3869	3873	37.3	59.0
1175	1192	1196	11.4	18.0	2525	2543	2547	24.4	38.7	3875	3894	3898	37.5	59.4
1200	1217	1221	11.6	18.4	2550	2568	2572	24.7	39.1	3900	3919	3923	37.8	59.7
1225	1242	1246	11.9	18.8	2575	2593	2597	24.9	39.4	3925	3944	3948	38.0	60.1
1250	1267	1271	12.1	19.2	2600	2618	2622	25.2	39.8	3950	3969	3973	38.2	60.5
1275	1292	1296	12.3	19.5	2625	2643	2647	25.4	40.2	3975	3994	3998	38.5	60.9
1300	1317	1321	12.6	19.9	2650	2668	2672	25.7	40.6	4000	4019	4023	38.7	61.3
1325	1342	1346	12.8	20.3	2675	2693	2697	25.9	41.0					
1350	1367	1371	13.1	20.7	2700	2718	2722	26.1	41.4					