


Luci RIMiT flex THOF (Both ends lead wire, Indoor)


Luci Pte., Ltd.

2026.02.01


front view

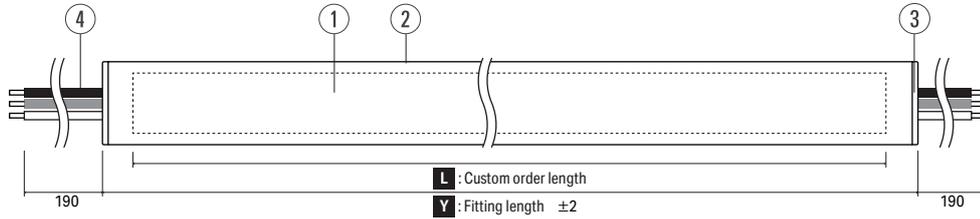

side view




Installation dimensions (Side view)

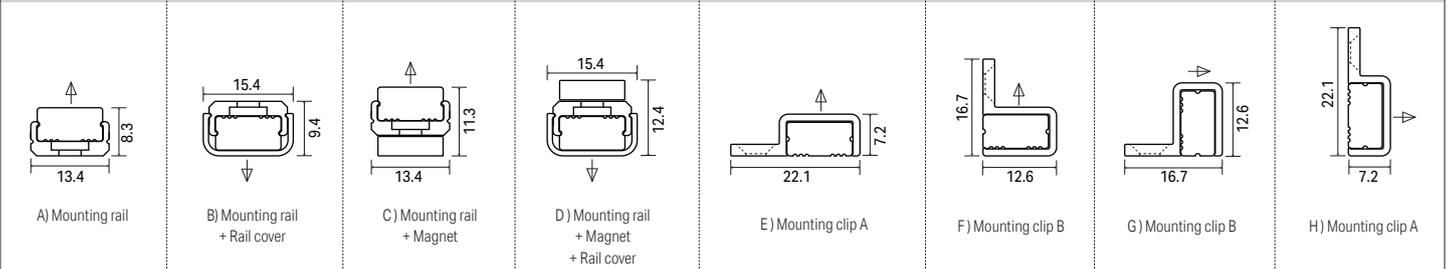


Accessories


Magnet set R for rail (MG-R) 4set/box

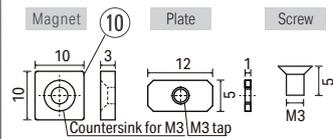


Mounting clip A for RIMiT flex (LRF-PT-A) 5pcs/1bag




Mounting clip B for RIMiT flex (LRF-PT-B) 5pcs/1bag




Outercap B for RIMiT flex (LRF-PT-C) 1pc/1bag Attachments



Mounting rail 1000 for RIMiT flex (LRF-RL1000) Aluminum Mounting rail 1000 for RIMiT flex (LRF-RL1000-AL)

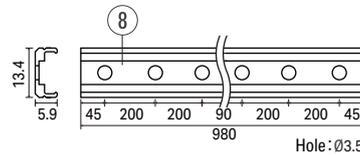

Rail cover for RIMiT flex (LRF-C1000)

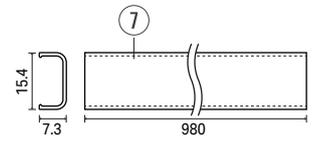

Unit Of Measure: mm The specifications and prices are subject to change without prior notice.

Part Name	Material	Note	Drawing
1 Body		Flexible circuit board	
2 Tube	Silicone	Diffuser / White	
3 Cap	Silicone	Diffuser	
4 Lead wire	Copper, Vinyl	UL1007 AWG22, Black:+24V Gray:2ch White:1ch	
5 Mounting clip A	Polycarbonate	Clear	
6 Mounting clip B	Polycarbonate	Clear	
7 Rail cover	Polycarbonate	Clear	
8 Mounting rail	Polycarbonate / Aluminum	White / Alumite treatment, White painting	
9 -	-	-	
10 Magnet set	Neogium, Stainless steel, Steel	Magnet, Washer, Plate, Screw	

Specifications	Light Source Color	Delivered CCT	Model Number
Input voltage: DC24V	Natural White NL24 -	3100K (3000 - 3200K)	LRFTH-T*W-NL24-DF-I-12
Wattage: 12W/m	- Warm white		
Max. length per circuit: 4m			
Weight: 67g (@L1000)	N 5000K	4200K (4100 - 4300K)	
Environment: Indoor (No Condensation)	L24 2400K	2300K (2200 - 2400K)	
Accessories: Mounting clip			
Mounting rail			
Aluminum mounting rail			
Rail cover, Magnet set			

Job / Project Name	Area / Location / Circuit No.
Product Code	Qty.
	Length (mm)

RIMiT flex series

Luci RIMiT flex THOF




Luci RIMiT flex (One end lead wire, Indoor)


Luci Pte., Ltd.

2026.02.01


front view

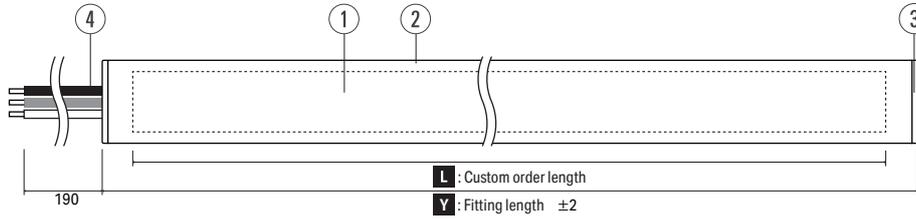

side view




Installation dimensions (Side view)

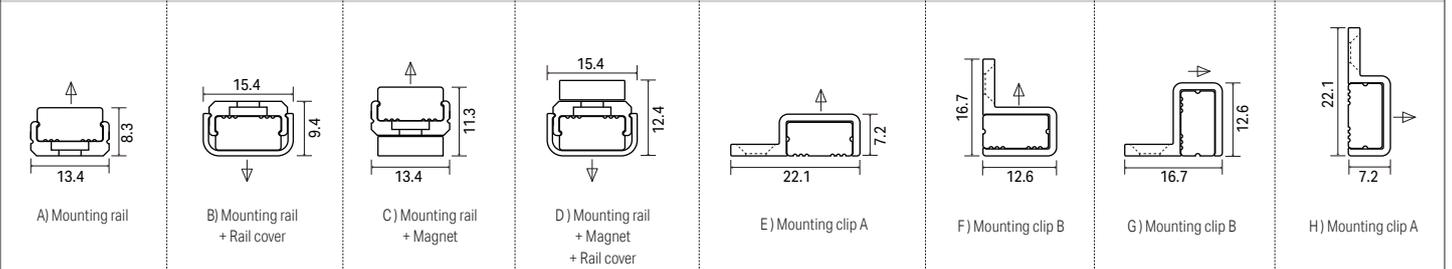


Accessories


Magnet set R for rail (MG-R) 4set/box




Mounting clip A for RIMiT flex (LRF-PT-A) 5pcs/1bag




Mounting clip B for RIMiT flex (LRF-PT-B) 5pcs/1bag




Outercap B for RIMiT flex (LRF-PT-C) 1pc/1bag Attachments



Mounting rail 1000 for RIMiT flex (LRF-RL1000) Aluminum Mounting rail 1000 for RIMiT flex (LRF-RL1000-AL)

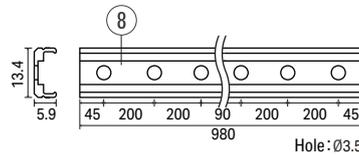

Rail cover for RIMiT flex (LRF-C1000)



Unit Of Measure: mm The specifications and prices are subject to change without prior notice.

Part Name	Material	Note	Drawing
1 Body		Flexible circuit board	
2 Tube	Silicone	Diffuser / White	
3 Cap	Silicone	Diffuser	
4 Lead wire	Copper, Vinyl	UL1007 AWG22, Black:+24V Gray:2ch White:1ch	
5 Mounting clip A	Polycarbonate	Clear	
6 Mounting clip B	Polycarbonate	Clear	
7 Rail cover	Polycarbonate	Clear	
8 Mounting rail	Polycarbonate / Aluminum	White / Alumite treatment, White painting	
9 -	-	-	

Specifications	Light Source Color	Delivered CCT	Model Number
Input voltage: DC24V	Natural White NL24 -	3100K (3000 - 3200K)	LRFTH-T*S-NL24-DF-I-12
Wattage: 12W/m	- Warm white		
Max. length per circuit: 4m			
Weight: 67g (@L1000)	N 5000K	4200K (4100 - 4300K)	
Environment: Indoor (No Condensation)	L24 2400K	2300K (2200 - 2400K)	
Accessories: Mounting clip			
Mounting rail			
Aluminum mounting rail			
Rail cover, Magent set			

Job / Project Name Area / Location / Circuit No.

Product Code Qty. Length (mm)

Luci Pte. Ltd.

<http://www.luci.co.jp>
E-mail: info@luci.co.jp

Singapore Regional HQ
Tel: +65-6291-2410

Hong Kong Marketing Office
Tel: +852-2219-8462

RIMiT flex series


Luci RIMiT flex THOF

Luci RIMiT flex (Both ends lead wire, Connector, Indoor)











Luci Pte., Ltd.

2026.02.01

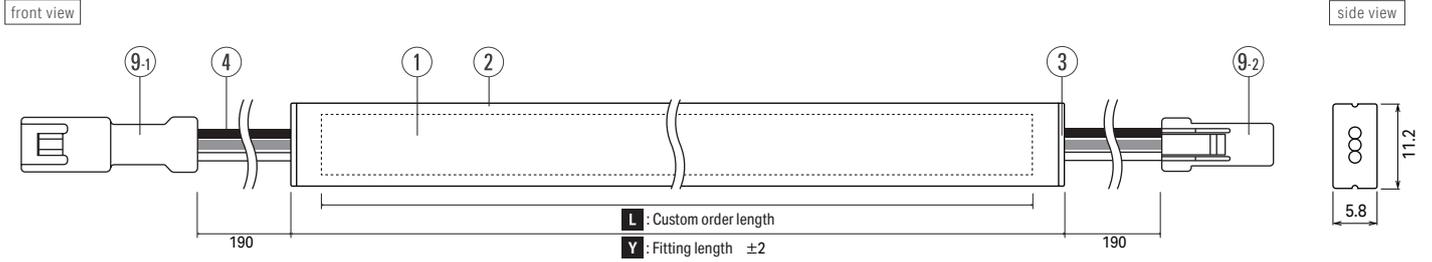

Installation dimensions (Side view)

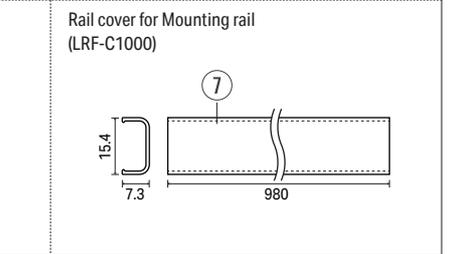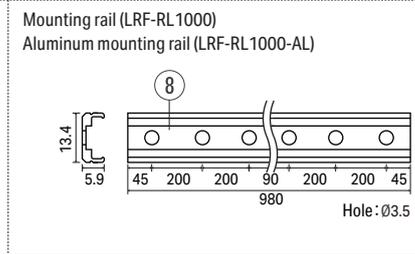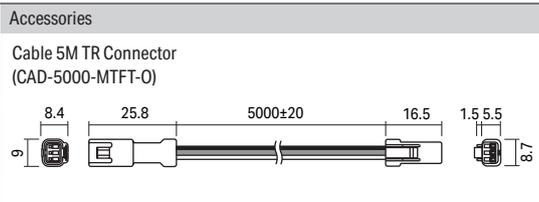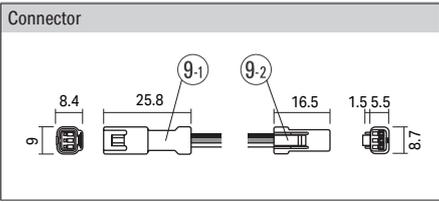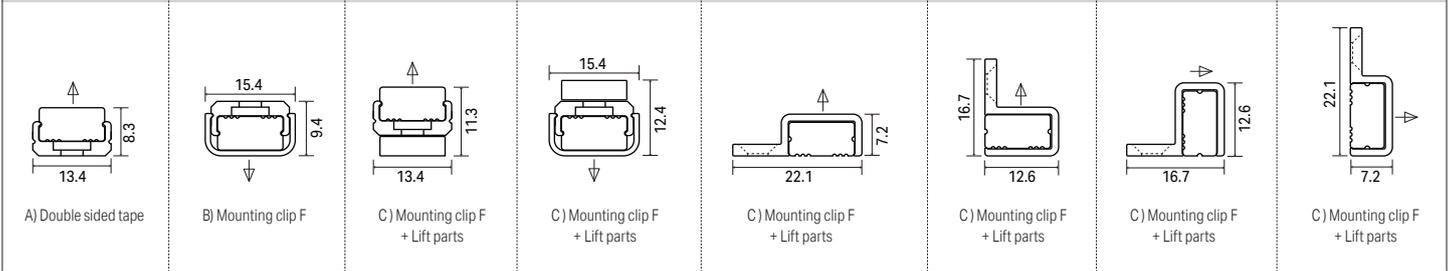

Unit Of Measure: mm The specifications and prices are subject to change without prior notice.

Part Name	Material	Note	Drawing
1 Body		Flexible circuit board	
2 Tube	Silicone	Diffuser / White	
3 Cap	Silicone	Diffuser	
4 Lead wire	Copper, Vinyl	UL1007 AWG22, Black:+24V Gray:2ch White:1ch	
5 Mounting clip A	Polycarbonate	Clear	
6 Mounting clip B	Polycarbonate	Clear	
7 Rail cover	Polycarbonate	Clear	
8 Mounting rail	Polycarbonate / Aluminum	White / Alumite treatment, White painting	
9 -	-	-	
10 Magnet set	Neogium, Stainless steel, Steel	Magnet, Washer, Plate, Screw	

Specifications	Light Source Color	Delivered CCT	Model Number
Input voltage: DC24V	Natural White NL24 - Warm white	3100K (3000 - 3200K)	LRFTH-T*W-NL24-DF-I-12(C)
Wattage: 12W/m			
Max. length per circuit: 4m			
Weight: 67g (@L1000)	N 5000K	4200K (4100 - 4300K)	
Environment: Indoor (No Condensation)	L24 2400K	2300K (2200 - 2400K)	
Accessories: Mounting clip			
Mounting rail			
Aluminum mounting rail			
Rail cover, Magnet set			

Job / Project Name _____ Area / Location / Circuit No. _____

Product Code _____ Qty. _____ Length (mm) _____

Luci Pte. Ltd.

<http://www.luci.co.jp>
E-mail: info@luci.co.jp

Singapore Regional HQ
Tel: +65-6291-2410

Hong Kong Marketing Office
Tel: +852-2219-8462

RIMiT flex series


Luci RIMiT flex THOF






Luci RIMiT flex (One end lead wire, Connector, Indoor)

Luci Pte., Ltd.

2026.02.01

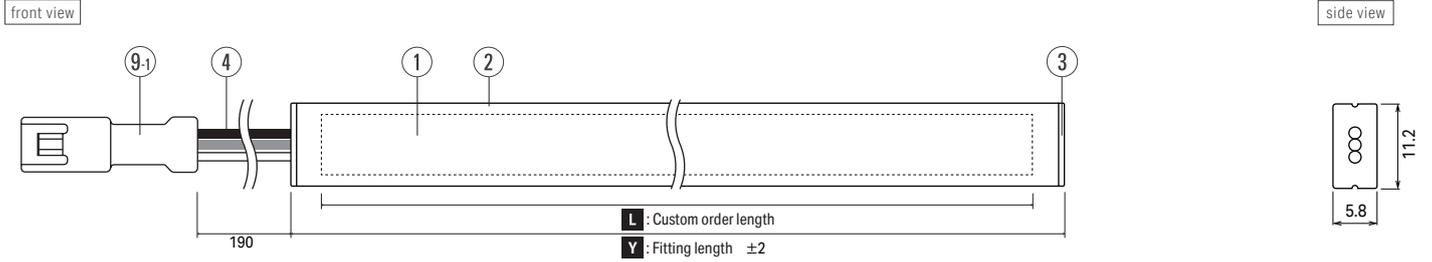

Installation dimensions (Side view)

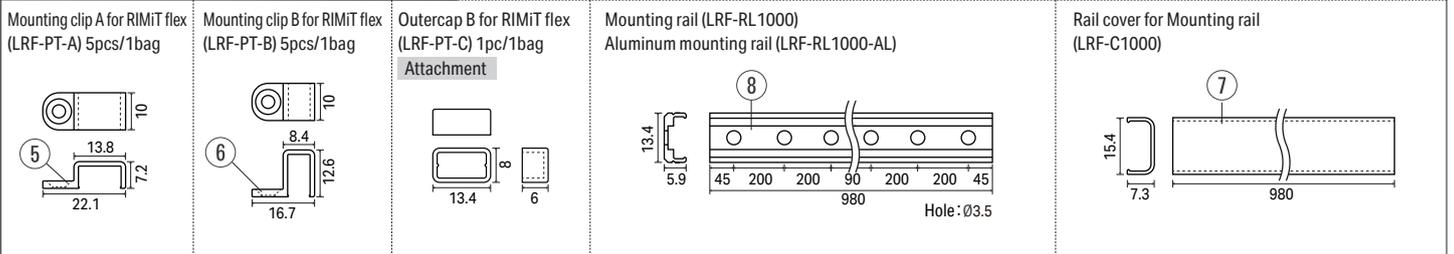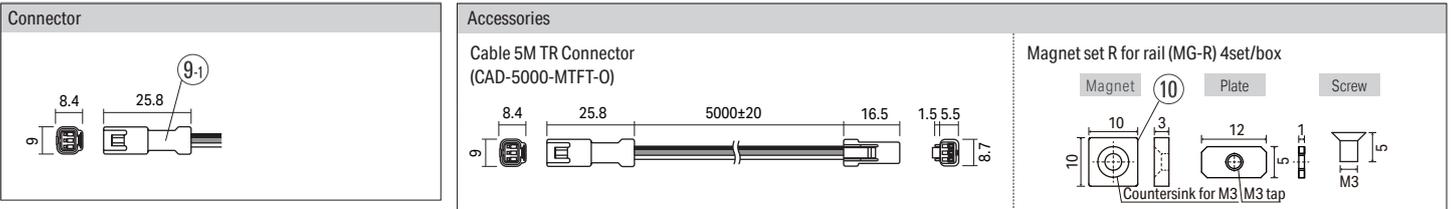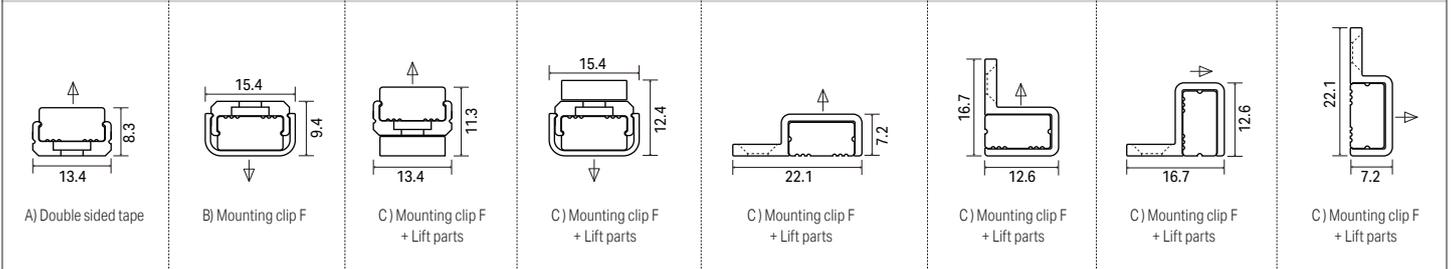

Unit Of Measure: mm The specifications and prices are subject to change without prior notice.

Part Name	Material	Note	Drawing
1 Body		Flexible circuit board	
2 Tube	Silicone	Diffuser / White	
3 Cap	Silicone	Diffuser	
4 Lead wire	Copper, Vinyl	UL1007 AWG22, Black:+24V Gray:2ch White:1ch	
5 Mounting clip A	Polycarbonate	Clear	
6 Mounting clip B	Polycarbonate	Clear	
7 Rail cover	Polycarbonate	Clear	
8 Mounting rail	Polycarbonate / Aluminum	White / Alumite treatment, White painting	
9 -	-	-	
10 Magnet set	Neogium, Stainless steel, Steel	Magnet, Washer, Plate, Screw	

Specifications	Light Source Color	Delivered CCT	Model Number
Input voltage: DC24V	Natural White NL24 - Warm white	3100K (3000 - 3200K)	LRFTH-T*S-NL24-DF-I-12(C)
Wattage: 12W/m			
Max. length per circuit: 4m			
Weight: 67g (@L1000)	N 5000K	4200K (4100 - 4300K)	
Environment: Indoor (No Condensation)	L24 2400K	2300K (2200 - 2400K)	
Accessories: Mounting clip			
Mounting rail			
Aluminum mounting rail			
Rail cover, Magnet set			

Job / Project Name _____ Area / Location / Circuit No. _____

Product Code _____ Qty. _____ Length (mm) _____

Luci Pte. Ltd.

<http://www.luci.co.jp>
E-mail: info@luci.co.jp

Singapore Regional HQ
Tel: +65-6291-2410

Hong Kong Marketing Office
Tel: +852-2219-8462

Luci RIMiT flex THOF Indoor

LRFTH - T Length W/S - NL24 - DF - I - 12

Specifications by length

Length	Fitting length Y (mm)	Wattage (W)
0025	37	0.3
0050	62	0.6
0075	87	0.9
0100	112	1.2
0125	137	1.5
0150	162	1.8
0175	187	2.1
0200	212	2.4
0225	237	2.7
0250	262	3.0
0275	287	3.3
0300	312	3.6
0325	337	3.9
0350	362	4.2
0375	387	4.5
0400	412	4.8
0425	437	5.1
0450	462	5.4
0475	487	5.7
0500	512	6.0
0525	537	6.3
0550	562	6.6
0575	587	6.9
0600	612	7.2
0625	637	7.5
0650	662	7.8
0675	687	8.1
0700	712	8.4
0725	737	8.7
0750	762	9.0
0775	787	9.3
0800	812	9.6
0825	837	9.9
0850	862	10.2
0875	887	10.5
0900	912	10.8
0925	937	11.1
0950	962	11.4
0975	987	11.7
1000	1012	12.0
1025	1038	12.3
1050	1063	12.6
1075	1088	12.9
1100	1113	13.2
1125	1138	13.5
1150	1163	13.8
1175	1188	14.1
1200	1213	14.4
1225	1238	14.7
1250	1263	15.0

Length	Fitting length Y (mm)	Wattage (W)
1275	1288	15.3
1300	1313	15.6
1325	1338	15.9
1350	1363	16.2
1375	1388	16.5
1400	1413	16.8
1425	1438	17.1
1450	1463	17.4
1475	1488	17.7
1500	1513	18.0
1525	1538	18.3
1550	1563	18.6
1575	1588	18.9
1600	1613	19.2
1625	1638	19.5
1650	1663	19.8
1675	1688	20.1
1700	1713	20.4
1725	1738	20.7
1750	1763	21.0
1775	1788	21.3
1800	1813	21.6
1825	1838	21.9
1850	1863	22.2
1875	1888	22.5
1900	1913	22.8
1925	1938	23.1
1950	1963	23.4
1975	1988	23.7
2000	2013	24.0
2025	2039	24.3
2050	2064	24.6
2075	2089	24.9
2100	2114	25.2
2125	2139	25.5
2150	2164	25.8
2175	2189	26.1
2200	2214	26.4
2225	2239	26.7
2250	2264	27.0
2275	2289	27.3
2300	2314	27.6
2325	2339	27.9
2350	2364	28.2
2375	2389	28.5
2400	2414	28.8
2425	2439	29.1
2450	2464	29.4
2475	2489	29.7
2500	2514	30.0

Length	Fitting length Y (mm)	Wattage (W)
2525	2539	30.3
2550	2564	30.6
2575	2589	30.9
2600	2614	31.2
2625	2639	31.5
2650	2664	31.8
2675	2689	32.1
2700	2714	32.4
2725	2739	32.7
2750	2764	33.0
2775	2789	33.3
2800	2814	33.6
2825	2839	33.9
2850	2864	34.2
2875	2889	34.5
2900	2914	34.8
2925	2939	35.1
2950	2964	35.4
2975	2989	35.7
3000	3014	36.0
3025	3040	36.3
3050	3065	36.6
3075	3090	36.9
3100	3115	37.2
3125	3140	37.5
3150	3165	37.8
3175	3190	38.1
3200	3215	38.4
3225	3240	38.7
3250	3265	39.0
3275	3290	39.3
3300	3315	39.6
3325	3340	39.9
3350	3365	40.2
3375	3390	40.5
3400	3415	40.8
3425	3440	41.1
3450	3465	41.4
3475	3490	41.7
3500	3515	42.0
3525	3540	42.3
3550	3565	42.6
3575	3590	42.9
3600	3615	43.2
3625	3640	43.5
3650	3665	43.8
3675	3690	44.1
3700	3715	44.4
3725	3740	44.7
3750	3765	45.0

Length	Fitting length Y (mm)	Wattage (W)
3775	3790	45.3
3800	3815	45.6
3825	3840	45.9
3850	3865	46.2
3875	3890	46.5
3900	3915	46.8
3925	3940	47.1
3950	3965	47.4
3975	3990	47.7
4000	4015	48.0

Photometry characteristic

Light source color	Output	Luminous flux	Luminaire efficiency
NL24	N 100% / L24 0%	354 lm	52.2 lm/W
	N 0% / L24 100%	626 lm	
	N 100% / L24 100%	270 lm	