
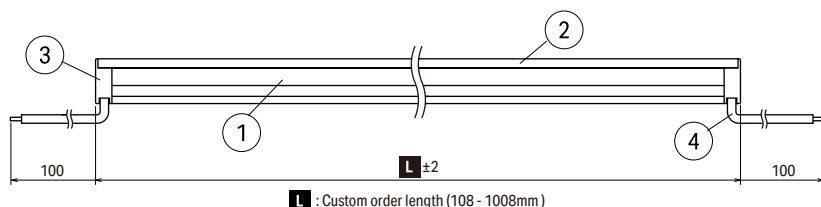


front view



side view




L : Custom order length (108 - 1008mm)




side view




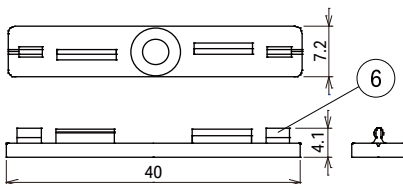

Installation dimensions (Side view)




A) Mounting clip D

B) Mounting clip
+ MagnetC) Mounting clip D
+ Lift partsD) Mounting clip
+ Lift parts

Accessories

Mounting clip for RIMiT kk
(LRMCK-PT-C) 5pcs/1bagMounting clip D
(LRM-PT-D) 5pcs/1bagLift parts for RIMiT
(LRM-PT-B) 5pcs/1bag

Part Name	Material	Note	Drawing
1 Body	Aluminum	Alumite treatment, White painting	
2 Cover	Polycarbonate	Diffuser	
3 Side cover	ABS	White	
4 Lead wire		UL1007 AWG26 Black:+ White:-	
5 Mounting clip for RIMiT kk	Polycarbonate	Clear	
6 Mounting clip D	Polycarbonate	Clear	
7 Lift parts	Polycarbonate	Clear	
8			
9			
10			

Specifications	Light Source Color	Deliverd CCT	6.4W/m	8.6W/m	Model Number
Input voltage: DC24V	Natural White N	4600K Ra 94	416 lm	521 lm	LRMKK-T*W-N-DF-I-*
Wattage: 6.4W/m, 8.6W/m	White W	3700K Ra 92	404 lm	503 lm	LRMKK-T*W-W-DF-I-*
Max. length per curcuit: 3.5m	Warm white WW	3300K Ra 94	366 lm	459 lm	LRMKK-T*W-WW-DF-I-*
Weight: 70g (@L1008)	Warm white L30	2900K Ra 92	355 lm	446 lm	LRMKK-T*W-L30-DF-I-*
Environment: Indoor (No Condensation)	Warm white L27	2600K Ra 92	340 lm	427 lm	LRMKK-T*W-L27-DF-I-*
Accessories: Mounting clip for RIMiT kk	Warm white L24	2400K Ra 91	338 lm	424 lm	LRMKK-T*W-L24-DF-I-*
Mounting clip D					
Lift parts					

Job / Project Name

Area / Location / Circuit No.

Product Code

Qty.

Length (mm)

Luci Pte. Ltd.
Singapore World HQ
Tel: +65-6291-2410

<http://www.luci.co.jp>
Hong Kong Marketing Office
Tel: +852-2219-8462

E-mail: info@luci.co.jp
Korea Office
Tel: +82-2-508-2541

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.
Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115

RIMiT series

Luci RIMiT kk

Luci RIMiT kk (Both ends lead wire, Connector)



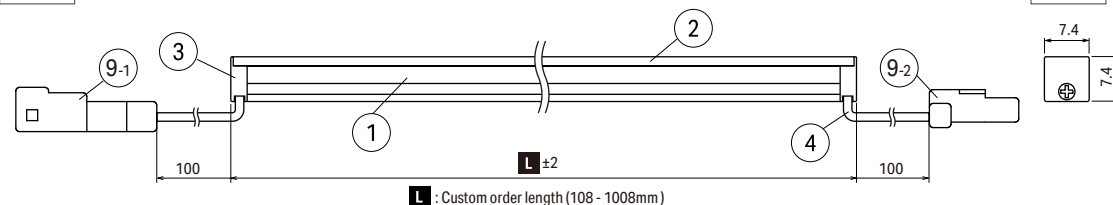
Luci Pte., Ltd.

2025.10.08

front view



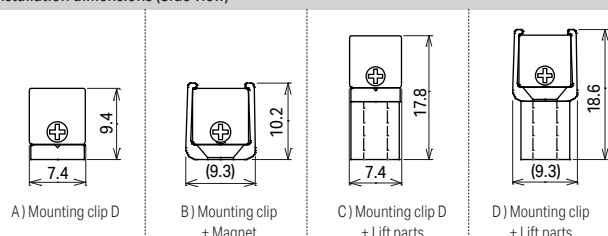
side view




side view




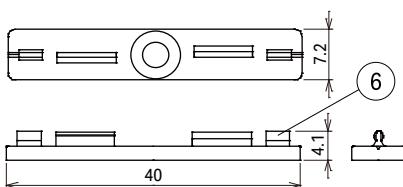


Installation dimensions (Side view)



Connector



Accessories

Mounting clip for RIMiT kk
(LRMKK-PT-C) 5pcs/1bagMounting clip D
(LRM-PT-D) 5pcs/1bagLift parts for RIMiT
(LRM-PT-B) 5pcs/1bagPower supply cable 3M with TR connector
(CAD-3000-MEFE-O)

Part Name	Material	Note	Drawing
1 Body	Aluminum	Alumite treatment, White painting	
2 Cover	Polycarbonate	Diffuser	
3 Side cover	ABS	White	
4 Lead wire		UL1007 AWG26 Black:+ White:-	
5 Mounting clip for RIMiT kk	Polycarbonate	Clear	
6 Mounting clip D	Polycarbonate	Clear	
7 Lift parts	Polycarbonate	Clear	
8 Connector	Nylon	8-1:SLR-02VF(JST) White, 8-2:SLP-02V(JST) White	
9			
10			

Specifications	Light Source Color	Deliverd CCT	6.4W/m	8.6W/m	Model Number
Input voltage: DC24V	Natural White N	4600K Ra 94	416 lm	521 lm	LRMKK-T*W-N-DF-I-*(C)
Wattage: 6.4W/m, 8.6W/m	White W	3700K Ra 92	404 lm	503 lm	LRMKK-T*W-W-DF-I-*(C)
Max. length per curcuit: 3.5m	Warm white WW	3300K Ra 94	366 lm	459 lm	LRMKK-T*W-WW-DF-I-*(C)
Weight: 70g (@L1008)	Warm white L30	2900K Ra 92	355 lm	446 lm	LRMKK-T*W-L30-DF-I-*(C)
Environment: Indoor (No Condensation)	Warm white L27	2600K Ra 92	340 lm	427 lm	LRMKK-T*W-L27-DF-I-*(C)
Accessories: Mounting clip for RIMiT kk	Warm white L24	2400K Ra 91	338 lm	424 lm	LRMKK-T*W-L24-DF-I-*(C)
Mounting clip D					
Lift parts					

Job / Project Name

Area / Location / Circuit No.

Product Code

Qty.

Length (mm)

Luci Pte. Ltd.
Singapore World HQ
Tel: +65-6291-2410

<http://www.luci.co.jp>
Hong Kong Marketing Office
Tel: +852-2219-8462

E-mail: info@luci.co.jp
Korea Office
Tel: +82-2-508-2541

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.
Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115

Luci

2025.10.08



Technical drawing of a shaft assembly. The shaft has a total length of 3000 ± 20 . Key dimensions include a diameter of $\varnothing 7.0$ at the left end, a diameter of $\varnothing 8.1$ for the first section, a diameter of $\varnothing 25.8$ for the second section, a diameter of $\varnothing 16.5$ for the third section, and a diameter of $\varnothing 6.7$ at the right end. The shaft is supported by bearings. Callouts 8-1 and 8-2 are present.

Luci Pte. Ltd.	http://www.luci.co.jp	E-mail: info@luci.co.jp	LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.
Singapore World HQ	Hong Kong Marketing Office	Korea Office	Shanghai China mainland Regional HQ
Tel: +65-6291-2410	Tel: +852-2219-8462	Tel: +82-2-508-2541	Tel: +86-21-5238-9115

Luci RIMiT kk _ Custom order length

Length	Model No.	Fitting length (mm)	Wattage (W)		Mounting Clip
			6.4W/m	8.6W/m	
0033	LRMKK-T0033*.*-DF-I*.	32.2	0.2	0.2	1 pcs Recommended pitch 60 to 230mm
0058	LRMKK-T0058*.*-DF-I*.	57.2	0.3	0.4	
0083	LRMKK-T0083*.*-DF-I*.	82.2	0.5	0.6	
0108	LRMKK-T0108*.*-DF-I*.	107.2	0.6	0.9	
0133	LRMKK-T0133*.*-DF-I*.	132.2	0.8	1.1	
0158	LRMKK-T0158*.*-DF-I*.	157.2	1.0	1.3	
0183	LRMKK-T0183*.*-DF-I*.	182.2	1.1	1.5	
0208	LRMKK-T0208*.*-DF-I*.	207.2	1.3	1.7	
0233	LRMKK-T0233*.*-DF-I*.	232.2	1.4	1.9	
0258	LRMKK-T0258*.*-DF-I*.	257.2	1.6	2.1	
0283	LRMKK-T0283*.*-DF-I*.	282.2	1.8	2.4	3 pcs Recommended pitch 140 to 370mm
0308	LRMKK-T0308*.*-DF-I*.	307.2	1.9	2.6	
0333	LRMKK-T0333*.*-DF-I*.	332.2	2.1	2.8	
0358	LRMKK-T0358*.*-DF-I*.	357.2	2.2	3.0	
0383	LRMKK-T0383*.*-DF-I*.	382.2	2.4	3.2	
0408	LRMKK-T0408*.*-DF-I*.	407.2	2.6	3.4	
0433	LRMKK-T0433*.*-DF-I*.	432.2	2.7	3.6	
0458	LRMKK-T0458*.*-DF-I*.	457.2	2.9	3.9	
0483	LRMKK-T0483*.*-DF-I*.	482.2	3.0	4.1	
0508	LRMKK-T0508*.*-DF-I*.	507.2	3.2	4.3	
0533	LRMKK-T0533*.*-DF-I*.	532.2	3.4	4.5	
0558	LRMKK-T0558*.*-DF-I*.	557.2	3.5	4.7	
0583	LRMKK-T0583*.*-DF-I*.	582.2	3.7	4.9	
0608	LRMKK-T0608*.*-DF-I*.	607.2	3.8	5.1	
0633	LRMKK-T0633*.*-DF-I*.	632.2	4.0	5.4	
0658	LRMKK-T0658*.*-DF-I*.	657.2	4.2	5.6	
0683	LRMKK-T0683*.*-DF-I*.	682.2	4.3	5.8	
0708	LRMKK-T0708*.*-DF-I*.	707.2	4.5	6.0	
0733	LRMKK-T0733*.*-DF-I*.	732.2	4.6	6.2	
0758	LRMKK-T0758*.*-DF-I*.	757.2	4.8	6.4	
0783	LRMKK-T0783*.*-DF-I*.	782.2	5.0	6.6	4 pcs Recommended pitch 250 to 400mm
0808	LRMKK-T0808*.*-DF-I*.	807.2	5.1	6.8	
0833	LRMKK-T0833*.*-DF-I*.	832.2	5.3	7.1	
0858	LRMKK-T0858*.*-DF-I*.	857.2	5.4	7.3	
0883	LRMKK-T0883*.*-DF-I*.	882.2	5.6	7.5	
0908	LRMKK-T0908*.*-DF-I*.	907.2	5.8	7.7	
0933	LRMKK-T0933*.*-DF-I*.	932.2	5.9	7.9	
0958	LRMKK-T0958*.*-DF-I*.	957.2	6.1	8.1	
0983	LRMKK-T0983*.*-DF-I*.	982.2	6.2	8.3	
1008	LRMKK-T1008*.*-DF-I*.	1007.2	6.4	8.6	
1033	LRMKK-T1033*.*-DF-I*.	1032.2	6.6	8.8	
1058	LRMKK-T1058*.*-DF-I*.	1057.2	6.7	9.0	
1083	LRMKK-T1083*.*-DF-I*.	1082.2	6.9	9.2	
1108	LRMKK-T1108*.*-DF-I*.	1107.2	7.0	9.4	
1133	LRMKK-T1133*.*-DF-I*.	1132.2	7.2	9.6	
1158	LRMKK-T1158*.*-DF-I*.	1157.2	7.4	9.8	
1183	LRMKK-T1183*.*-DF-I*.	1182.2	7.5	10.1	
1208	LRMKK-T1208*.*-DF-I*.	1207.2	7.7	10.3	
1233	LRMKK-T1233*.*-DF-I*.	1232.2	7.8	10.5	
1258	LRMKK-T1258*.*-DF-I*.	1257.2	8.0	10.7	
1283	LRMKK-T1283*.*-DF-I*.	1282.2	8.2	10.9	5 pcs Recommended pitch 315 to 375mm
1308	LRMKK-T1308*.*-DF-I*.	1307.2	8.3	11.1	
1333	LRMKK-T1333*.*-DF-I*.	1332.2	8.5	11.3	
1358	LRMKK-T1358*.*-DF-I*.	1357.2	8.6	11.6	
1383	LRMKK-T1383*.*-DF-I*.	1382.2	8.8	11.8	
1408	LRMKK-T1408*.*-DF-I*.	1407.2	9.0	12.0	
1433	LRMKK-T1433*.*-DF-I*.	1432.2	9.1	12.2	
1458	LRMKK-T1458*.*-DF-I*.	1457.2	9.3	12.4	
1483	LRMKK-T1483*.*-DF-I*.	1482.2	9.4	12.6	
1508	LRMKK-T1508*.*-DF-I*.	1507.2	9.6	12.8	

Accessories

LRMKK-PT-C	Mounting clip for RIMiT kk 5pcs/1bag
LRM-PT-D	Mounting clip D for RIMiT 5pcs/1bag
LRM-PT-B	Lift Parts for RIMiT 5pcs/1bag