



front view




side view

side view

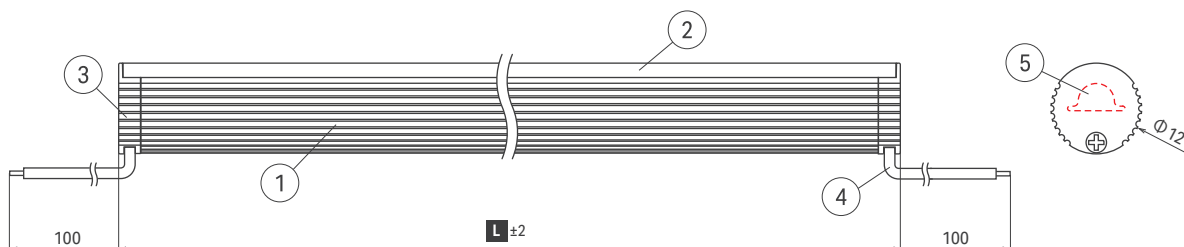


L : Custom order length (108 - 1008mm)

Installation dimensions (Side view)

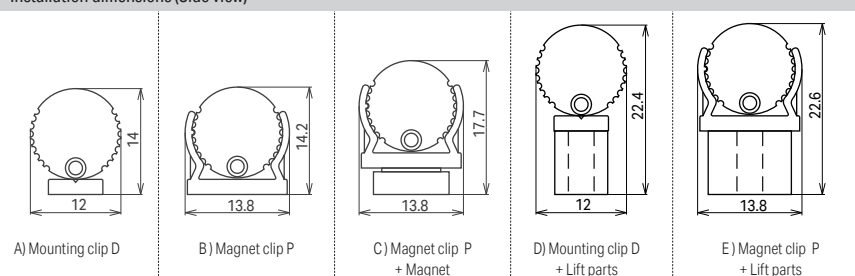


Accessories


Mounting clip P for RIMiT lens
(LRMLE-PT-P) 5pcs/1bag
Angle adjustable in approx. 10° increments




Magnet clip D
(LRM-PT-D) 5pcs/1bag




Lift parts
(LRM-PT-B) 5pcs/1bag



Magnet set A
(MG-A) 5pcs/1bag

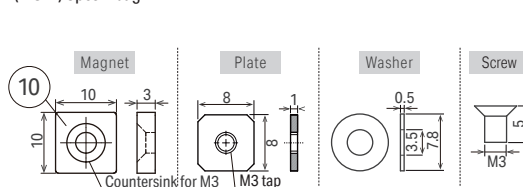

Part Name	Material	Note	Drawing
1 Body	Aluminum	Alumite treatment, White painting	
2 Cover	Polycarbonate	Diffuser	
3 Side cover	ABS	White	
4 Lead wire	Acrylic	Clear	
5 Lens	Polycarbonate	Clear	
6 Mounting clip P for RIMiT lens	Polycarbonate	Clear	
7 Lift parts	Polycarbonate	Clear	
8			
9 Mounting clip P	Polycarbonate	Clear	
10 Magnet set H	Neogium, Stainless steel	Silver	

Specifications	Light Source Color	Delivered CCT	Model Number	
Input voltage: DC24V	Natural White N	4700K Ra 92	504 lm	LRMLE-T*W-N-DF-I-8 LRMLE-T*W-W-DF-I-8 LRMLE-T*W-WW-DF-I-8 LRMLE-T*W-L30-DF-I-8 LRMLE-T*W-L27-DF-I-8 LRMLE-T*W-L24-DF-I-8
Wattage: 8.6W/m	White W	3600K Ra 91	550 lm	
Max. length per circuit: 4m	Warm white WW	3300K Ra 91	488 lm	
Weight: 150g (@L1008)	Warm white L30	2900K Ra 91	446 lm	
Environment: Indoor (No Condensation)	Warm white L27	2600K Ra 91	456 lm	
Accessories: Mounting clip P for RIMiT lens	Warm white L24	2300K Ra 91	389 lm	
Mounting clip D				
Lift parts				
Magnet set A				

Job / Project Name

Area / Location / Circuit No.

Product Code

Qty.

Length (mm)

Luci Pte. Ltd.
Singapore World HQ
Tel: +65-6291-2410

<http://www.luci.co.jp>
Hong Kong Marketing Office
Tel: +852-2219-8462

E-mail: info@luci.co.jp
Korea Office
Tel: +82-2-508-2541


LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.
Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115

front view




side view

side view

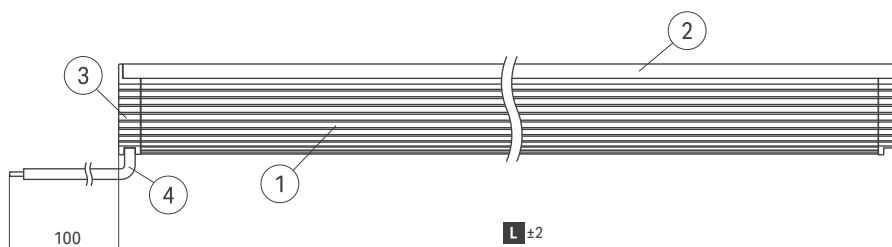


L : Custom order length (108 - 1008mm)

Installation dimensions (Side view)

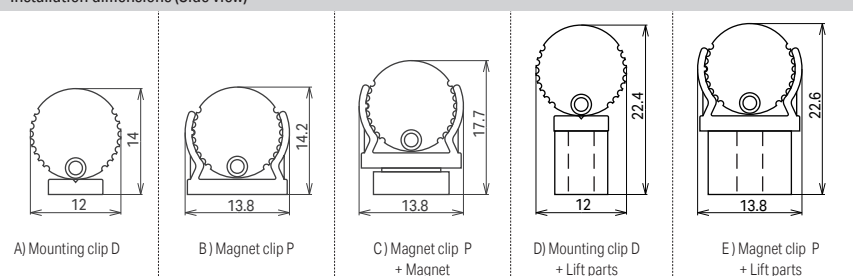


Accessories


Mounting clip P for RIMiT lens
(LRMLE-PT-P) 5pcs/1bag
Angle adjustable in approx. 10° increments




Magnet clip D
(LRM-PT-D) 5pcs/1bag




Lift parts
(LRM-PT-B) 5pcs/1bag



Magnet set A
(MG-A) 5pcs/1bag

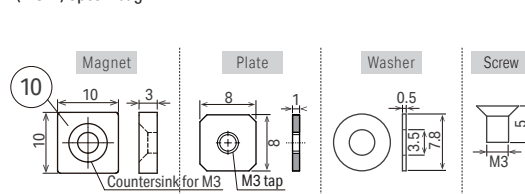

Part Name	Material	Note	Drawing
1 Body	Aluminum	Alumite treatment, White painting	
2 Cover	Polycarbonate	Diffuser	
3 Side cover	ABS	White	
4 Lead wire	Acrylic	Clear	
5 Lens	Polycarbonate	Clear	
6 Mounting clip P for RIMiT lens	Polycarbonate	Clear	
7 Lift parts	Polycarbonate	Clear	
8			
9 Mounting clip P	Polycarbonate	Clear	
10 Magnet set H	Neogium, Stainless steel	Silver	

Specifications	Light Source Color	Delivered CCT	Model Number	
Input voltage: DC24V	Natural White N	4700K Ra 92	504 lm	LRMLE-T*W-N-DF-I-8 LRMLE-T*W-W-DF-I-8 LRMLE-T*W-WW-DF-I-8 LRMLE-T*W-L30-DF-I-8 LRMLE-T*W-L27-DF-I-8 LRMLE-T*W-L24-DF-I-8
Wattage: 8.6W/m	White W	3600K Ra 91	550 lm	
Max. length per circuit: 4m	Warm white WW	3300K Ra 91	488 lm	
Weight: 150g (@L1008)	Warm white L30	2900K Ra 91	446 lm	
Environment: Indoor (No Condensation)	Warm white L27	2600K Ra 91	456 lm	
Accessories: Mounting clip P for RIMiT lens	Warm white L24	2300K Ra 91	389 lm	
Mounting clip D				
Lift parts				
Magnet set A				

Job / Project Name

Area / Location / Circuit No.

Product Code

Qty.

Length (mm)

Luci Pte. Ltd.
Singapore World HQ
Tel: +65-6291-2410

<http://www.luci.co.jp>
Hong Kong Marketing Office
Tel: +852-2219-8462

E-mail: info@luci.co.jp
Korea Office
Tel: +82-2-508-2541

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.
Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115


RIMiT series

Luci RIMiT lens

Luci RIMiT lens (Both ends lead wire, Connector)


Luci Pte. Ltd.

2025.10.08

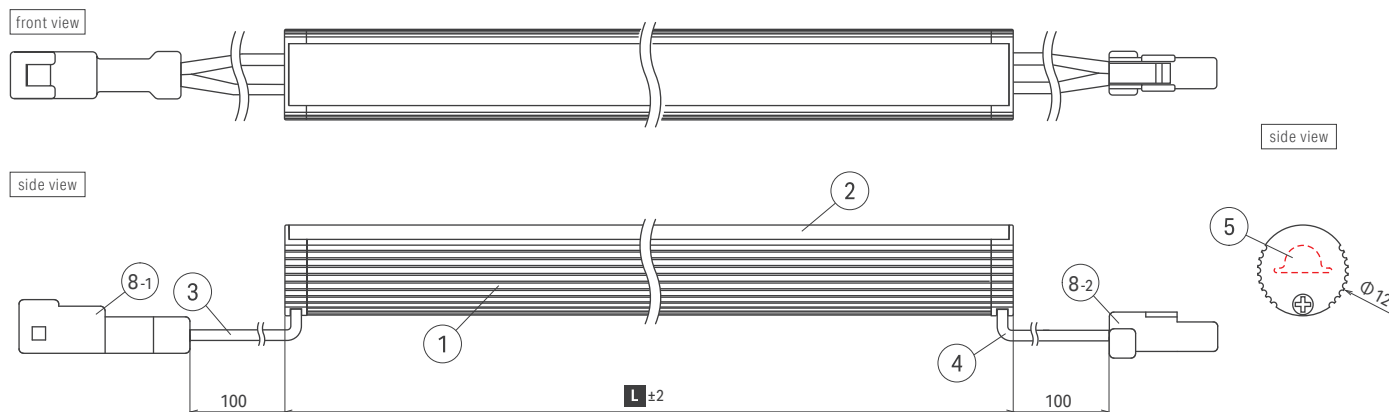


L : Custom order length (108 - 1008mm)





Installation dimensions (Side view)

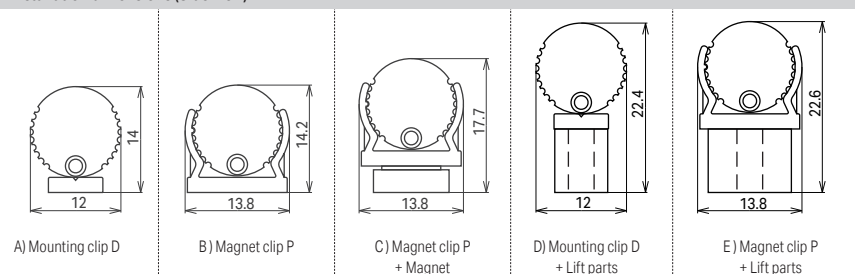

Connector



Accessories

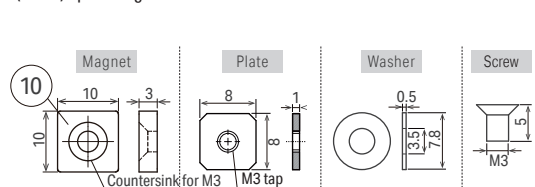Power supply cable 3M with TR connector
(CAD-3000-MEFE-0)Mounting clip P for RIMiT lens
(LRMLE-PT-P) 5pcs/1bag
Angle adjustable in approx. 10° incrementsMagnet clip D
(LRM-PT-D) 5pcs/1bagLift parts
(LRM-PT-B) 5pcs/1bagMagnet set A
(MG-A) 5pcs/1bag

Part Name	Material	Note	Drawing
1 Body	Aluminum	Alumite treatment, White painting	
2 Cover	Polycarbonate	Diffuser	
3 Side cover	ABS	White	
4 Lead wire	Acrylic	Clear	
5 Lens	Polycarbonate	Clear	
6 Mounting clip P for RIMiT lens	Polycarbonate	Clear	
7 Lift parts	Polycarbonate	Clear	
8 Connector	Nylon	8-1:SLR-02VF(JST) White, 8-2:SLP-02V(JST) White	
9 Mounting clip P	Polycarbonate	Clear	
10 Magnet set H	Neogium, Stainless steel	Silver	

Specifications	Light Source Color	Delivered CCT	Model Number
Input voltage: DC24V	Natural White N	4700K Ra 92	LRMLE-T*W-N-DF-I-8
Wattage: 8.6W/m	White W	3600K Ra 91	LRMLE-T*W-W-DF-I-8
Max. length per circuit: 4m	Warm white WW	3300K Ra 91	LRMLE-T*W-WW-DF-I-8
Weight: 150g (@L1008)	Warm white L30	2900K Ra 91	LRMLE-T*W-L30-DF-I-8
Environment: Indoor (No Condensation)	Warm white L27	2600K Ra 91	LRMLE-T*W-L27-DF-I-8
Accessories: Mounting clip P for RIMiT lens	Warm white L24	2300K Ra 91	LRMLE-T*W-L24-DF-I-8
Mounting clip D			
Lift parts			
Magnet set A			

Job / Project Name


Area / Location / Circuit No.

Product Code


Qty.

Length (mm)

Luci Pte. Ltd.
Singapore World HQ
Tel: +65-6291-2410<http://www.luci.co.jp>
Hong Kong Marketing Office
Tel: +852-2219-8462E-mail: info@luci.co.jp
Korea Office
Tel: +82-2-508-2541LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.
Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115

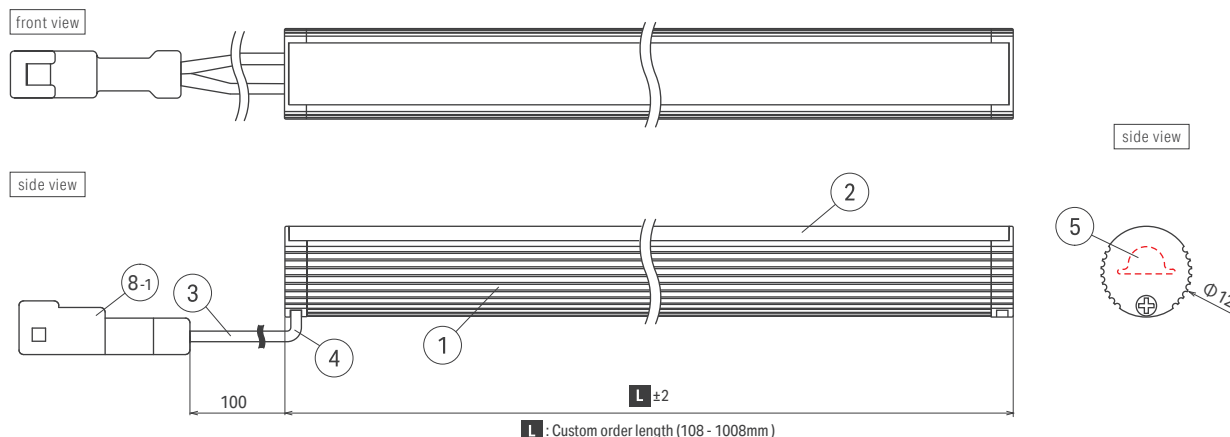

Installation dimensions (Side view)

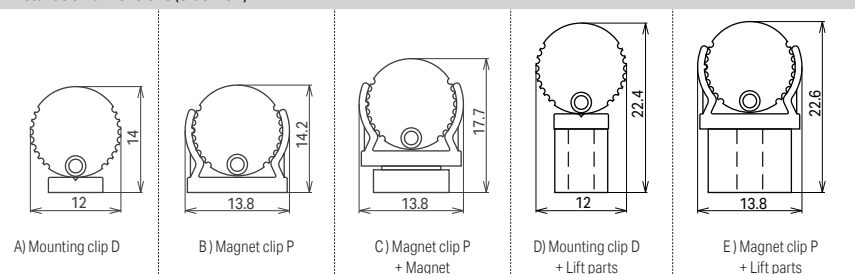


Connector




Accessories


Power supply cable 3M with TR connector
(CAD-3000-MEFE-O)




Mounting clip P for RIMiT lens
(LRMLE-PT-P) 5pcs/1bag
Angle adjustable in approx. 10° increments




Magnet clip D
(LRM-PT-D) 5pcs/1bag




Lift parts
(LRM-PT-B) 5pcs/1bag



Magnet set A
(MG-A) 5pcs/1bag

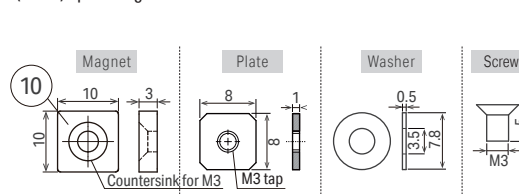

Part Name	Material	Note	Drawing
1 Body	Aluminum	Alumite treatment, White painting	
2 Cover	Polycarbonate	Diffuser	
3 Side cover	ABS	White	
4 Lead wire	Acrylic	Clear	
5 Lens	Polycarbonate	Clear	
6 Mounting clip P for RIMiT lens	Polycarbonate	Clear	
7 Lift parts	Polycarbonate	Clear	
8 Connector	Nylon	8-1:SLR-02VF(JST) White	
9 Mounting clip P	Polycarbonate	Clear	
10 Magnet set H	Neogium, Stainless steel	Silver	

Specifications	Light Source Color	Delivered CCT	Model Number	
Input voltage: DC24V	Natural White N	4700K Ra 92	504 lm	LRMLE-T*W-N-DF-I-8 LRMLE-T*W-W-DF-I-8 LRMLE-T*W-WW-DF-I-8 LRMLE-T*W-L30-DF-I-8 LRMLE-T*W-L27-DF-I-8 LRMLE-T*W-L24-DF-I-8
Wattage: 8.6W/m	White W	3600K Ra 91	550 lm	
Max. length per circuit: 4m	Warm white WW	3300K Ra 91	488 lm	
Weight: 150g (@L1008)	Warm white L30	2900K Ra 91	446 lm	
Environment: Indoor (No Condensation)	Warm white L27	2600K Ra 91	456 lm	
Accessories: Mounting clip P for RIMiT lens	Warm white L24	2300K Ra 91	389 lm	
Mounting clip D				
Lift parts				
Magnet set A				

Job / Project Name

Area / Location / Circuit No.

Product Code

Qty.

Length (mm)

Luci Pte. Ltd.
Singapore World HQ
Tel: +65-6291-2410

<http://www.luci.co.jp>
Hong Kong Marketing Office
Tel: +852-2219-8462

E-mail: info@luci.co.jp
Korea Office
Tel: +82-2-508-2541

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.
Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115

Luci RIMiT lens _ Custom order length

Length	Model No.	Fitting length (mm)	Wattage (W)	Mounting Clip
0033	LRMLE-T0033*-*-DF-I-8	32.2	0.2	1 pcs Recommended pitch 60 to 230mm
0058	LRMLE-T0058*-*-DF-I-8	57.2	0.4	
0083	LRMLE-T0083*-*-DF-I-8	82.2	0.6	
0108	LRMLE-T0108*-*-DF-I-8	107.2	0.9	
0133	LRMLE-T0133*-*-DF-I-8	132.2	1.1	
0158	LRMLE-T0158*-*-DF-I-8	157.2	1.3	
0183	LRMLE-T0183*-*-DF-I-8	182.2	1.5	
0208	LRMLE-T0208*-*-DF-I-8	207.2	1.7	
0233	LRMLE-T0233*-*-DF-I-8	232.2	1.9	
0258	LRMLE-T0258*-*-DF-I-8	257.2	2.1	3 pcs Recommended pitch 140 to 370mm
0283	LRMLE-T0283*-*-DF-I-8	282.2	2.4	
0308	LRMLE-T0308*-*-DF-I-8	307.2	2.6	
0333	LRMLE-T0333*-*-DF-I-8	332.2	2.8	
0358	LRMLE-T0358*-*-DF-I-8	357.2	3.0	
0383	LRMLE-T0383*-*-DF-I-8	382.2	3.2	
0408	LRMLE-T0408*-*-DF-I-8	407.2	3.4	
0433	LRMLE-T0433*-*-DF-I-8	432.2	3.6	
0458	LRMLE-T0458*-*-DF-I-8	457.2	3.9	
0483	LRMLE-T0483*-*-DF-I-8	482.2	4.1	
0508	LRMLE-T0508*-*-DF-I-8	507.2	4.3	
0533	LRMLE-T0533*-*-DF-I-8	532.2	4.5	
0558	LRMLE-T0558*-*-DF-I-8	557.2	4.7	
0583	LRMLE-T0583*-*-DF-I-8	582.2	4.9	
0608	LRMLE-T0608*-*-DF-I-8	607.2	5.1	
0633	LRMLE-T0633*-*-DF-I-8	632.2	5.4	
0658	LRMLE-T0658*-*-DF-I-8	657.2	5.6	
0683	LRMLE-T0683*-*-DF-I-8	682.2	5.8	
0708	LRMLE-T0708*-*-DF-I-8	707.2	6.0	
0733	LRMLE-T0733*-*-DF-I-8	732.2	6.2	4 pcs Recommended pitch 250 to 400mm
0758	LRMLE-T0758*-*-DF-I-8	757.2	6.4	
0783	LRMLE-T0783*-*-DF-I-8	782.2	6.6	
0808	LRMLE-T0808*-*-DF-I-8	807.2	6.8	
0833	LRMLE-T0833*-*-DF-I-8	832.2	7.1	
0858	LRMLE-T0858*-*-DF-I-8	857.2	7.3	
0883	LRMLE-T0883*-*-DF-I-8	882.2	7.5	
0908	LRMLE-T0908*-*-DF-I-8	907.2	7.7	
0933	LRMLE-T0933*-*-DF-I-8	932.2	7.9	
0958	LRMLE-T0958*-*-DF-I-8	957.2	8.1	
0983	LRMLE-T0983*-*-DF-I-8	982.2	8.3	
1008	LRMLE-T1008*-*-DF-I-8	1007.2	8.6	
1033	LRMLE-T1033*-*-DF-I-8	1032.2	8.8	
1058	LRMLE-T1058*-*-DF-I-8	1057.2	9.0	
1083	LRMLE-T1083*-*-DF-I-8	1082.2	9.2	
1108	LRMLE-T1108*-*-DF-I-8	1107.2	9.4	
1133	LRMLE-T1133*-*-DF-I-8	1132.2	9.6	
1158	LRMLE-T1158*-*-DF-I-8	1157.2	9.8	5 pcs Recommended pitch 315 to 375mm
1183	LRMLE-T1183*-*-DF-I-8	1182.2	10.1	
1208	LRMLE-T1208*-*-DF-I-8	1207.2	10.3	
1233	LRMLE-T1233*-*-DF-I-8	1232.2	10.5	
1258	LRMLE-T1258*-*-DF-I-8	1257.2	10.7	
1283	LRMLE-T1283*-*-DF-I-8	1282.2	10.9	
1308	LRMLE-T1308*-*-DF-I-8	1307.2	11.1	
1333	LRMLE-T1333*-*-DF-I-8	1332.2	11.3	
1358	LRMLE-T1358*-*-DF-I-8	1357.2	11.6	
1383	LRMLE-T1383*-*-DF-I-8	1382.2	11.8	
1408	LRMLE-T1408*-*-DF-I-8	1407.2	12.0	
1433	LRMLE-T1433*-*-DF-I-8	1432.2	12.2	
1458	LRMLE-T1458*-*-DF-I-8	1457.2	12.4	
1483	LRMLE-T1483*-*-DF-I-8	1482.2	12.6	
1508	LRMLE-T1508*-*-DF-I-8	1507.2	12.8	

Accessories

LRMLE-PT-P	Mounting clip P for RIMiT lens 5pcs/1bag
MG-A	Magnet set A 5pcs/1bag
LRM-PT-D	Mounting clip D for RIMiT 5pcs/1bag
LRM-PT-B	Lift Parts for RIMiT 5pcs/1bag