




front view




side view

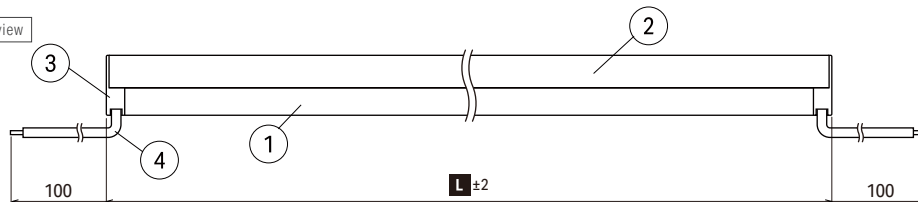






side view


**L** : Custom order length (108 - 1008mm)

Installation dimensions (Side view)

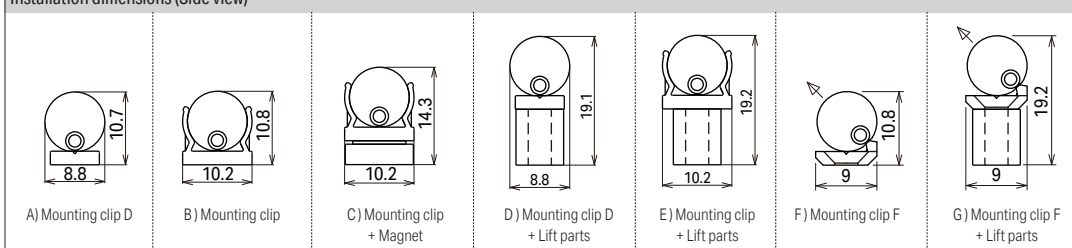

Accessories

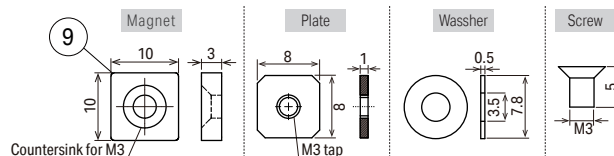
Mounting clip for RIMiT mr
(LRMMR-PT-G) 5pcs/1bagMounting clip D
(LRM-PT-D) 5pcs/1bagMagnet set A
(MG-A) 5pcs/1bagLift parts for RIMiT
(LRM-PT-B) 5pcs/1bagMounting clip F
(LRM-PT-F) 5pcs/1bag

Part Name		Material	Note	Drawing				
1	Body	Aluminum	Alumite treatment, White painting					
2	Cover	Polycarbonate	Diffuser					
3	Side cover	ABS	White					
4	Lead wire		UL1007 AWG26 Black:+ White:-					
5	Mounting clip for RIMiT mr	Polycarbonate	Clear					
6	Mounting clip D	Polycarbonate	Clear					
7	Mounting clip F	Polycarbonate	Clear					
8	Lift parts	Polycarbonate	Clear					
9	Magnet set A	Neogium, Stainless steel	Silver					
10								
Specifications		Light Source Color	Delivered CCT	6.4W/m	8.6W/m	Model Number		
Input voltage: DC24V		Natural White	N	4600K	Ra 91	538 lm	692 lm	LRMMR-T*W-N-DF-I-*
Wattage: 6.4W/m, 8.6W/m		White	W	3700K	Ra 92	541 lm	696 lm	LRMMR-T*W-W-DF-I-*
Max. length per circuit: 3.5m		Warm white	WW	3300K	Ra 92	512 lm	658 lm	LRMMR-T*W-WW-DF-I-*
Weight: 70g (@L1008)		Warm white	L30	2900K	Ra 91	503 lm	648 lm	LRMMR-T*W-L30-DF-I-*
Environment: Indoor (No Condensation)		Warm white	L27	2600K	Ra 92	470 lm	605 lm	LRMMR-T*W-L27-DF-I-*
Accessories: Mounting clip for RIMiT mr		Warm white	L24	2400K	Ra 91	430 lm	565 lm	LRMMR-T*W-L24-DF-I-*
Mounting clip D, F								
Lift parts								
Magnet set A								
Job / Project Name				Area / Location / Circuit No.				
Product Code		Qty.		Length (mm)				
Luci Pte. Ltd.		http://www.luci.co.jp		E-mail: info@luci.co.jp		LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.		
Singapore World HQ		Hong Kong Marketing Office		Korea Office		Shanghai China mainland Regional HQ		
Tel: +65-6291-2410		Tel: +852-2219-8462		Tel: +82-2-508-2541		Tel: +86-21-5238-9115		

front view




side view

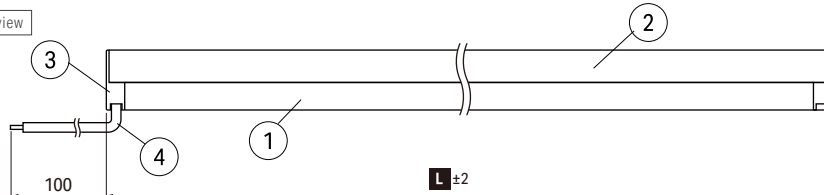


L : Custom order length (108 - 1008mm)

side view




Installation dimensions (Side view)

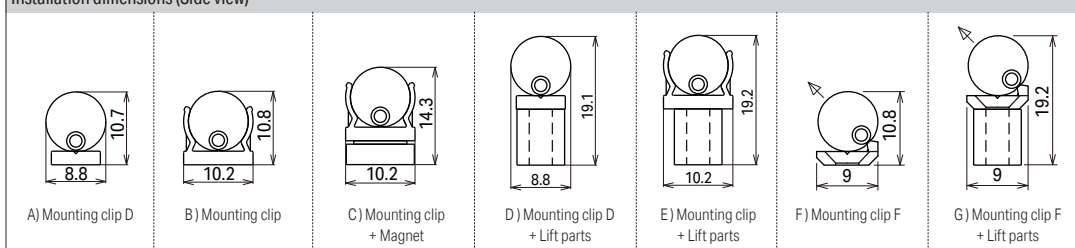


Accessories


Mounting clip for RIMiT mr (LRMMR-PT-G) 5pcs/1bag




Mounting clip D (LRM-PT-D) 5pcs/1bag




Magnet set A (MG-A) 5pcs/1bag

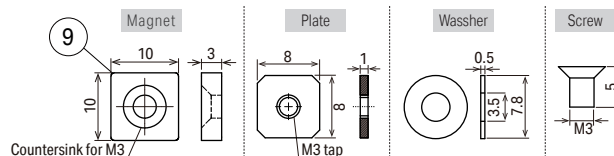


Lift parts for RIMiT (LRM-PT-B) 5pcs/1bag



Mounting clip F (LRM-PT-F) 5pcs/1bag



Part Name	Material	Note	Drawing
1 Body	Aluminum	Alumite treatment, White painting	
2 Cover	Polycarbonate	Diffuser	
3 Side cover	ABS	White	
4 Lead wire		UL1007 AWG26 Black:+ White:-	
5 Mounting clip for RIMiT mr	Polycarbonate	Clear	
6 Mounting clip D	Polycarbonate	Clear	
7 Mounting clip F	Polycarbonate	Clear	
8 Lift parts	Polycarbonate	Clear	
9 Magnet set A	Neogium, Stainless steel	Silver	
10			

Specifications	Light Source Color	Deliverd CCT	6.4W/m	8.6W/m	Model Number
Input voltage: DC24V	Natural White N	4600K Ra 91	538 lm	692 lm	LRMMR-T*S-N-DF-I-*
Wattage: 6.4W/m, 8.6W/m	White W	3700K Ra 92	541 lm	696 lm	LRMMR-T*S-W-DF-I-*
Max. length per circuit: 3.5m	Warm white WW	3300K Ra 92	512 lm	658 lm	LRMMR-T*S-WW-DF-I-*
Weight: 70g (@L1008)	Warm white L30	2900K Ra 91	503 lm	648 lm	LRMMR-T*S-L30-DF-I-*
Environment: Indoor (No Condensation)	Warm white L27	2600K Ra 92	470 lm	605 lm	LRMMR-T*S-L27-DF-I-*
Accessories: Mounting clip for RIMiT mr	Warm white L24	2400K Ra 91	430 lm	565 lm	LRMMR-T*S-L24-DF-I-*
Mounting clip D, F					
Lift parts					
Magnet set A					

Job / Project Name

Area / Location / Circuit No.

Product Code

Qty.

Length (mm)

Luci Pte. Ltd.
Singapore World HQ
Tel: +65-6291-2410

<http://www.luci.co.jp>
Hong Kong Marketing Office
Tel: +852-2219-8462

E-mail: info@luci.co.jp
Korea Office
Tel: +82-2-508-2541

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.
Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115

RIMiT series

Luci RIMiT mr


Luci RIMiT mr (Both ends lead wire, Connector)




Luci Pte., Ltd.

2025.10.08

front view




side view

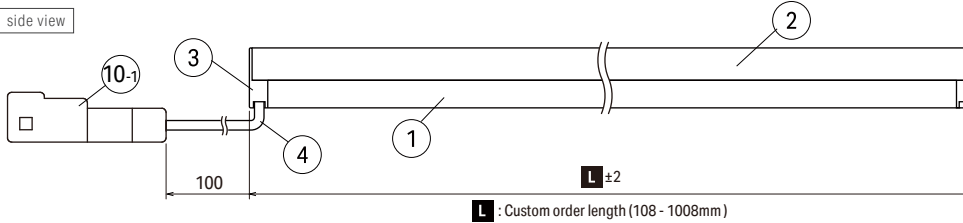


side view




Installation dimensions (Side view)

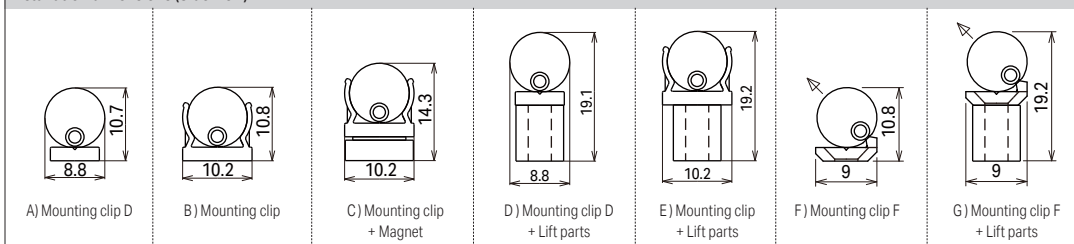

Connector

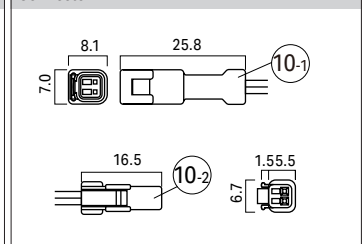

Accessories

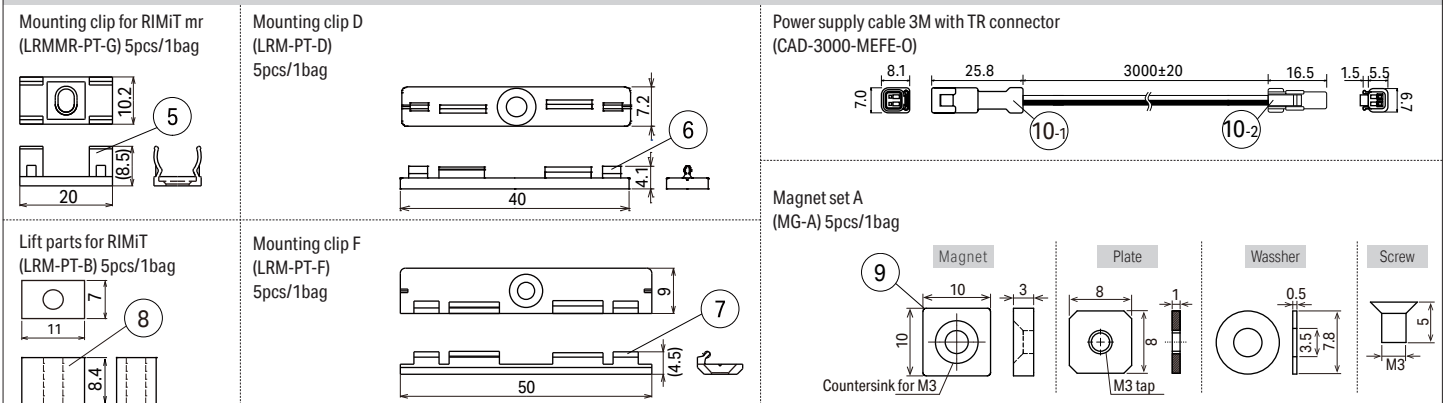

Part Name		Material	Note		Drawing			
1	Body	Aluminum	Alumite treatment, White painting					
2	Cover	Polycarbonate	Diffuser					
3	Side cover	ABS	White					
4	Lead wire		UL1007 AWG26 Black:+ White:-					
5	Mounting clip for RIMiT mr	Polycarbonate	Clear					
6	Mounting clip D	Polycarbonate	Clear					
7	Mounting clip F	Polycarbonate	Clear					
8	Lift parts	Polycarbonate	Clear					
9	Magnet set A	Neogium, Stainless steel	Silver					
10	Connector	Nylon	10-1:SLR-02VF(JST) White, 10-2:SLP-02V(JST) White					
Specifications		Light Source Color	Deliverd CCT	6.4W/m	8.6W/m	Model Number		
Input voltage : DC24V		Natural White	N	4600K	Ra 91	538 lm	692 lm	LRMMR-T*W-N-DF-I-*(C)
Wattage: 6.4W/m, 8.6W/m		White	W	3700K	Ra 92	541 lm	696 lm	LRMMR-T*W-W-DF-I-*(C)
Max. length per curcuit : 3.5m		Warm white	WW	3300K	Ra 92	512 lm	658 lm	LRMMR-T*W-WW-DF-I-*(C)
Weight : 70g (@L1008)		Warm white	L30	2900K	Ra 91	503 lm	648 lm	LRMMR-T*W-L30-DF-I-*(C)
Environment : Indoor (No Condensation)		Warm white	L27	2600K	Ra 92	470 lm	605 lm	LRMMR-T*W-L27-DF-I-**(C)
Accessories : Mounting clip for RIMiT mr		Warm white	L24	2400K	Ra 91	430 lm	565 lm	LRMMR-T*W-L24-DF-I-*(C)
Mounting clip D, F								
Lift parts								
Magnet set A								
Job / Project Name						Area / Location / Circuit No.		
Product Code				Qty.		Length (mm)		
Luci Pte. Ltd.		http://www.luci.co.jp		E-mail: info@luci.co.jp		LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.		
Singapore World HQ		Hong Kong Marketing Office		Korea Office		Shanghai China mainland Regional HQ		
Tel: +65-6291-2410		Tel: +852-2219-8462		Tel: +82-2-508-2541		Tel: +86-21-5238-9115		

RIMiT series

Luci RIMiT mr


Luci RIMiT mr (One end lead wire, Connector)




Luci Pte., Ltd.

2025.10.08

front view




side view

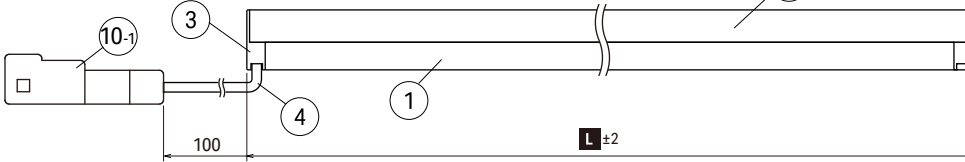


side view









Installation dimensions (Side view)

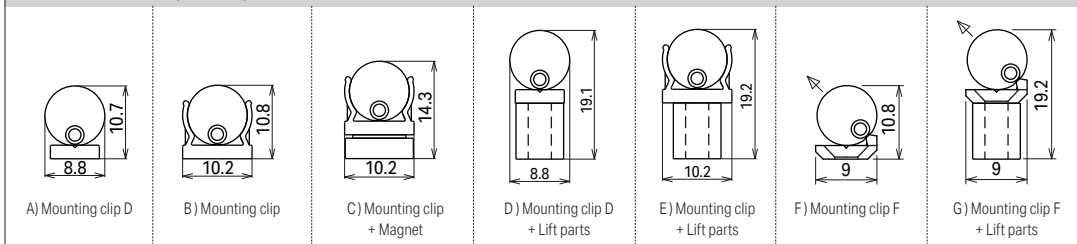

Connector



Accessories

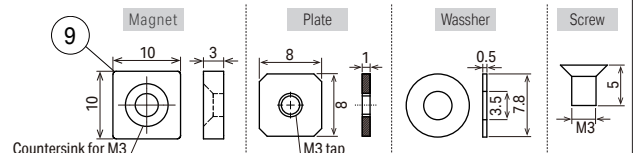Mounting clip for RIMiT mr
(LRMMR-PT-G) 5pcs/1bagMounting clip D
(LRM-PT-D) 5pcs/1bagPower supply cable 3M with TR connector
(CAD-3000-MEFE-0)Lift parts for RIMiT
(LRM-PT-B) 5pcs/1bagMounting clip F
(LRM-PT-F) 5pcs/1bagMagnet set A
(MG-A) 5pcs/1bag

Part Name	Material	Note	Drawing
1 Body	Aluminum	Alumite treatment, White painting	
2 Cover	Polycarbonate	Diffuser	
3 Side cover	ABS	White	
4 Lead wire		UL1007 AWG26 Black:+ White:-	
5 Mounting clip for RIMiT mr	Polycarbonate	Clear	
6 Mounting clip D	Polycarbonate	Clear	
7 Mounting clip F	Polycarbonate	Clear	
8 Lift parts	Polycarbonate	Clear	
9 Magnet set A	Neogium, Stainless steel	Silver	
10 Connector	Nylon	10-1:SLR-02VF(JST) White, 10-2:SLP-02V(JST) White	
Specifications			Model Number
Input voltage:	DC24V	Natural White N 4600K Ra 91 538 lm	
Wattage:	6.4W/m, 8.6W/m	White W 3700K Ra 92 541 lm	
Max. length per circuit:	3.5m	Warm white WW 3300K Ra 92 512 lm	
Weight:	70g (@L1008)	Warm white L30 2900K Ra 91 503 lm	
Environment:	Indoor (No Condensation)	Warm white L27 2600K Ra 92 470 lm	
Accessories:	Mounting clip for RIMiT mr	Warm white L24 2400K Ra 91 430 lm	
	Mounting clip D, F		
	Lift parts		
	Magnet set A		
Job / Project Name			Area / Location / Circuit No.
Product Code			Length (mm)
Qty.			
Luci Pte. Ltd.			LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.
Singapore World HQ			Shanghai China mainland Regional HQ
Tel: +65-6291-2410			Tel: +86-21-5238-9115
http://www.luci.co.jp			
Hong Kong Marketing Office			
Tel: +852-2219-8462			
E-mail: info@luci.co.jp			
Korea Office			
Tel: +82-2-508-2541			

Luci RIMiT mr _ Custom order length

Length	Model No.	Fitting length (mm)	Wattage (W)		Mounting Clip
			6.4W/m	8.6W/m	
0033	LRMMR-T0033*-DF-I*	32.2	0.2	0.2	1 pcs Recommended pitch 60 to 230mm
0058	LRMMR-T0058*-DF-I*	57.2	0.3	0.4	
0083	LRMMR-T0083*-DF-I*	82.2	0.5	0.6	
0108	LRMMR-T0108*-DF-I*	107.2	0.6	0.9	
0133	LRMMR-T0133*-DF-I*	132.2	0.8	1.1	
0158	LRMMR-T0158*-DF-I*	157.2	1.0	1.3	
0183	LRMMR-T0183*-DF-I*	182.2	1.1	1.5	
0208	LRMMR-T0208*-DF-I*	207.2	1.3	1.7	
0233	LRMMR-T0233*-DF-I*	232.2	1.4	1.9	
0258	LRMMR-T0258*-DF-I*	257.2	1.6	2.1	3 pcs Recommended pitch 140 to 370mm
0283	LRMMR-T0283*-DF-I*	282.2	1.8	2.4	
0308	LRMMR-T0308*-DF-I*	307.2	1.9	2.6	
0333	LRMMR-T0333*-DF-I*	332.2	2.1	2.8	
0358	LRMMR-T0358*-DF-I*	357.2	2.2	3.0	
0383	LRMMR-T0383*-DF-I*	382.2	2.4	3.2	
0408	LRMMR-T0408*-DF-I*	407.2	2.6	3.4	
0433	LRMMR-T0433*-DF-I*	432.2	2.7	3.6	
0458	LRMMR-T0458*-DF-I*	457.2	2.9	3.9	
0483	LRMMR-T0483*-DF-I*	482.2	3.0	4.1	
0508	LRMMR-T0508*-DF-I*	507.2	3.2	4.3	
0533	LRMMR-T0533*-DF-I*	532.2	3.4	4.5	
0558	LRMMR-T0558*-DF-I*	557.2	3.5	4.7	
0583	LRMMR-T0583*-DF-I*	582.2	3.7	4.9	
0608	LRMMR-T0608*-DF-I*	607.2	3.8	5.1	
0633	LRMMR-T0633*-DF-I*	632.2	4.0	5.4	
0658	LRMMR-T0658*-DF-I*	657.2	4.2	5.6	
0683	LRMMR-T0683*-DF-I*	682.2	4.3	5.8	
0708	LRMMR-T0708*-DF-I*	707.2	4.5	6.0	4 pcs Recommended pitch 250 to 400mm
0733	LRMMR-T0733*-DF-I*	732.2	4.6	6.2	
0758	LRMMR-T0758*-DF-I*	757.2	4.8	6.4	
0783	LRMMR-T0783*-DF-I*	782.2	5.0	6.6	
0808	LRMMR-T0808*-DF-I*	807.2	5.1	6.8	
0833	LRMMR-T0833*-DF-I*	832.2	5.3	7.1	
0858	LRMMR-T0858*-DF-I*	857.2	5.4	7.3	
0883	LRMMR-T0883*-DF-I*	882.2	5.6	7.5	
0908	LRMMR-T0908*-DF-I*	907.2	5.8	7.7	
0933	LRMMR-T0933*-DF-I*	932.2	5.9	7.9	
0958	LRMMR-T0958*-DF-I*	957.2	6.1	8.1	
0983	LRMMR-T0983*-DF-I*	982.2	6.2	8.3	
1008	LRMMR-T1008*-DF-I*	1007.2	6.4	8.6	
1033	LRMMR-T1033*-DF-I*	1032.2	6.6	8.8	
1058	LRMMR-T1058*-DF-I*	1057.2	6.7	9.0	
1083	LRMMR-T1083*-DF-I*	1082.2	6.9	9.2	
1108	LRMMR-T1108*-DF-I*	1107.2	7.0	9.4	
1133	LRMMR-T1133*-DF-I*	1132.2	7.2	9.6	5 pcs Recommended pitch 315 to 375mm
1158	LRMMR-T1158*-DF-I*	1157.2	7.4	9.8	
1183	LRMMR-T1183*-DF-I*	1182.2	7.5	10.1	
1208	LRMMR-T1208*-DF-I*	1207.2	7.7	10.3	
1233	LRMMR-T1233*-DF-I*	1232.2	7.8	10.5	
1258	LRMMR-T1258*-DF-I*	1257.2	8.0	10.7	
1283	LRMMR-T1283*-DF-I*	1282.2	8.2	10.9	
1308	LRMMR-T1308*-DF-I*	1307.2	8.3	11.1	
1333	LRMMR-T1333*-DF-I*	1332.2	8.5	11.3	
1358	LRMMR-T1358*-DF-I*	1357.2	8.6	11.6	
1383	LRMMR-T1383*-DF-I*	1382.2	8.8	11.8	
1408	LRMMR-T1408*-DF-I*	1407.2	9.0	12.0	
1433	LRMMR-T1433*-DF-I*	1432.2	9.1	12.2	
1458	LRMMR-T1458*-DF-I*	1457.2	9.3	12.4	
1483	LRMMR-T1483*-DF-I*	1482.2	9.4	12.6	
1508	LRMMR-T1508*-DF-I*	1507.2	9.6	12.8	

Accessories

LRMMR-PT-G	Mounting clip for RIMiT mr 5pcs/1bag
LRM-PT-D	Mounting clip D for RIMiT 5pcs/1bag
LRM-PT-F	Mounting clip F for RIMiT 5pcs/1bag
LRM-PT-B	Lift Parts for RIMiT 5pcs/1bag
MG-A	Magnet set A 5pcs/1bag