

RIMiT series

Luci RIMiT sa

Luci RIMiT sa (Both ends lead wire)




Luci Pte., Ltd.

2025.10.08


front view




side view

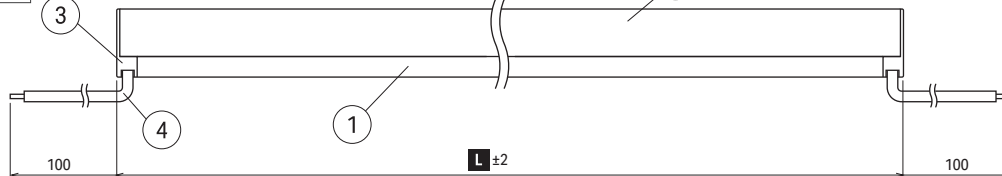


side view

 $L \pm 2$ **L** : Custom order length

Installation dimensions (Side view)

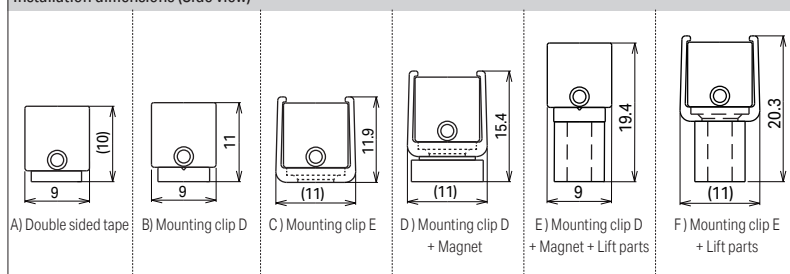

Accessories

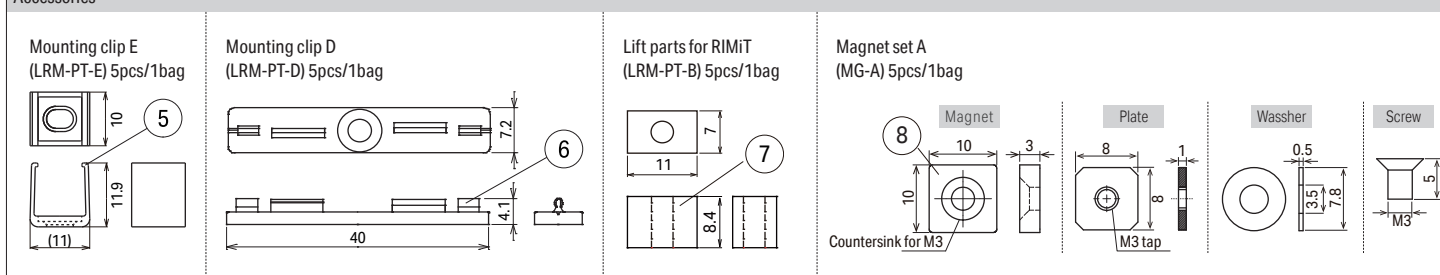


	Part Name	Material	Note	Drawing				
1	Body	Aluminum	Alumite treatment, White painting					
2	Cover	Polycarbonate	Diffuser					
3	Side cover	ABS	White					
4	Lead wire		UL1007 AWG26 Black:+ White:-					
5	Mounting clip E	Polycarbonate	Clear					
6	Mounting clip D	Polycarbonate	Clear					
7	Lift parts	Polycarbonate	Clear					
8	Magnet set A	Neogium, Stainless steel	Silver					
9								
10								
Specifications		Light Source Color	Deliverd CCT	6.4W/m	8.6W/m	Model Number		
Input voltage: DC24V		Natural White	N	4600K	Ra 91	582 lm	690 lm	LRMSA-T*W-N-DF-I-*
Wattage: 6.4W/m, 8.6W/m		White	W	3700K	Ra 91	572 lm	679 lm	LRMSA-T*W-W-DF-I-*
Max. length per curcuit: 3.5m		Warm white	WW	3300K	Ra 92	545 lm	647 lm	LRMSA-T*W-WW-DF-I-*
Weight: 70g (@L1008)		Warm white	L30	2900K	Ra 91	544 lm	645 lm	LRMSA-T*W-L30-DF-I-*
Environment: Indoor (No Condensation)		Warm white	L27	2600K	Ra 91	506 lm	600 lm	LRMSA-T*W-L27-DF-I-*
Accessories: Mounting clip E		Warm white	L24	2400K	Ra 92	473 lm	561 lm	LRMSA-T*W-L24-DF-I-*
Mounting clip D								
Lift parts								
Magnet set A								
Job / Project Name				Area / Location / Circuit No.				
Product Code		Qty.		Length (mm)				
Luci Pte. Ltd.		http://www.luci.co.jp		E-mail: info@luci.co.jp		LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.		
Singapore World HQ		Hong Kong Marketing Office		Korea Office		Shanghai China mainland Regional HQ		
Tel: +65-6291-2410		Tel: +852-2219-8462		Tel: +82-2-508-2541		Tel: +86-21-5238-9115		


front view




side view

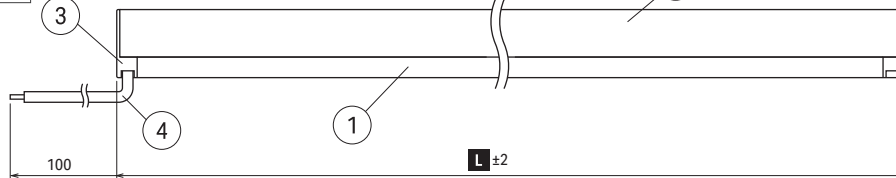**L** : Custom order length


side view




Installation dimensions (Side view)

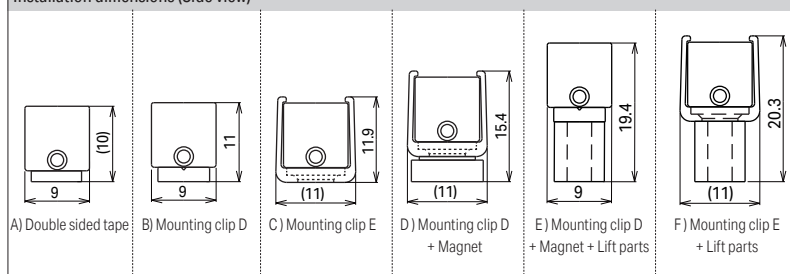

Accessories

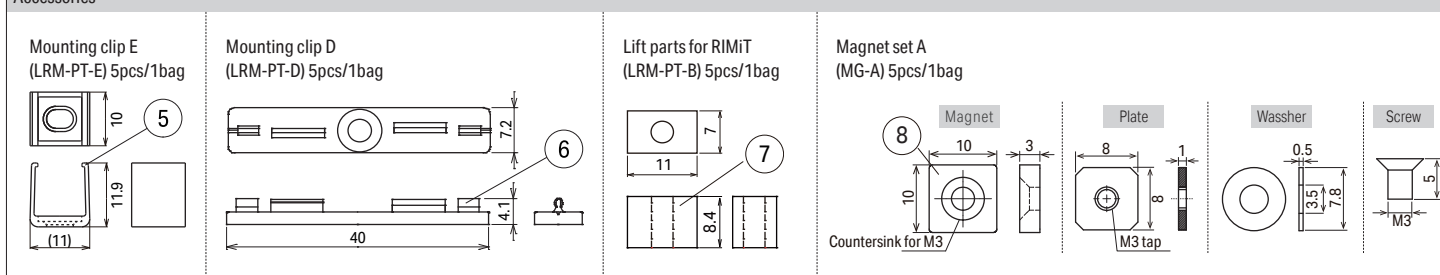

	Part Name	Material	Note	Drawing
1	Body	Aluminum	Alumite treatment, White painting	
2	Cover	Polycarbonate	Diffuser	
3	Side cover	ABS	White	
4	Lead wire		UL1007 AWG26 Black:+ White:-	
5	Mounting clip E	Polycarbonate	Clear	
6	Mounting clip D	Polycarbonate	Clear	
7	Lift parts	Polycarbonate	Clear	
8	Magnet set A	Neogium, Stainless steel	Silver	
9				
10				

Specifications	Light Source Color		Deliverd CCT	6.4W/m		8.6W/m	Model Number
Input voltage: DC24V	Natural White	N	4600K	Ra 91	582 lm	690 lm	
Wattage: 6.4W/m, 8.6W/m	White	W	3700K	Ra 91	572 lm	679 lm	
Max. length per curcuit: 3.5m	Warm white	WW	3300K	Ra 92	545 lm	647 lm	
Weight: 70g (@L1008)	Warm white	L30	2900K	Ra 91	544 lm	645 lm	
Environment: Indoor (No Condensation)	Warm white	L27	2600K	Ra 91	506 lm	600 lm	
Accessories: Mounting clip E	Warm white	L24	2400K	Ra 92	473 lm	561 lm	
Mounting clip D							
Lift parts							
Magnet set A							

Job / Project Name

Area / Location / Circuit No.

Product Code

Qty.

Length (mm)

Luci Pte. Ltd.
Singapore World HQ
Tel: +65-6291-2410

<http://www.luci.co.jp>
Hong Kong Marketing Office
Tel: +852-2219-8462

E-mail: info@luci.co.jp
Korea Office
Tel: +82-2-508-2541

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.
Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115

RIMiT series

Luci RIMiT sa


Luci RIMiT sa (Both ends lead wire, Connector)




Luci Pte., Ltd.

2025.10.08


front view




side view

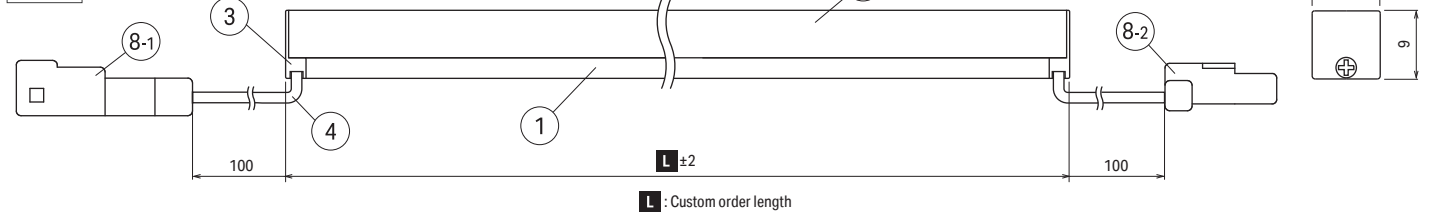






Installation dimensions (Side view)

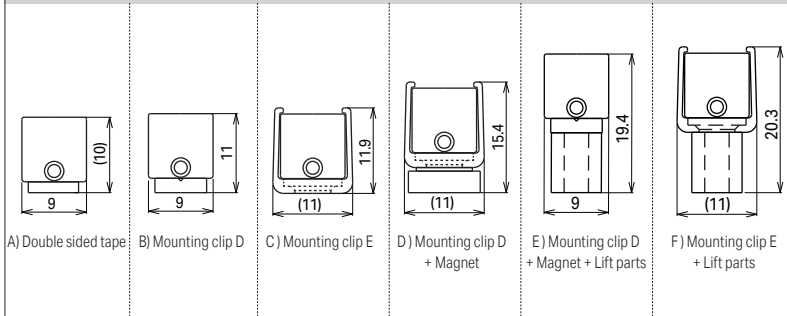


Connector



Accessories

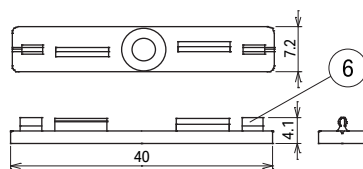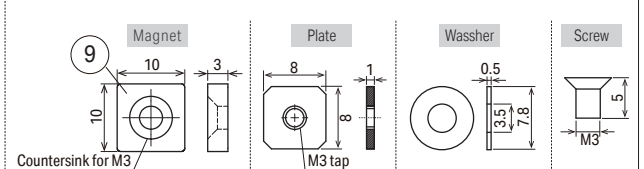Cable 5M TR Connector
(CAD-5000-MEFE-O)Mounting clip E
(LRM-PT-E) 5pcs/1bagMounting clip D
(LRM-PT-D) 5pcs/1bagLift parts for RIMiT
(LRM-PT-B) 5pcs/1bagMagnet set A
(MG-A) 5pcs/1bag

Part Name		Material	Note					
1	Body	Aluminum	Alumite treatment, White painting					
2	Cover	Polycarbonate	Diffuser					
3	Side cover	ABS	White					
4	Lead wire		UL1007 AWG26 Black:+ White:-					
5	Mounting clip E	Polycarbonate	Clear					
6	Mounting clip D	Polycarbonate	Clear					
7	Lift parts	Polycarbonate	Clear					
8	Connector	Nylon	8-1:SLR-02VF(JST) White, 8-2:SLP-02V(JST) White					
9	Magnet set A	Neogium, Stainless steel	Silver					
10								
Specifications		Light Source Color	Deliverd CCT	6.4W/m	8.6W/m	Model Number		
Input voltage : DC24V		Natural White	N	4600K	Ra 91	582 lm	690 lm	LRMSA-T*W-N-DF-I-*(C)
Wattage: 6.4W/m, 8.6W/m		White	W	3700K	Ra 91	572 lm	679 lm	LRMSA-T*W-W-DF-I-*(C)
Max. length per curcuit : 3.5m		Warm white	WW	3300K	Ra 92	545 lm	647 lm	LRMSA-T*W-WW-DF-I-*(C)
Weight : 70g (@L1008)		Warm white	L30	2900K	Ra 91	544 lm	645 lm	LRMSA-T*W-L30-DF-I-*(C)
Environment : Indoor (No Condensation)		Warm white	L27	2600K	Ra 91	506 lm	600 lm	LRMSA-T*W-L27-DF-I-**(C)
Accessories : Mounting clip E		Warm white	L24	2400K	Ra 92	473 lm	561 lm	LRMSA-T*W-L24-DF-I-*(C)
Mounting clip D								
Lift parts								
Magnet set A								
Job / Project Name							Area / Location / Circuit No.	
Product Code				Qty.		Length (mm)		
Luci Pte. Ltd.		http://www.luci.co.jp		E-mail: info@luci.co.jp		LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.		
Singapore World HQ		Hong Kong Marketing Office		Korea Office		Shanghai China mainland Regional HQ		
Tel: +65-6291-2410		Tel: +852-2219-8462		Tel: +82-2-508-2541		Tel: +86-21-5238-9115		

RIMiT series

Luci RIMiT sa

Luci RIMiT sa (One end lead wire, Connector)

Luci Pte., Ltd.


2025.10.08




front view




side view

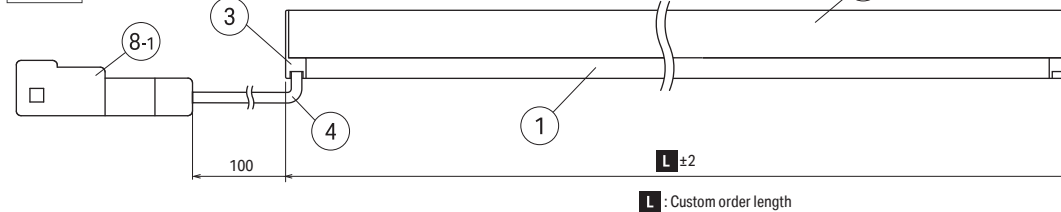


side view








Installation dimensions (Side view)

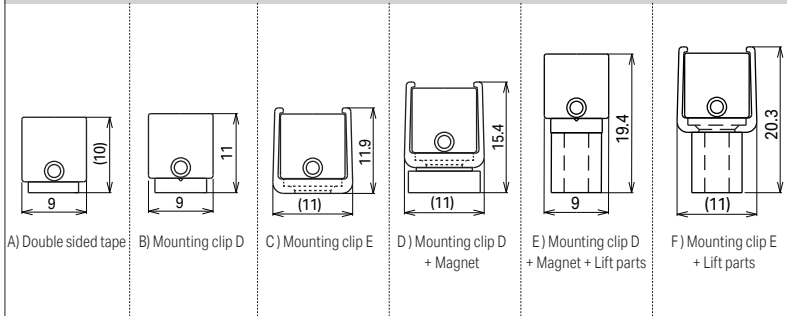

Connector



Accessories

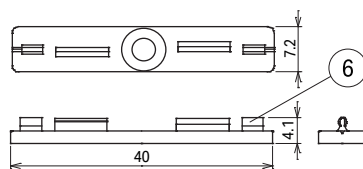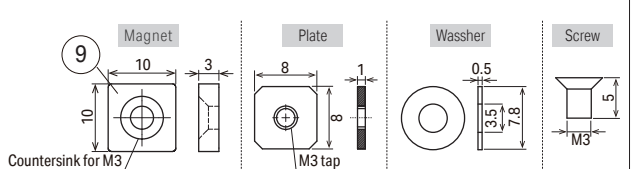Cable 5M TR Connector
(CAD-5000-MEFE-O)Mounting clip E
(LRM-PT-E) 5pcs/1bagMounting clip D
(LRM-PT-D) 5pcs/1bagLift parts for RIMiT
(LRM-PT-B) 5pcs/1bagMagnet set A
(MG-A) 5pcs/1bag

Part Name		Material	Note	Drawing				
1	Body	Aluminum	Alumite treatment, White painting					
2	Cover	Polycarbonate	Diffuser					
3	Side cover	ABS	White					
4	Lead wire		UL1007 AWG26 Black:+ White:-					
5	Mounting clip E	Polycarbonate	Clear					
6	Mounting clip D	Polycarbonate	Clear					
7	Lift parts	Polycarbonate	Clear					
8	Connector	Nylon	8-1:SLR-02VF(JST) White, 8-2:SLP-02V(JST) White					
9	Magnet set A	Neogium, Stainless steel	Silver					
10								
Specifications		Light Source Color	Deliverd CCT	6.4W/m	8.6W/m	Model Number		
Input voltage : DC24V		Natural White	N	4600K	Ra 91	582 lm	690 lm	LRMSA-T*S-N-DF-I-*(C)
Wattage: 6.4W/m, 8.6W/m		White	W	3700K	Ra 91	572 lm	679 lm	LRMSA-T*S-W-DF-I-*(C)
Max. length per curcuit : 3.5m		Warm white	WW	3300K	Ra 92	545 lm	647 lm	LRMSA-T*S-WW-DF-I-*(C)
Weight : 70g (@L1008)		Warm white	L30	2900K	Ra 91	544 lm	645 lm	LRMSA-T*S-L30-DF-I-*(C)
Environment : Indoor (No Condensation)		Warm white	L27	2600K	Ra 91	506 lm	600 lm	LRMSA-T*S-L27-DF-I-*(C)
Accessories : Mounting clip E		Warm white	L24	2400K	Ra 92	473 lm	561 lm	LRMSA-T*S-L24-DF-I-*(C)
Mounting clip D								
Lift parts								
Magnet set A								
Job / Project Name						Area / Location / Circuit No.		
Product Code			Qty.	Length (mm)				
Luci Pte. Ltd.		http://www.luci.co.jp		E-mail: info@luci.co.jp		LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.		
Singapore World HQ		Hong Kong Marketing Office		Korea Office		Shanghai China mainland Regional HQ		
Tel: +65-6291-2410		Tel: +852-2219-8462		Tel: +82-2-508-2541		Tel: +86-21-5238-9115		

Luci RIMiT sa _ Custom order length

Length	Model No.	Fitting length (mm)	Wattage (W)		Mounting Clip
			6.4W/m	8.6W/m	
0033	LRMSA-T0033*.*-DF-I*.	32.2	0.2	0.2	1 pcs Recommended pitch 60 to 230mm
0058	LRMSA-T0058*.*-DF-I*.	57.2	0.3	0.4	
0083	LRMSA-T0083*.*-DF-I*.	82.2	0.5	0.6	
0108	LRMSA-T0108*.*-DF-I*.	107.2	0.6	0.9	
0133	LRMSA-T0133*.*-DF-I*.	132.2	0.8	1.1	
0158	LRMSA-T0158*.*-DF-I*.	157.2	1.0	1.3	
0183	LRMSA-T0183*.*-DF-I*.	182.2	1.1	1.5	
0208	LRMSA-T0208*.*-DF-I*.	207.2	1.3	1.7	
0233	LRMSA-T0233*.*-DF-I*.	232.2	1.4	1.9	
0258	LRMSA-T0258*.*-DF-I*.	257.2	1.6	2.1	
0283	LRMSA-T0283*.*-DF-I*.	282.2	1.8	2.4	3 pcs Recommended pitch 140 to 370mm
0308	LRMSA-T0308*.*-DF-I*.	307.2	1.9	2.6	
0333	LRMSA-T0333*.*-DF-I*.	332.2	2.1	2.8	
0358	LRMSA-T0358*.*-DF-I*.	357.2	2.2	3.0	
0383	LRMSA-T0383*.*-DF-I*.	382.2	2.4	3.2	
0408	LRMSA-T0408*.*-DF-I*.	407.2	2.6	3.4	
0433	LRMSA-T0433*.*-DF-I*.	432.2	2.7	3.6	
0458	LRMSA-T0458*.*-DF-I*.	457.2	2.9	3.9	
0483	LRMSA-T0483*.*-DF-I*.	482.2	3.0	4.1	
0508	LRMSA-T0508*.*-DF-I*.	507.2	3.2	4.3	
0533	LRMSA-T0533*.*-DF-I*.	532.2	3.4	4.5	
0558	LRMSA-T0558*.*-DF-I*.	557.2	3.5	4.7	
0583	LRMSA-T0583*.*-DF-I*.	582.2	3.7	4.9	
0608	LRMSA-T0608*.*-DF-I*.	607.2	3.8	5.1	
0633	LRMSA-T0633*.*-DF-I*.	632.2	4.0	5.4	
0658	LRMSA-T0658*.*-DF-I*.	657.2	4.2	5.6	
0683	LRMSA-T0683*.*-DF-I*.	682.2	4.3	5.8	
0708	LRMSA-T0708*.*-DF-I*.	707.2	4.5	6.0	
0733	LRMSA-T0733*.*-DF-I*.	732.2	4.6	6.2	
0758	LRMSA-T0758*.*-DF-I*.	757.2	4.8	6.4	
0783	LRMSA-T0783*.*-DF-I*.	782.2	5.0	6.6	4 pcs Recommended pitch 250 to 400mm
0808	LRMSA-T0808*.*-DF-I*.	807.2	5.1	6.8	
0833	LRMSA-T0833*.*-DF-I*.	832.2	5.3	7.1	
0858	LRMSA-T0858*.*-DF-I*.	857.2	5.4	7.3	
0883	LRMSA-T0883*.*-DF-I*.	882.2	5.6	7.5	
0908	LRMSA-T0908*.*-DF-I*.	907.2	5.8	7.7	
0933	LRMSA-T0933*.*-DF-I*.	932.2	5.9	7.9	
0958	LRMSA-T0958*.*-DF-I*.	957.2	6.1	8.1	
0983	LRMSA-T0983*.*-DF-I*.	982.2	6.2	8.3	
1008	LRMSA-T1008*.*-DF-I*.	1007.2	6.4	8.6	
1033	LRMSA-T1033*.*-DF-I*.	1032.2	6.6	8.8	
1058	LRMSA-T1058*.*-DF-I*.	1057.2	6.7	9.0	
1083	LRMSA-T1083*.*-DF-I*.	1082.2	6.9	9.2	
1108	LRMSA-T1108*.*-DF-I*.	1107.2	7.0	9.4	
1133	LRMSA-T1133*.*-DF-I*.	1132.2	7.2	9.6	
1158	LRMSA-T1158*.*-DF-I*.	1157.2	7.4	9.8	
1183	LRMSA-T1183*.*-DF-I*.	1182.2	7.5	10.1	
1208	LRMSA-T1208*.*-DF-I*.	1207.2	7.7	10.3	
1233	LRMSA-T1233*.*-DF-I*.	1232.2	7.8	10.5	
1258	LRMSA-T1258*.*-DF-I*.	1257.2	8.0	10.7	
1283	LRMSA-T1283*.*-DF-I*.	1282.2	8.2	10.9	5 pcs Recommended pitch 315 to 375mm
1308	LRMSA-T1308*.*-DF-I*.	1307.2	8.3	11.1	
1333	LRMSA-T1333*.*-DF-I*.	1332.2	8.5	11.3	
1358	LRMSA-T1358*.*-DF-I*.	1357.2	8.6	11.6	
1383	LRMSA-T1383*.*-DF-I*.	1382.2	8.8	11.8	
1408	LRMSA-T1408*.*-DF-I*.	1407.2	9.0	12.0	
1433	LRMSA-T1433*.*-DF-I*.	1432.2	9.1	12.2	
1458	LRMSA-T1458*.*-DF-I*.	1457.2	9.3	12.4	
1483	LRMSA-T1483*.*-DF-I*.	1482.2	9.4	12.6	
1508	LRMSA-T1508*.*-DF-I*.	1507.2	9.6	12.8	

Accessories

LRM-PT-E	Mounting clip E for RIMiT 5pcs/1bag
MG-A	Magnet set A 5pcs/1bag
LRM-PT-D	Mounting clip D for RIMiT 5pcs/1bag
LRM-PT-B	Lift Parts for RIMiT 5pcs/1bag