

RIMiT series

Luci RIMiT sk


Luci RIMiT sk (Both ends lead wire)



Luci Pte., Ltd.


2025.10.08

front view

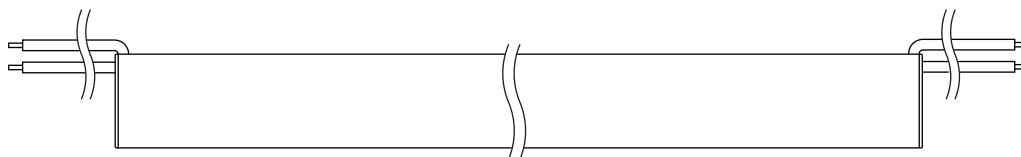


side view


side view

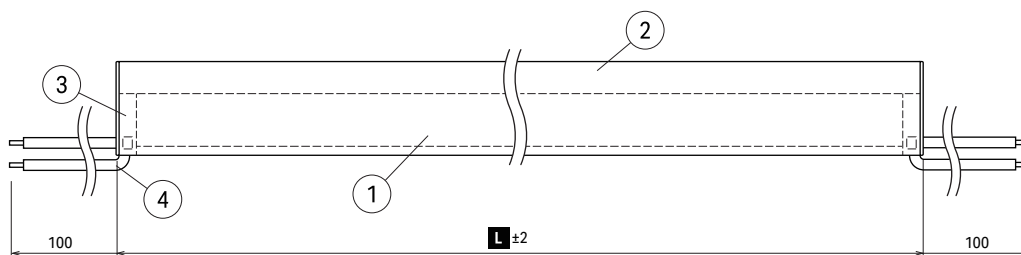


L : Custom order length



Installation dimensions (Side view)

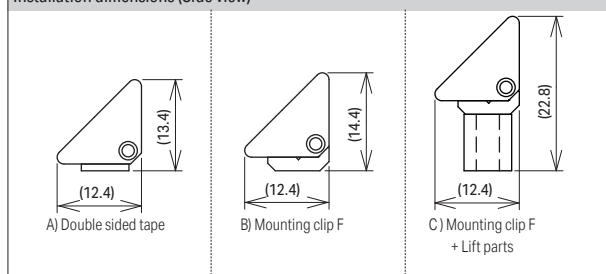

Accessories

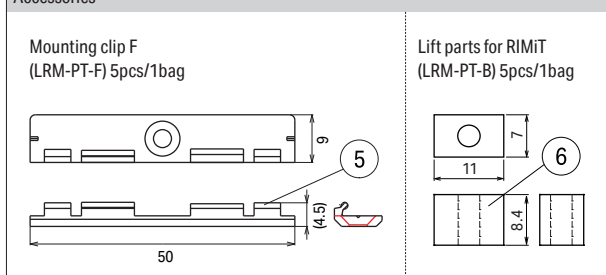

	Part Name	Material	Note	Drawing
1	Body	Aluminum	Alumite treatment, White painting	
2	Cover	Polycarbonate	Diffuser	
3	Side cover	ABS	White	
4	Lead wire		UL1007 AWG26 Black:+ White:-	
5	Mounting clip F	Polycarbonate	Clear	
6	Lift parts	Polycarbonate	Clear	
7				
8				
9				
10				

Specifications	Light Source Color	Delivered CCT	6.4W/m	8.6W/m	Model Number
Input voltage: DC24V	Natural White N	4600K Ra 91	543 lm	700 lm	LRMSK-T*W-N-DF-I-*
Wattage: 6.4W/m, 8.6W/m	White W	3700K Ra 91	543 lm	700 lm	LRMSK-T*W-W-DF-I-*
Max. length per circuit: 3.5m	Warm white WW	3300K Ra 92	522 lm	673 lm	LRMSK-T*W-WW-DF-I-*
Weight: 70g (@L1008)	Warm white L30	2900K Ra 91	494 lm	636 lm	LRMSK-T*W-L30-DF-I-*
Environment: Indoor (No Condensation)	Warm white L27	2600K Ra 91	510 lm	658 lm	LRMSK-T*W-L27-DF-I-*
Accessories: Mounting clip F	Warm white L24	2400K Ra 92	450 lm	579 lm	LRMSK-T*W-L24-DF-I-*
Lift parts					

Job / Project Name

Area / Location / Circuit No.

Product Code

Qty.

Length (mm)

Luci Pte. Ltd.

Singapore World HQ

Tel: +65-6291-2410

http://www.luci.co.jp

Hong Kong Marketing Office

Tel: +852-2219-8462

E-mail: info@luci.co.jp

Korea Office


Tel: +82-2-508-2541

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.


Shanghai China mainland Regional HQ

Tel: +86-21-5238-9115

front view

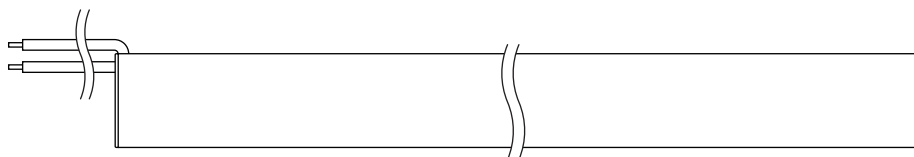


side view

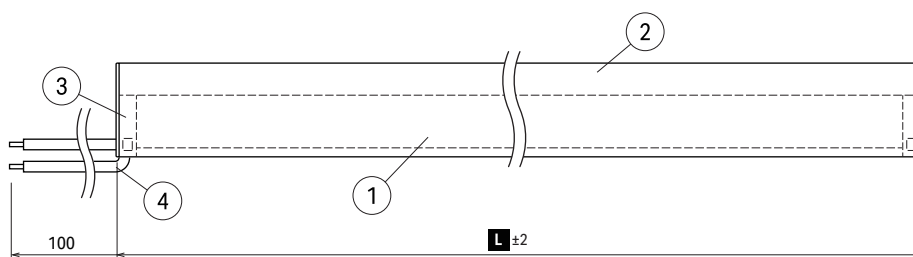


L : Custom order length


side view




Installation dimensions (Side view)

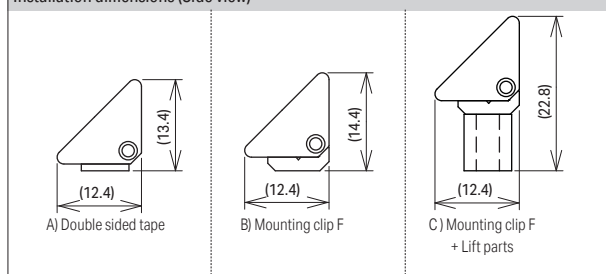

Accessories

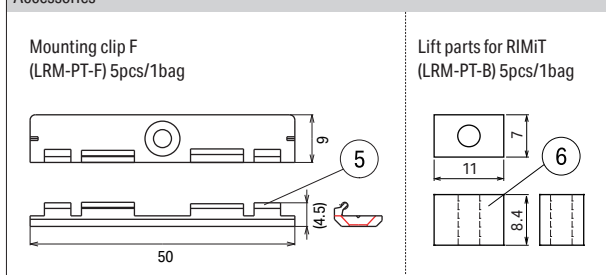

	Part Name	Material	Note	Drawing
1	Body	Aluminum	Alumite treatment, White painting	
2	Cover	Polycarbonate	Diffuser	
3	Side cover	ABS	White	
4	Lead wire		UL1007 AWG26 Black:+ White:-	
5	Mounting clip F	Polycarbonate	Clear	
6	Lift parts	Polycarbonate	Clear	
7				
8				
9				
10				

Specifications	Light Source Color	Deliverd CCT	6.4W/m	8.6W/m	Model Number
Input voltage: DC24V	Natural White N	4600K Ra 91	543 lm	700 lm	LRMSK-T*S-N-DF-I-*
Wattage: 6.4W/m, 8.6W/m	White W	3700K Ra 91	543 lm	700 lm	LRMSK-T*S-W-DF-I-*
Max. length per curcuit: 3.5m	Warm white WW	3300K Ra 92	522 lm	673 lm	LRMSK-T*S-WW-DF-I-*
Weight: 70g (@L1008)	Warm white L30	2900K Ra 91	494 lm	636 lm	LRMSK-T*S-L30-DF-I-*
Environment: Indoor (No Condensation)	Warm white L27	2600K Ra 91	510 lm	658 lm	LRMSK-T*S-L27-DF-I-*
Accessories: Mounting clip F	Warm white L24	2400K Ra 92	450 lm	579 lm	LRMSK-T*S-L24-DF-I-*
Lift parts					

Job / Project Name

Area / Location / Circuit No.

Product Code

Qty.

Length (mm)

Luci Pte. Ltd.

Singapore World HQ

Tel: +65-6291-2410

http://www.luci.co.jp

Hong Kong Marketing Office

Tel: +852-2219-8462

E-mail: info@luci.co.jp

Korea Office

Tel: +82-2-508-2541

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Shanghai China mainland Regional HQ

Tel: +86-21-5238-9115

RIMiT series


Luci RIMiT sk

Luci RIMiT sk (Both ends lead wire, Connector)




Luci Pte., Ltd.

2025.10.08

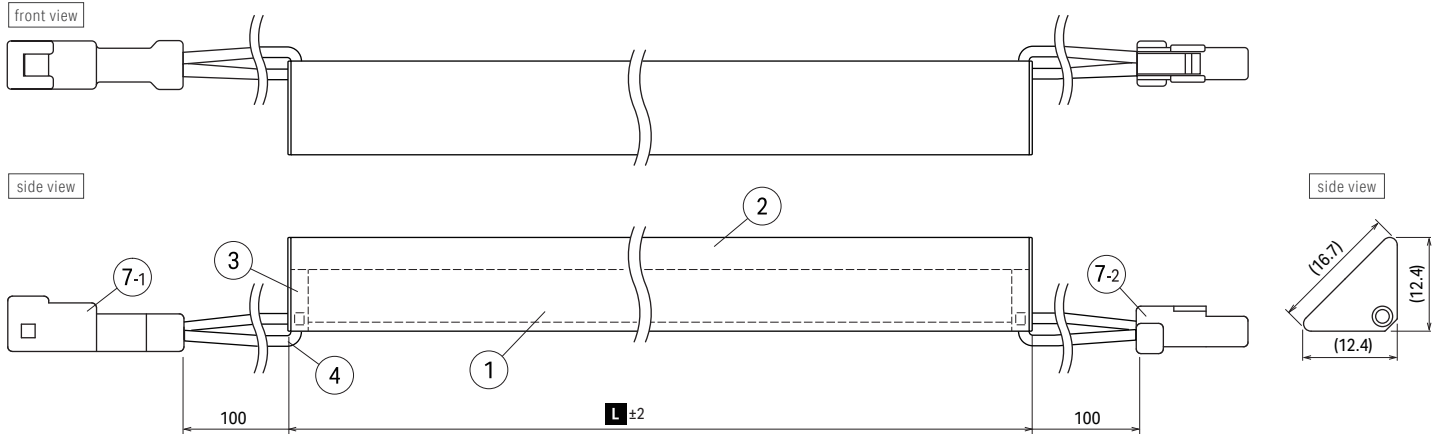


L : Custom order length




Installation dimensions (Side view)

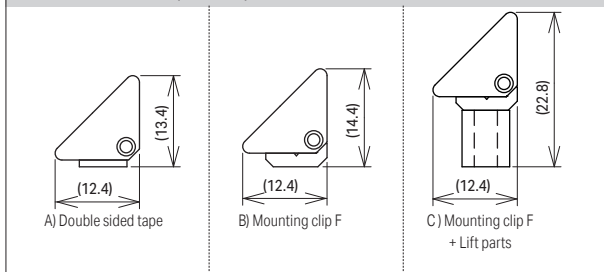

Connector



Accessories

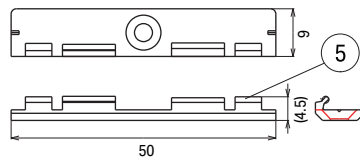Mounting clip F
(LRM-PT-F) 5pcs/1bagLift parts for RIMiT
(LRM-PT-B) 5pcs/1bagCable 5M TR Connector
(CAD-5000-MEFE-O)

	Part Name	Material	Note	Drawing
1	Body	Aluminum	Alumite treatment, White painting	
2	Cover	Polycarbonate	Diffuser	
3	Side cover	ABS	White	
4	Lead wire		UL1007 AWG26 Black:+ White:-	
5	Mounting clip F	Polycarbonate	Clear	
6	Lift parts	Polycarbonate	Clear	
7	Connector	Nylon	UL94V-0, White	
8				
9				
10				

Specifications	Light Source Color	Deliverd CCT	6.4W/m	8.6W/m	Model Number	
Input voltage: DC24V	Natural White N	4600K	Ra 91	543 lm	700 lm	LRMSK-T*W-N-DF-I-*(C)
Wattage: 6.4W/m, 8.6W/m	White W	3700K	Ra 91	543 lm	700 lm	LRMSK-T*W-W-DF-I-*(C)
Max. length per circuit: 3.5m	Warm white WW	3300K	Ra 92	522 lm	673 lm	LRMSK-T*W-WW-DF-I-*(C)
Weight: 70g @L1008	Warm white L30	2900K	Ra 91	494 lm	636 lm	LRMSK-T*W-L30-DF-I-*(C)
Environment: Indoor (No Condensation)	Warm white L27	2600K	Ra 91	510 lm	658 lm	LRMSK-T*W-L27-DF-I-*(C)
Accessories: Mounting clip F	Warm white L24	2400K	Ra 92	450 lm	579 lm	LRMSK-T*W-L24-DF-I-*(C)
Lift parts						

Job / Project Name

Area / Location / Circuit No.

Product Code

Qty.

Length (mm)

Luci Pte. Ltd.
Singapore World HQ
Tel: +65-6291-2410

<http://www.luci.co.jp>
Hong Kong Marketing Office
Tel: +852-2219-8462

E-mail: info@luci.co.jp
Korea Office
Tel: +82-2-508-2541

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.
Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115

RIMiT series

Luci RIMiT sk


Luci RIMiT sk (One end lead wire, Connector)




Luci Pte., Ltd.

2025.10.08


front view

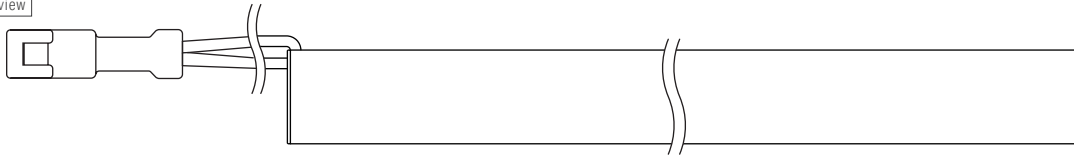

side view


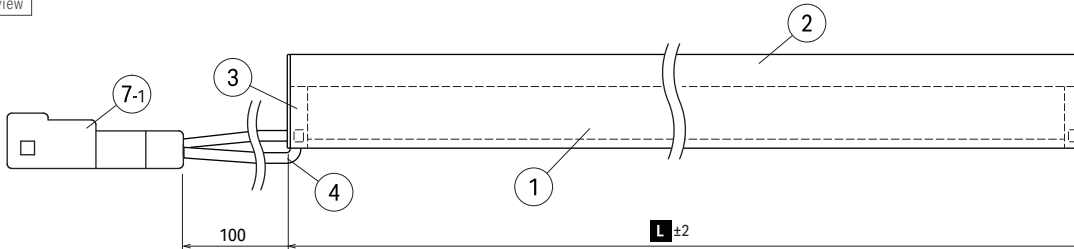


side view






Installation dimensions (Side view)

Connector

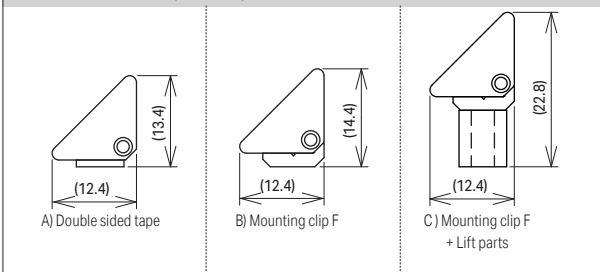

Accessories

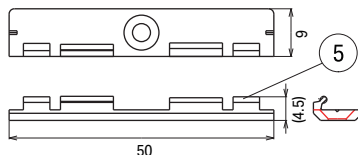Mounting clip F
(LRM-PT-F) 5pcs/1bagLift parts for RIMiT
(LRM-PT-B) 5pcs/1bagCable 5M TR Connector
(CAD-5000-MEFE-O)

	Part Name	Material	Note	Drawing
1	Body	Aluminum	Alumite treatment, White painting	
2	Cover	Polycarbonate	Diffuser	
3	Side cover	ABS	White	
4	Lead wire		UL1007 AWG26 Black:+ White:-	
5	Mounting clip F	Polycarbonate	Clear	
6	Lift parts	Polycarbonate	Clear	
7	Connector	Nylon	UL94V-0, White	
8				
9				
10				

Specifications	Light Source Color	Delivered CCT	6.4W/m	8.6W/m	Model Number	
Input voltage: DC24V	Natural White N	4600K	Ra 91	543 lm	700 lm	LRMSK-T*S-N-DF-I-*(C)
Wattage: 6.4W/m, 8.6W/m	White W	3700K	Ra 91	543 lm	700 lm	LRMSK-T*S-W-DF-I-*(C)
Max. length per circuit: 3.5m	Warm white WW	3300K	Ra 92	522 lm	673 lm	LRMSK-T*S-WW-DF-I-*(C)
Weight: 70g @L1008	Warm white L30	2900K	Ra 91	494 lm	636 lm	LRMSK-T*S-L30-DF-I-*(C)
Environment: Indoor (No Condensation)	Warm white L27	2600K	Ra 91	510 lm	658 lm	LRMSK-T*S-L27-DF-I-*(C)
Accessories: Mounting clip F	Warm white L24	2400K	Ra 92	450 lm	579 lm	LRMSK-T*S-L24-DF-I-*(C)
Lift parts						

Job / Project Name

Area / Location / Circuit No.

Product Code

Qty.

Length (mm)

Luci Pte. Ltd.
Singapore World HQ
Tel: +65-6291-2410

<http://www.luci.co.jp>
Hong Kong Marketing Office
Tel: +852-2219-8462

E-mail: info@luci.co.jp
Korea Office
Tel: +82-2-508-2541

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.
Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115

Luci RIMiT sk _ Custom order length

Length	Model No.	Fitting length (mm)	Wattage (W)		Mounting Clip
			6.4W/m	8.6W/m	
0033	LRMSK-T0033*-*-DF-I-*	32.2	0.2	0.2	1 pcs Recommended pitch 60 to 230mm
0058	LRMSK-T0058*-*-DF-I-*	57.2	0.3	0.4	
0083	LRMSK-T0083*-*-DF-I-*	82.2	0.5	0.6	
0108	LRMSK-T0108*-*-DF-I-*	107.2	0.6	0.9	
0133	LRMSK-T0133*-*-DF-I-*	132.2	0.8	1.1	
0158	LRMSK-T0158*-*-DF-I-*	157.2	1.0	1.3	
0183	LRMSK-T0183*-*-DF-I-*	182.2	1.1	1.5	
0208	LRMSK-T0208*-*-DF-I-*	207.2	1.3	1.7	
0233	LRMSK-T0233*-*-DF-I-*	232.2	1.4	1.9	
0258	LRMSK-T0258*-*-DF-I-*	257.2	1.6	2.1	3 pcs Recommended pitch 140 to 370mm
0283	LRMSK-T0283*-*-DF-I-*	282.2	1.8	2.4	
0308	LRMSK-T0308*-*-DF-I-*	307.2	1.9	2.6	
0333	LRMSK-T0333*-*-DF-I-*	332.2	2.1	2.8	
0358	LRMSK-T0358*-*-DF-I-*	357.2	2.2	3.0	
0383	LRMSK-T0383*-*-DF-I-*	382.2	2.4	3.2	
0408	LRMSK-T0408*-*-DF-I-*	407.2	2.6	3.4	
0433	LRMSK-T0433*-*-DF-I-*	432.2	2.7	3.6	
0458	LRMSK-T0458*-*-DF-I-*	457.2	2.9	3.9	
0483	LRMSK-T0483*-*-DF-I-*	482.2	3.0	4.1	4 pcs Recommended pitch 250 to 400mm
0508	LRMSK-T0508*-*-DF-I-*	507.2	3.2	4.3	
0533	LRMSK-T0533*-*-DF-I-*	532.2	3.4	4.5	
0558	LRMSK-T0558*-*-DF-I-*	557.2	3.5	4.7	
0583	LRMSK-T0583*-*-DF-I-*	582.2	3.7	4.9	
0608	LRMSK-T0608*-*-DF-I-*	607.2	3.8	5.1	
0633	LRMSK-T0633*-*-DF-I-*	632.2	4.0	5.4	
0658	LRMSK-T0658*-*-DF-I-*	657.2	4.2	5.6	
0683	LRMSK-T0683*-*-DF-I-*	682.2	4.3	5.8	
0708	LRMSK-T0708*-*-DF-I-*	707.2	4.5	6.0	5 pcs Recommended pitch 315 to 375mm
0733	LRMSK-T0733*-*-DF-I-*	732.2	4.6	6.2	
0758	LRMSK-T0758*-*-DF-I-*	757.2	4.8	6.4	
0783	LRMSK-T0783*-*-DF-I-*	782.2	5.0	6.6	
0808	LRMSK-T0808*-*-DF-I-*	807.2	5.1	6.8	
0833	LRMSK-T0833*-*-DF-I-*	832.2	5.3	7.1	
0858	LRMSK-T0858*-*-DF-I-*	857.2	5.4	7.3	
0883	LRMSK-T0883*-*-DF-I-*	882.2	5.6	7.5	
0908	LRMSK-T0908*-*-DF-I-*	907.2	5.8	7.7	
0933	LRMSK-T0933*-*-DF-I-*	932.2	5.9	7.9	
0958	LRMSK-T0958*-*-DF-I-*	957.2	6.1	8.1	
0983	LRMSK-T0983*-*-DF-I-*	982.2	6.2	8.3	
1008	LRMSK-T1008*-*-DF-I-*	1007.2	6.4	8.6	
1033	LRMSK-T1033*-*-DF-I-*	1032.2	6.6	8.8	
1058	LRMSK-T1058*-*-DF-I-*	1057.2	6.7	9.0	
1083	LRMSK-T1083*-*-DF-I-*	1082.2	6.9	9.2	
1108	LRMSK-T1108*-*-DF-I-*	1107.2	7.0	9.4	
1133	LRMSK-T1133*-*-DF-I-*	1132.2	7.2	9.6	
1158	LRMSK-T1158*-*-DF-I-*	1157.2	7.4	9.8	
1183	LRMSK-T1183*-*-DF-I-*	1182.2	7.5	10.1	
1208	LRMSK-T1208*-*-DF-I-*	1207.2	7.7	10.3	
1233	LRMSK-T1233*-*-DF-I-*	1232.2	7.8	10.5	
1258	LRMSK-T1258*-*-DF-I-*	1257.2	8.0	10.7	
1283	LRMSK-T1283*-*-DF-I-*	1282.2	8.2	10.9	
1308	LRMSK-T1308*-*-DF-I-*	1307.2	8.3	11.1	
1333	LRMSK-T1333*-*-DF-I-*	1332.2	8.5	11.3	
1358	LRMSK-T1358*-*-DF-I-*	1357.2	8.6	11.6	
1383	LRMSK-T1383*-*-DF-I-*	1382.2	8.8	11.8	
1408	LRMSK-T1408*-*-DF-I-*	1407.2	9.0	12.0	
1433	LRMSK-T1433*-*-DF-I-*	1432.2	9.1	12.2	
1458	LRMSK-T1458*-*-DF-I-*	1457.2	9.3	12.4	
1483	LRMSK-T1483*-*-DF-I-*	1482.2	9.4	12.6	
1508	LRMSK-T1508*-*-DF-I-*	1507.2	9.6	12.8	

Accessories

LRM-PT-F	Mounting clip F for RIMiT 5pcs/1bag
LRM-PT-B	Lift Parts for RIMiT 5pcs/1bag