


front view



side view

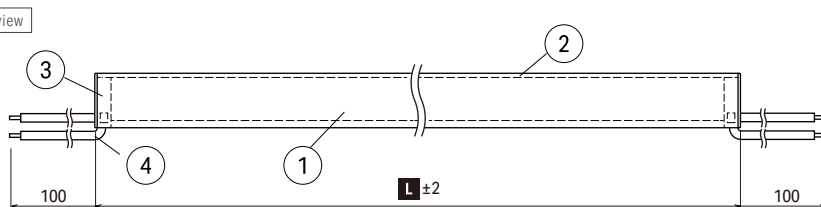


L : Custom order length (108 - 1008mm)


side view






Installation dimensions (Side view)







A) Mounting clip F




B) Mounting clip E

C) Mounting clip E
+ MagnetD) Mounting clip F
+ Lift partsF) Mounting clip E
+ Lift parts

Accessories

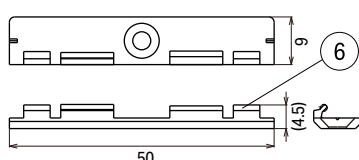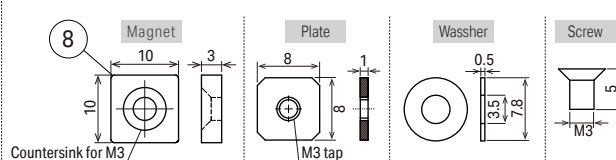
Mounting clip E
(LRM-PT-E) 5pcs/1bagMounting clip F
(LRM-PT-F) 5pcs/1bagLift parts for RIMiT
(LRM-PT-B) 5pcs/1bagMagnet set A
(MG-A) 5pcs/1bag

Part Name		Material	Note	Drawing				
1	Body	Aluminum	Alumite treatment, White painting					
2	Cover	Polycarbonate	Diffuser					
3	Side cover	ABS	White					
4	Lead wire		UL1007 AWG26 Black:+ White:-					
5	Mounting clip E	Polycarbonate	Clear					
6	Mounting clip F	Polycarbonate	Clear					
7	Lift parts	Polycarbonate	Clear					
8	Magnet set A	Neogium, Stainless steel	Silver					
9								
10								
Specifications		Light Source Color	Deliverd CCT	6.4W/m	8.6W/m	Model Number		
Input voltage: DC24V		Natural White	N	4600K	Ra 92	518 lm	650 lm	LRMSM-T*W-N-DF-I*
Wattage: 6.4W/m, 8.6W/m		White	W	3700K	Ra 92	512 lm	643 lm	LRMSM-T*W-W-DF-I*
Max. length per curcuit: 3.5m		Warm white	WW	3300K	Ra 92	486 lm	610 lm	LRMSM-T*W-WW-DF-I*
Weight: 70g (@L1008)		Warm white	L30	2900K	Ra 91	478 lm	600 lm	LRMSM-T*W-L30-DF-I*
Environment: Indoor (No Condensation)		Warm white	L27	2600K	Ra 91	454 lm	570 lm	LRMSM-T*W-L27-DF-I*
Accessories: Mounting clip E		Warm white	L24	2400K	Ra 92	416 lm	522 lm	LRMSM-T*W-L24-DF-I*
Mounting clip F								
Lift parts								
Magnet set A								
Job / Project Name				Area / Location / Circuit No.				
Product Code		Qty.		Length (mm)				
Luci Pte. Ltd.		http://www.luci.co.jp		E-mail: info@luci.co.jp		LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.		
Singapore World HQ		Hong Kong Marketing Office		Korea Office		Shanghai China mainland Regional HQ		
Tel: +65-6291-2410		Tel: +852-2219-8462		Tel: +82-2-508-2541		Tel: +86-21-5238-9115		

front view



side view

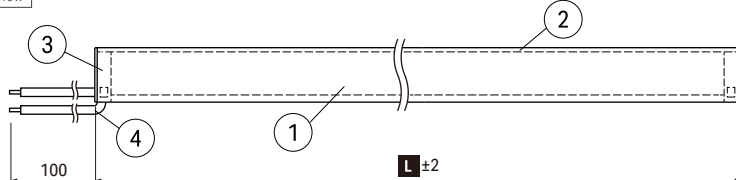


L : Custom order length (108 - 1008mm)


side view




Installation dimensions (Side view)

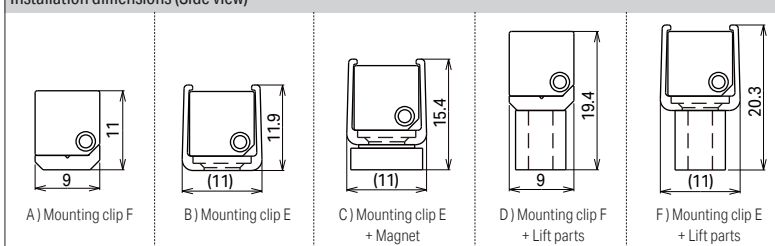

Accessories

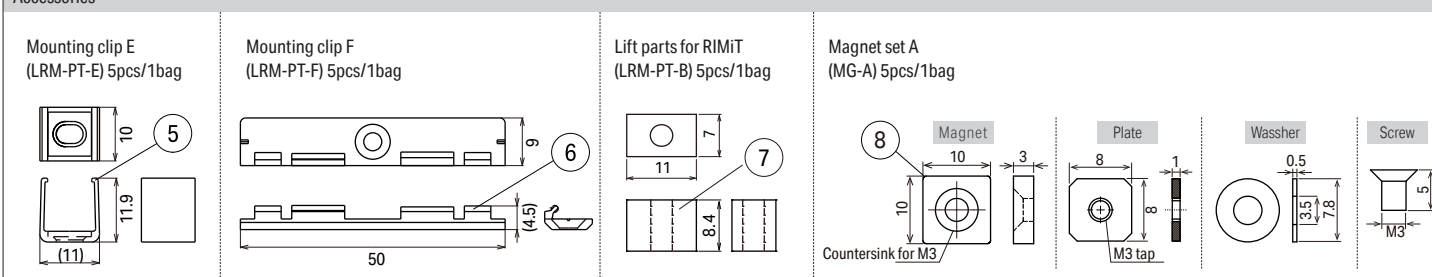

Part Name	Material	Note	Drawing		
1 Body	Aluminum	Alumite treatment, White painting			
2 Cover	Polycarbonate	Diffuser			
3 Side cover	ABS	White			
4 Lead wire		UL1007 AWG26 Black:+ White:-			
5 Mounting clip E	Polycarbonate	Clear			
6 Mounting clip F	Polycarbonate	Clear			
7 Lift parts	Polycarbonate	Clear			
8 Magnet set A	Neogium, Stainless steel	Silver			
9					
10					
Specifications					
Input voltage: DC24V	Light Source Color Natural White N	Deliverd CCT 4600K Ra 92	6.4W/m 518 lm	8.6W/m 650 lm	Model Number LRMSM-T*S-N-DF-I-*
Wattage: 6.4W/m, 8.6W/m	White W	3700K Ra 92	512 lm	643 lm	LRMSM-T*S-W-DF-I-*
Max. length per curcuit: 3.5m	Warm white WW	3300K Ra 92	486 lm	610 lm	LRMSM-T*S-WW-DF-I-*
Weight: 70g (@L1008)	Warm white L30	2900K Ra 91	478 lm	600 lm	LRMSM-T*S-L30-DF-I-*
Environment: Indoor (No Condensation)	Warm white L27	2600K Ra 91	454 lm	570 lm	LRMSM-T*S-L27-DF-I-*
Accessories: Mounting clip E	Warm white L24	2400K Ra 92	416 lm	522 lm	LRMSM-T*S-L24-DF-I-*
Mounting clip F					
Lift parts					
Magnet set A					
Job / Project Name			Area / Location / Circuit No.		
Product Code		Qty.	Length (mm)		
Luci Pte. Ltd.		http://www.luci.co.jp		E-mail: info@luci.co.jp	
Singapore World HQ		Hong Kong Marketing Office		Korea Office	
Tel: +65-6291-2410		Tel: +852-2219-8462		Tel: +82-2-508-2541	
				LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.	
				Shanghai China mainland Regional HQ	
				Tel: +86-21-5238-9115	

RIMiT series

Luci RIMiT sm


Luci RIMiT sm (Both ends lead wire, Connector)




Luci Pte., Ltd.

2025.10.08


front view




side view

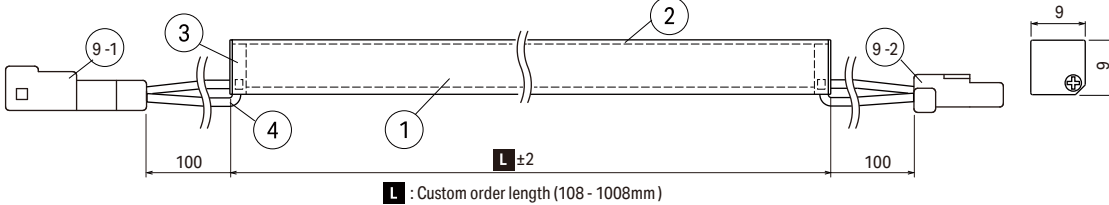


side view








Installation dimensions (Side view)

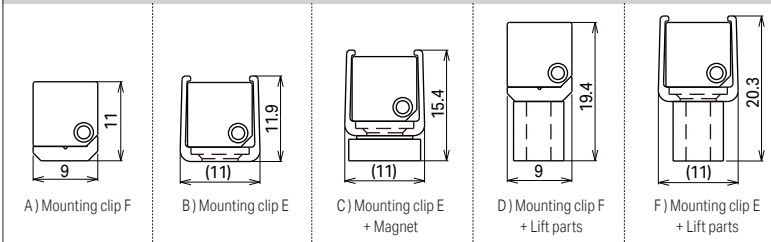


Connector




Accessories

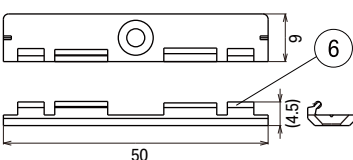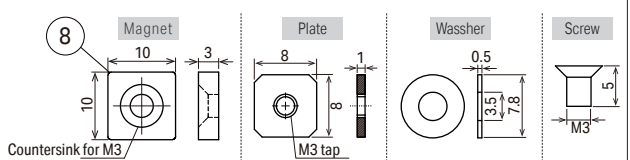
Power supply cable 3M with TR connector
(CAD-3000-MEFE-0)Mounting clip E
(LRM-PT-E) 5pcs/1bagMounting clip F
(LRM-PT-F) 5pcs/1bagLift parts for RIMiT
(LRM-PT-B) 5pcs/1bagMagnet set A
(MG-A) 5pcs/1bag

Part Name		Material	Note	Drawing 				
1	Body	Aluminum	Alumite treatment, White painting					
2	Cover	Polycarbonate	Diffuser					
3	Side cover	ABS	White					
4	Lead wire		UL1007 AWG26 Black:+ White:-					
5	Mounting clip E	Polycarbonate	Clear					
6	Mounting clip F	Polycarbonate	Clear					
7	Lift parts	Polycarbonate	Clear					
8	Magnet set A	Neogium, Stainless steel	Silver					
9	Connector	Nylon	9-1:SLR-02VF(JST) White, 9-2:SLP-02V(JST) White					
10								
Specifications		Light Source Color		Delivered CCT	6.4W/m	8.6W/m	Model Number	
Input voltage : DC24V		Natural White	N	4600K	Ra 92	518 lm	650 lm	LRMSM-T*W-N-DF-I-*(C)
Wattage: 6.4W/m, 8.6W/m		White	W	3700K	Ra 92	512 lm	643 lm	LRMSM-T*W-W-DF-I-*(C)
Max. length per circuit : 3.5m		Warm white	WW	3300K	Ra 92	486 lm	610 lm	LRMSM-T*W-WW-DF-I-*(C)
Weight : 70g (@L1008)		Warm white	L30	2900K	Ra 91	478 lm	600 lm	LRMSM-T*W-L30-DF-I-*(C)
Environment : Indoor (No Condensation)		Warm white	L27	2600K	Ra 91	454 lm	570 lm	LRMSM-T*W-L27-DF-I-**(C)
Accessories : Mounting clip E		Warm white	L24	2400K	Ra 92	416 lm	522 lm	LRMSM-T*W-L24-DF-I-*(C)
Mounting clip F								
Lift parts								
Magnet set A								
Job / Project Name					Area / Location / Circuit No.			
Product Code		Qty.		Length (mm)				
Luci Pte. Ltd.		http://www.luci.co.jp		E-mail: info@luci.co.jp		LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.		
Singapore World HQ		Hong Kong Marketing Office		Korea Office		Shanghai China mainland Regional HQ		
Tel: +65-6291-2410		Tel: +852-2219-8462		Tel: +82-2-508-2541		Tel: +86-21-5238-9115		

front view




side view

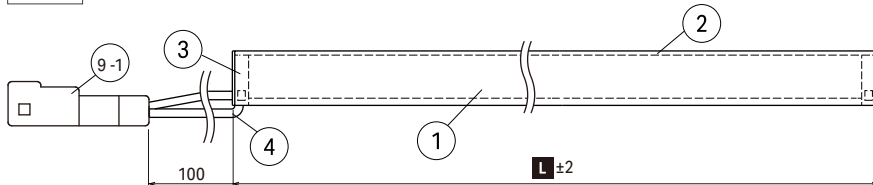


L : Custom order length (108 - 1008mm)


side view



Installation dimensions (Side view)




A) Mounting clip F




B) Mounting clip E



C) Mounting clip E + Magnet



D) Mounting clip F + Lift parts




F) Mounting clip E + Lift parts

Connector




Accessories


Power supply cable 3M with TR connector
(CAD-3000-MEFE-0)




Mounting clip E
(LRM-PT-E) 5pcs/1bag




Mounting clip F
(LRM-PT-F) 5pcs/1bag

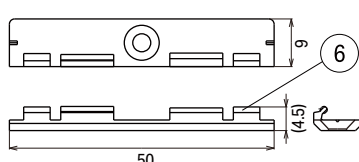


Lift parts for RIMiT
(LRM-PT-B) 5pcs/1bag



Magnet set A
(MG-A) 5pcs/1bag

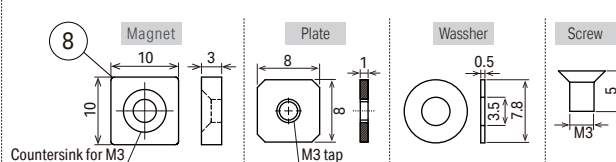

Part Name	Material	Note	Drawing
1 Body	Aluminum	Alumite treatment, White painting	
2 Cover	Polycarbonate	Diffuser	
3 Side cover	ABS	White	
4 Lead wire		UL1007 AWG26 Black:+ White:-	
5 Mounting clip E	Polycarbonate	Clear	
6 Mounting clip F	Polycarbonate	Clear	
7 Lift parts	Polycarbonate	Clear	
8 Magnet set A	Neogium, Stainless steel	Silver	
9 Connector	Nylon	9-1:SLR-02VF(JST) White, 9-2:SLP-02V(JST) White	
10			

Specifications	Light Source Color	Deliverd CCT	6.4W/m	8.6W/m	Model Number
Input voltage: DC24V	Natural White N	4600K Ra 92	518 lm	650 lm	LRMSM-T*S-N-DF-I-*(C)
Wattage: 6.4W/m, 8.6W/m	White W	3700K Ra 92	512 lm	643 lm	LRMSM-T*S-W-DF-I-*(C)
Max. length per circuit: 3.5m	Warm white WW	3300K Ra 92	486 lm	610 lm	LRMSM-T*S-WW-DF-I-*(C)
Weight: 70g (@L1008)	Warm white L30	2900K Ra 91	478 lm	600 lm	LRMSM-T*S-L30-DF-I-*(C)
Environment: Indoor (No Condensation)	Warm white L27	2600K Ra 91	454 lm	570 lm	LRMSM-T*S-L27-DF-I-*(C)
Accessories: Mounting clip E	Warm white L24	2400K Ra 92	416 lm	522 lm	LRMSM-T*S-L24-DF-I-*(C)
Mounting clip F					
Lift parts					
Magnet set A					

Job / Project Name

Area / Location / Circuit No.

Product Code

Qty.

Length (mm)

Luci Pte. Ltd.
Singapore World HQ
Tel: +65-6291-2410

<http://www.luci.co.jp>
Hong Kong Marketing Office
Tel: +852-2219-8462

E-mail: info@luci.co.jp
Korea Office
Tel: +82-2-508-2541

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.
Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115

Luci RIMiT sm _ Custom order length

Length	Model No.	Fitting length (mm)	Wattage (W)		Mounting Clip
			6.4W/m	8.6W/m	
0033	LRMSM-T0033*-DF-I*	32.2	0.2	0.2	1 pcs Recommended pitch 60 to 230mm
0058	LRMSM-T0058*-DF-I*	57.2	0.3	0.4	
0083	LRMSM-T0083*-DF-I*	82.2	0.5	0.6	
0108	LRMSM-T0108*-DF-I*	107.2	0.6	0.9	
0133	LRMSM-T0133*-DF-I*	132.2	0.8	1.1	
0158	LRMSM-T0158*-DF-I*	157.2	1.0	1.3	
0183	LRMSM-T0183*-DF-I*	182.2	1.1	1.5	
0208	LRMSM-T0208*-DF-I*	207.2	1.3	1.7	
0233	LRMSM-T0233*-DF-I*	232.2	1.4	1.9	3 pcs Recommended pitch 140 to 370mm
0258	LRMSM-T0258*-DF-I*	257.2	1.6	2.1	
0283	LRMSM-T0283*-DF-I*	282.2	1.8	2.4	
0308	LRMSM-T0308*-DF-I*	307.2	1.9	2.6	
0333	LRMSM-T0333*-DF-I*	332.2	2.1	2.8	
0358	LRMSM-T0358*-DF-I*	357.2	2.2	3.0	
0383	LRMSM-T0383*-DF-I*	382.2	2.4	3.2	
0408	LRMSM-T0408*-DF-I*	407.2	2.6	3.4	
0433	LRMSM-T0433*-DF-I*	432.2	2.7	3.6	4 pcs Recommended pitch 250 to 400mm
0458	LRMSM-T0458*-DF-I*	457.2	2.9	3.9	
0483	LRMSM-T0483*-DF-I*	482.2	3.0	4.1	
0508	LRMSM-T0508*-DF-I*	507.2	3.2	4.3	
0533	LRMSM-T0533*-DF-I*	532.2	3.4	4.5	
0558	LRMSM-T0558*-DF-I*	557.2	3.5	4.7	
0583	LRMSM-T0583*-DF-I*	582.2	3.7	4.9	
0608	LRMSM-T0608*-DF-I*	607.2	3.8	5.1	
0633	LRMSM-T0633*-DF-I*	632.2	4.0	5.4	5 pcs Recommended pitch 315 to 375mm
0658	LRMSM-T0658*-DF-I*	657.2	4.2	5.6	
0683	LRMSM-T0683*-DF-I*	682.2	4.3	5.8	
0708	LRMSM-T0708*-DF-I*	707.2	4.5	6.0	
0733	LRMSM-T0733*-DF-I*	732.2	4.6	6.2	
0758	LRMSM-T0758*-DF-I*	757.2	4.8	6.4	
0783	LRMSM-T0783*-DF-I*	782.2	5.0	6.6	
0808	LRMSM-T0808*-DF-I*	807.2	5.1	6.8	
0833	LRMSM-T0833*-DF-I*	832.2	5.3	7.1	
0858	LRMSM-T0858*-DF-I*	857.2	5.4	7.3	
0883	LRMSM-T0883*-DF-I*	882.2	5.6	7.5	
0908	LRMSM-T0908*-DF-I*	907.2	5.8	7.7	
0933	LRMSM-T0933*-DF-I*	932.2	5.9	7.9	
0958	LRMSM-T0958*-DF-I*	957.2	6.1	8.1	
0983	LRMSM-T0983*-DF-I*	982.2	6.2	8.3	
1008	LRMSM-T1008*-DF-I*	1007.2	6.4	8.6	
1033	LRMSM-T1033*-DF-I*	1032.2	6.6	8.8	
1058	LRMSM-T1058*-DF-I*	1057.2	6.7	9.0	
1083	LRMSM-T1083*-DF-I*	1082.2	6.9	9.2	
1108	LRMSM-T1108*-DF-I*	1107.2	7.0	9.4	
1133	LRMSM-T1133*-DF-I*	1132.2	7.2	9.6	
1158	LRMSM-T1158*-DF-I*	1157.2	7.4	9.8	
1183	LRMSM-T1183*-DF-I*	1182.2	7.5	10.1	
1208	LRMSM-T1208*-DF-I*	1207.2	7.7	10.3	
1233	LRMSM-T1233*-DF-I*	1232.2	7.8	10.5	
1258	LRMSM-T1258*-DF-I*	1257.2	8.0	10.7	
1283	LRMSM-T1283*-DF-I*	1282.2	8.2	10.9	
1308	LRMSM-T1308*-DF-I*	1307.2	8.3	11.1	
1333	LRMSM-T1333*-DF-I*	1332.2	8.5	11.3	
1358	LRMSM-T1358*-DF-I*	1357.2	8.6	11.6	
1383	LRMSM-T1383*-DF-I*	1382.2	8.8	11.8	
1408	LRMSM-T1408*-DF-I*	1407.2	9.0	12.0	
1433	LRMSM-T1433*-DF-I*	1432.2	9.1	12.2	
1458	LRMSM-T1458*-DF-I*	1457.2	9.3	12.4	
1483	LRMSM-T1483*-DF-I*	1482.2	9.4	12.6	
1508	LRMSM-T1508*-DF-I*	1507.2	9.6	12.8	

Accessories

LRM-PT-E	Mounting clip for E 5pcs/1bag
LRM-PT-F	Mounting clip F for RIMiT 5pcs/1bag
LRM-PT-B	Lift Parts for RIMiT 5pcs/1bag
MG-A	Magnet set A 5pcs/1bag