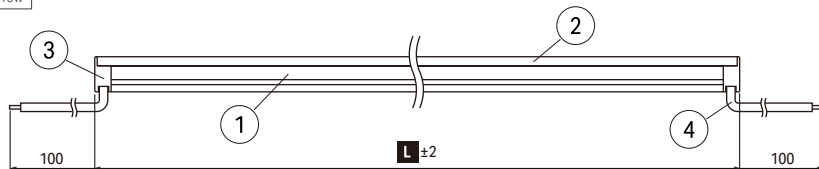


front view




side view

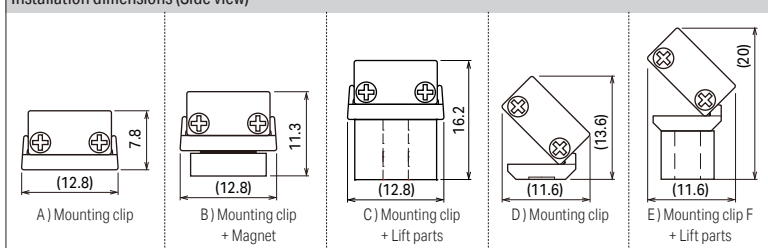


L : Custom order length (108 - 1008mm)


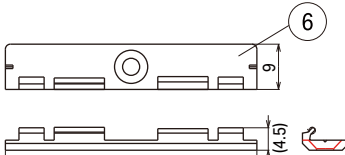

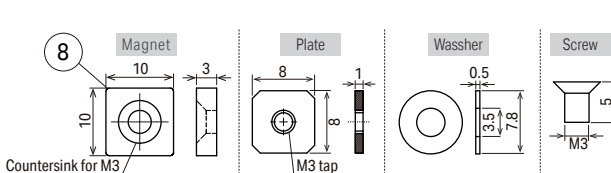
side view




Installation dimensions (Side view)



Accessories

Mounting clip for RIMiT us
(LRMUS-PT-A) 5pcs/1bagMounting clip F
(LRM-PT-F) 5pcs/1bagLift parts for RIMiT
(LRM-PT-B) 5pcs/1bagMagnet set A
(MG-A) 5pcs/1bag

Part Name		Material	Note	Drawing				
1	Body	Aluminum	Alumite treatment, White painting					
2	Cover	Polycarbonate	Diffuser					
3	Side cover	ABS	White					
4	Lead wire		UL1007 AWG26 Black:+ White:-					
5	Mounting clip for RIMiT us	Polycarbonate	Clear					
6	Mounting clip F	Polycarbonate	Clear					
7	Lift parts	Polycarbonate	Clear					
8	Magnet set A	Neogium, Stainless steel	Silver					
9								
10								
Specifications		Light Source Color	Deliverd CCT	6.4W/m	8.6W/m	Model Number		
Input voltage: DC24V		Natural White	N	4600K	Ra 92	484 lm	603 lm	LRMUS-T*W-N-DF-I-*
Wattage: 6.4W/m, 8.6W/m		White	W	3700K	Ra 91	474 lm	592 lm	LRMUS-T*W-W-DF-I-*
Max. length per curcuit: 3.5m		Warm white	WW	3300K	Ra 93	440 lm	549 lm	LRMUS-T*W-WW-DF-I-*
Weight: 70g (@L1008)		Warm white	L30	2900K	Ra 92	440 lm	549 lm	LRMUS-T*W-L30-DF-I-*
Environment: Indoor (No Condensation)		Warm white	L27	2600K	Ra 92	412 lm	514 lm	LRMUS-T*W-L27-DF-I-*
Accessories: Mounting clip for RIMiT us		Warm white	L24	2400K	Ra 92	380 lm	475 lm	LRMUS-T*W-L24-DF-I-*
Mounting clip F								
Lift parts								
Magnet set A								
Job / Project Name				Area / Location / Circuit No.				
Product Code		Qty.		Length (mm)				
Luci Pte. Ltd.		http://www.luci.co.jp		E-mail: info@luci.co.jp		LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.		
Singapore World HQ		Hong Kong Marketing Office		Korea Office		Shanghai China mainland Regional HQ		
Tel: +65-6291-2410		Tel: +852-2219-8462		Tel: +82-2-508-2541		Tel: +86-21-5238-9115		

RIMiT series

Luci RIMiT us

Luci RIMiT us (One end lead wire)



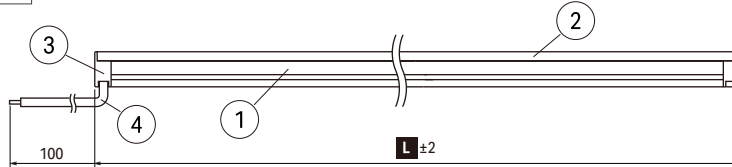
Luci Pte., Ltd.

2025.10.08

front view




side view

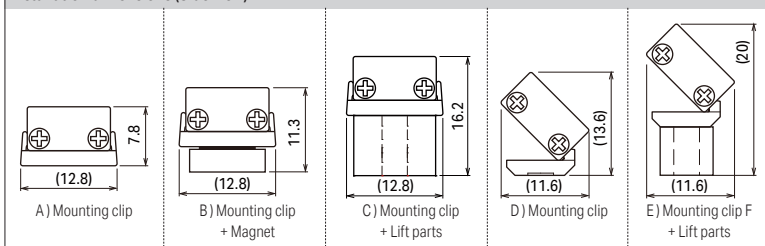


L : Custom order length (108 - 1008mm)




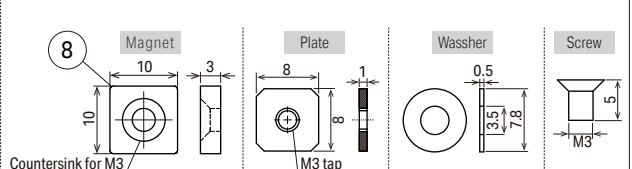
side view



Installation dimensions (Side view)



Accessories

Mounting clip for RIMiT us
(LRMUS-PT-A) 5pcs/1bagMounting clip F
(LRM-PT-F) 5pcs/1bagLift parts for RIMiT
(LRM-PT-B) 5pcs/1bagMagnet set A
(MG-A) 5pcs/1bag

Part Name	Material	Note	Drawing
1 Body	Aluminum	Alumite treatment, White painting	
2 Cover	Polycarbonate	Diffuser	
3 Side cover	ABS	White	
4 Lead wire		UL1007 AWG26 Black:+ White:-	
5 Mounting clip for RIMiT us	Polycarbonate	Clear	
6 Mounting clip F	Polycarbonate	Clear	
7 Lift parts	Polycarbonate	Clear	
8 Magnet set A	Neogium, Stainless steel	Silver	
9			
10			

Specifications	Light Source Color	Deliverd CCT	6.4W/m	8.6W/m	Model Number
Input voltage: DC24V	Natural White N	4600K Ra 92	484 lm	603 lm	LRMUS-T*S-N-DF-I-*
Wattage: 6.4W/m, 8.6W/m	White W	3700K Ra 91	474 lm	592 lm	LRMUS-T*S-W-DF-I-*
Max. length per circuit: 3.5m	Warm white WW	3300K Ra 93	440 lm	549 lm	LRMUS-T*S-WW-DF-I-*
Weight: 70g (@L1008)	Warm white L30	2900K Ra 92	440 lm	549 lm	LRMUS-T*S-L30-DF-I-*
Environment: Indoor (No Condensation)	Warm white L27	2600K Ra 92	412 lm	514 lm	LRMUS-T*S-L27-DF-I-*
Accessories: Mounting clip for RIMiT us	Warm white L24	2400K Ra 92	380 lm	475 lm	LRMUS-T*S-L24-DF-I-*
Mounting clip F					
Lift parts					
Magnet set A					

Job / Project Name

Area / Location / Circuit No.

Product Code

Qty.

Length (mm)

Luci Pte. Ltd.
Singapore World HQ
Tel: +65-6291-2410

<http://www.luci.co.jp>
Hong Kong Marketing Office
Tel: +852-2219-8462

E-mail: info@luci.co.jp
Korea Office
Tel: +82-2-508-2541

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.
Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115

RIMiT series

Luci RIMiT us

Luci RIMiT us (Both ends lead wire, Connector)



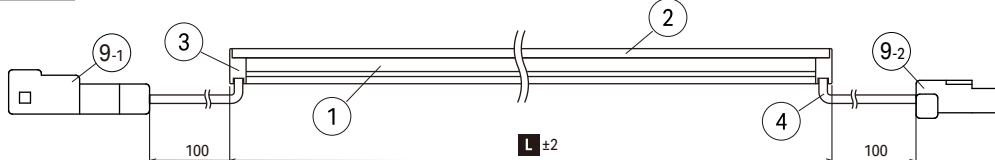
Luci Pte., Ltd.

2025.10.08

front view




side view

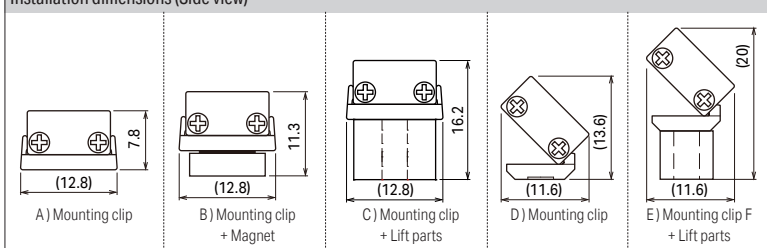


L : Custom order length (108 - 1008mm)


side view







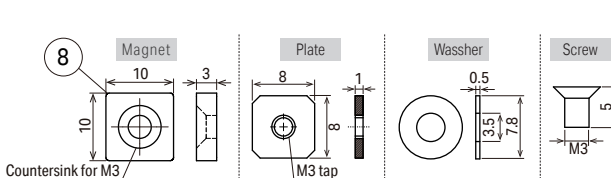
Installation dimensions (Side view)




Connector




Accessories

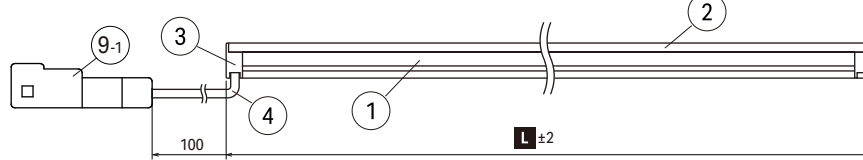
Power supply cable 3M with TR connector
(CAD-3000-MEFE-0)Mounting clip for RIMiT us
(LRMUS-PT-A) 5pcs/1bagMounting clip F
(LRM-PT-F) 5pcs/1bagLift parts for RIMiT
(LRM-PT-B) 5pcs/1bagMagnet set A
(MG-A) 5pcs/1bag

Part Name		Material	Note	Drawing		
1	Body	Aluminum	Alumite treatment, White painting			
2	Cover	Polycarbonate	Diffuser			
3	Side cover	ABS	White			
4	Lead wire		UL1007 AWG26 Black:+ White:-			
5	Mounting clip for RIMiT us	Polycarbonate	Clear			
6	Mounting clip F	Polycarbonate	Clear			
7	Lift parts	Polycarbonate	Clear			
8	Magnet set A	Neogium, Stainless steel	Silver			
9	Connector	Nylon	9-1:SLR-02VF(JST) White, 9-2:SLP-02V(JST) White			
10						
Specifications						
Input voltage: DC24V		Natural White N	4600K Ra 92	484 lm	603 lm	Model Number LRMUS-T*W-N-DF-I-*(C) LRMUS-T*W-W-DF-I-*(C) LRMUS-T*W-WW-DF-I-*(C) LRMUS-T*W-L30-DF-I-*(C) LRMUS-T*W-L27-DF-I-*(C) LRMUS-T*W-L24-DF-I-*(C)
Wattage: 6.4W/m, 8.6W/m		White W	3700K Ra 91	474 lm	592 lm	
Max. length per circuit: 3.5m		Warm white WW	3300K Ra 93	440 lm	549 lm	
Weight: 70g (@L1008)		Warm white L30	2900K Ra 92	440 lm	549 lm	
Environment: Indoor (No Condensation)		Warm white L27	2600K Ra 92	412 lm	514 lm	
Accessories: Mounting clip for RIMiT us		Warm white L24	2400K Ra 92	380 lm	475 lm	
Mounting clip F						
Lift parts						
Magnet set A						
Job / Project Name			Area / Location / Circuit No.			
Product Code		Qty.	Length (mm)			
Luci Pte. Ltd.		http://www.luci.co.jp		E-mail: info@luci.co.jp		LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD. Shanghai China mainland Regional HQ Tel: +86-21-5238-9115
Singapore World HQ		Hong Kong Marketing Office		Korea Office		
Tel: +65-6291-2410		Tel: +852-2219-8462		Tel: +82-2-508-2541		


front view



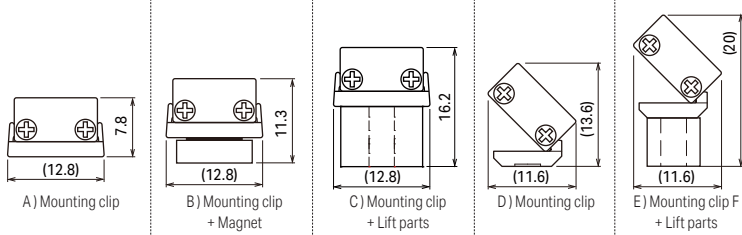
side view


L : Custom order length (108 - 1008mm)


side view







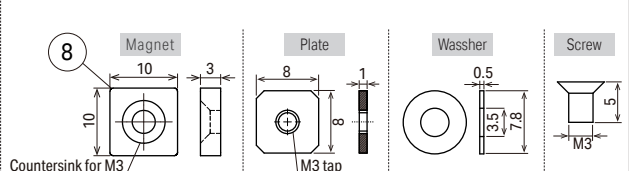
Installation dimensions (Side view)




Connector



Accessories

 Power supply cable 3M with TR connector
(CAD-3000-MEFE-0)

 Mounting clip for RIMiT us
(LRMUS-PT-A) 5pcs/1bag

 Mounting clip F
(LRM-PT-F) 5pcs/1bag

 Lift parts for RIMiT
(LRM-PT-B) 5pcs/1bag

 Magnet set A
(MG-A) 5pcs/1bag


Part Name	Material	Note	Drawing
1 Body	Aluminum	Alumite treatment, White painting	
2 Cover	Polycarbonate	Diffuser	
3 Side cover	ABS	White	
4 Lead wire		UL1007 AWG26 Black:+ White:-	
5 Mounting clip for RIMiT us	Polycarbonate	Clear	
6 Mounting clip F	Polycarbonate	Clear	
7 Lift parts	Polycarbonate	Clear	
8 Magnet set A	Neogium, Stainless steel	Silver	
9 Connector	Nylon	9-1:SLR-02VF(JST) White, 9-2:SLP-02V(JST) White	
10			

Specifications	Light Source Color	Delivred CCT	6.4W/m	8.6W/m	Model Number
Input voltage : DC24V	Natural White N	4600K Ra 92	484 lm	603 lm	LRMUS-T*S-N-DF-I-*(C)
Wattage: 6.4W/m, 8.6W/m	White W	3700K Ra 91	474 lm	592 lm	LRMUS-T*S-W-DF-I-*(C)
Max. length per curcuit : 3.5m	Warm white WW	3300K Ra 93	440 lm	549 lm	LRMUS-T*S-WW-DF-I-*(C)
Weight : 70g (@L1008)	Warm white L30	2900K Ra 92	440 lm	549 lm	LRMUS-T*S-L30-DF-I-*(C)
Environment : Indoor (No Condensation)	Warm white L27	2600K Ra 92	412 lm	514 lm	LRMUS-T*S-L27-DF-I-*(C)
Accessories : Mounting clip for RIMiT us	Warm white L24	2400K Ra 92	380 lm	475 lm	LRMUS-T*S-L24-DF-I-*(C)
Mounting clip F					
Lift parts					
Magnet set A					

Job / Project Name

Area / Location / Circuit No.

Product Code

Qty.

Length (mm)

 Luci Pte. Ltd.
Singapore World HQ
Tel: +65-6291-2410

<http://www.luci.co.jp>
Hong Kong Marketing Office
Tel: +852-2219-8462

 E-mail: info@luci.co.jp
Korea Office
Tel: +82-2-508-2541

 LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.
Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115

Luci RIMiT us _ Custom order length

Length	Model No.	Fitting length (mm)	Wattage (W)		Mounting Clip
			6.4W/m	8.6W/m	
0033	LRMUS-T0033*-DF-I*	32.2	0.2	0.2	1 pcs Recommended pitch 60 to 230mm
0058	LRMUS-T0058*-DF-I*	57.2	0.3	0.4	
0083	LRMUS-T0083*-DF-I*	82.2	0.5	0.6	
0108	LRMUS-T0108*-DF-I*	107.2	0.6	0.9	
0133	LRMUS-T0133*-DF-I*	132.2	0.8	1.1	
0158	LRMUS-T0158*-DF-I*	157.2	1.0	1.3	
0183	LRMUS-T0183*-DF-I*	182.2	1.1	1.5	
0208	LRMUS-T0208*-DF-I*	207.2	1.3	1.7	
0233	LRMUS-T0233*-DF-I*	232.2	1.4	1.9	
0258	LRMUS-T0258*-DF-I*	257.2	1.6	2.1	
0283	LRMUS-T0283*-DF-I*	282.2	1.8	2.4	3 pcs Recommended pitch 140 to 370mm
0308	LRMUS-T0308*-DF-I*	307.2	1.9	2.6	
0333	LRMUS-T0333*-DF-I*	332.2	2.1	2.8	
0358	LRMUS-T0358*-DF-I*	357.2	2.2	3.0	
0383	LRMUS-T0383*-DF-I*	382.2	2.4	3.2	
0408	LRMUS-T0408*-DF-I*	407.2	2.6	3.4	
0433	LRMUS-T0433*-DF-I*	432.2	2.7	3.6	
0458	LRMUS-T0458*-DF-I*	457.2	2.9	3.9	
0483	LRMUS-T0483*-DF-I*	482.2	3.0	4.1	
0508	LRMUS-T0508*-DF-I*	507.2	3.2	4.3	
0533	LRMUS-T0533*-DF-I*	532.2	3.4	4.5	
0558	LRMUS-T0558*-DF-I*	557.2	3.5	4.7	
0583	LRMUS-T0583*-DF-I*	582.2	3.7	4.9	
0608	LRMUS-T0608*-DF-I*	607.2	3.8	5.1	
0633	LRMUS-T0633*-DF-I*	632.2	4.0	5.4	
0658	LRMUS-T0658*-DF-I*	657.2	4.2	5.6	
0683	LRMUS-T0683*-DF-I*	682.2	4.3	5.8	
0708	LRMUS-T0708*-DF-I*	707.2	4.5	6.0	
0733	LRMUS-T0733*-DF-I*	732.2	4.6	6.2	
0758	LRMUS-T0758*-DF-I*	757.2	4.8	6.4	
0783	LRMUS-T0783*-DF-I*	782.2	5.0	6.6	4 pcs Recommended pitch 250 to 400mm
0808	LRMUS-T0808*-DF-I*	807.2	5.1	6.8	
0833	LRMUS-T0833*-DF-I*	832.2	5.3	7.1	
0858	LRMUS-T0858*-DF-I*	857.2	5.4	7.3	
0883	LRMUS-T0883*-DF-I*	882.2	5.6	7.5	
0908	LRMUS-T0908*-DF-I*	907.2	5.8	7.7	
0933	LRMUS-T0933*-DF-I*	932.2	5.9	7.9	
0958	LRMUS-T0958*-DF-I*	957.2	6.1	8.1	
0983	LRMUS-T0983*-DF-I*	982.2	6.2	8.3	
1008	LRMUS-T1008*-DF-I*	1007.2	6.4	8.6	
1033	LRMUS-T1033*-DF-I*	1032.2	6.6	8.8	
1058	LRMUS-T1058*-DF-I*	1057.2	6.7	9.0	
1083	LRMUS-T1083*-DF-I*	1082.2	6.9	9.2	
1108	LRMUS-T1108*-DF-I*	1107.2	7.0	9.4	
1133	LRMUS-T1133*-DF-I*	1132.2	7.2	9.6	
1158	LRMUS-T1158*-DF-I*	1157.2	7.4	9.8	
1183	LRMUS-T1183*-DF-I*	1182.2	7.5	10.1	
1208	LRMUS-T1208*-DF-I*	1207.2	7.7	10.3	
1233	LRMUS-T1233*-DF-I*	1232.2	7.8	10.5	
1258	LRMUS-T1258*-DF-I*	1257.2	8.0	10.7	
1283	LRMUS-T1283*-DF-I*	1282.2	8.2	10.9	5 pcs Recommended pitch 315 to 375mm
1308	LRMUS-T1308*-DF-I*	1307.2	8.3	11.1	
1333	LRMUS-T1333*-DF-I*	1332.2	8.5	11.3	
1358	LRMUS-T1358*-DF-I*	1357.2	8.6	11.6	
1383	LRMUS-T1383*-DF-I*	1382.2	8.8	11.8	
1408	LRMUS-T1408*-DF-I*	1407.2	9.0	12.0	
1433	LRMUS-T1433*-DF-I*	1432.2	9.1	12.2	
1458	LRMUS-T1458*-DF-I*	1457.2	9.3	12.4	
1483	LRMUS-T1483*-DF-I*	1482.2	9.4	12.6	
1508	LRMUS-T1508*-DF-I*	1507.2	9.6	12.8	

Accessories

LRMUS-PT-A	Mounting clip for RIMiT us 5pcs/1bag
LRM-PT-F	Mounting clip F for RIMiT 5pcs/1bag
LRM-PT-B	Lift Parts for RIMiT 5pcs/1bag
MG-A	Magnet set A 5pcs/1bag