

Luci RIMiT zen

Indoor use only Instruction Manual

Luci Pte. Ltd. Singapore Regional HQ

13A Bukit Pasoh Road, Singapore 089827

TEL +65-6291-2410


Luci Co., Ltd. Tokyo Japan World HQ

Akasaka Bldg. 3F, 4-13-13, Akasaka, Minato-ku, Tokyo 107-0052, Japan Tel: +81-3-6327-7409

⚠ To ensure safe usage


The following are the safety cautions to prevent any harm or damage to others.


If the product is used against cautions, it may cause damage, electric shock, smoke or fire.



Supplying power through the lead wires on both sides may cause failure and fire. If using only one LED fixture, insulate the unused connector with self-adhesive tape or electrical tape.








and building structure.

occurs, which may cause fire

Incomplete connection may cause heating, smoke, and fire.




Do not use the product if the cover is damaged. Risk of an accident and electrical shock.

The product must be allowed to dissipate heat.

Allow sufficient space for ventilation (heat dissipation) between the light fixture

Avoid installing the llight fixture close to each other. It may shorten product life or cause fire







Do not place or cover the light fixture with a heatable object such as cloth, paper or insulating material. It may fail to light up or cause fire.

Do not allow an open-ended fixture to have contact with any metal.


Do not place or install light fixture in close contact with other electric equipment in or out of ceiling area to prevent fall, electric shock or fire caused by vibration from electric equipment.


Do not operate the device with wet hands. It may result in an electric shock.













 \bigcirc

If the product is dirty, wipe with a dry cloth.

Do not use thinner, benzene, or other organic solvents to clean the product and do not wash with water.



Important notice for storage

Please ensure the fixture is stored within -10°C to 55° C

Please do not store the carton or the packages of our light fittings in the following conditions:

- Wet location
- Places of high humidity
- Dusty or dirty places
- Place that sunlight is directly exposed.
- Places where a solvent such as a paint liquid is stored

During storage ensure the cartons upright.

Please do not open individual package until just before installing light fixture to avoid any damage to the light fittings.

Please do not place heavy object on the carton.

Please do not use our light fixture as the working light during construction period.



This light fixture is for indoor use only.

Do not use in the following environments:

- Outdo
 - Outdoors - Location at high temperature (+35°C or higher) .
 - (Operating temprature is 0°C to 35°C)
 - Location where water may splash onto the product.
 - Location with high humidity.
 - A dusty location.
 - Location with corrosive or inflammable gases.
 - Airtight location.
 - Location with direct exposure to salt water or organic solvents
 - Location in direct sunlight.
 - Location subject to the effects of electric or magnetic fields.
 - Location subject to intense vibration or shock, or a location subject to continuous vibration.



Do not do the following:

- Forcibly remove the product after mounting it.
Disassemble, modify, or add holes to the product.
Forcibly pull or twist the product.

Cut or damage the power cable. Use a damaged cable.

Press down on the product.

Drop the product or subject the product to intense vibration or shock.

Please read before the usage

Use the special mounting fixture to mount the light fixture to the mounting location, and verify that the mounting is secure.

The product has been manufactured with the utmost care; however, please understand that slight deviations in LED color are unavoidable due to the characteristics of the product.

Caution: Must choose suitable power supply

Refer to the power supply manual for temperature, humidity and other operating conditions.

Maintenance and Inspection

- Light fixture has a life snar
- Degradation of inner materials occurs after 8-10 years of installation even when the light fixture looks fine from the outside.
- Components of the light fixture degrade due to the generation of heat when the light is on for a long time.
- This causes not only safety issues, but also reduces power efficiency and it is recommended to have regular maintenance and inspection.
- Cleaning and inspection should be carried out at least once every 6 months.
- At least once every 3 years, an inspection should be carried out by a specialist such as a product contractor.
- If the light fixture is used for a long time without having an inspection, there is a small possibility that it could lead to fuming, igniting, electric shock and the like. Cleaning Method

Inspection Methods

- Is LED operating normally?
- Is there any unusual smell, sound or heat?
- Are there cracks, slits, or detached parts on any part or joint?

Cleaning Method

- Lightly wipe the light fixture with a soft cloth.
- To best clean the light fixture, wipe dirt with a soft cloth which has been soaked in a neutral detergent diluted with water and squeeze firmly. To finish off, wipe it with a damp cloth and dry it.



Installation dimensions (Side view)


13.8

A) Mounting clip

Luci RIMiT zen

Indoor use only Instruction Manual






No.	Item name	Material etc.
1	Body	Polycarbonate, Diffuser
2	Side cover	ABS,White
3	Lead Wire	UL1007 AWG26 Black:+, White:-
4	Mounting clip	Polycarbonate, Clear
(5)	Lift parts	Polycarbonate, Clear
6	Magnet set	Neogium, Stainless steel, Steel
7	Connector	Nylon
8	Heat sink	Aluminum, White
9	Mounting clip D	Polycarbonate, Clear

Input Voltage


DC24V

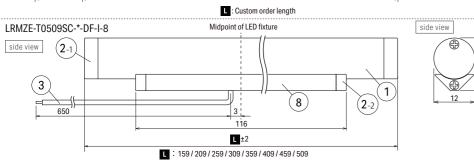



13.8

C) Mounting clip

+ Lift parts





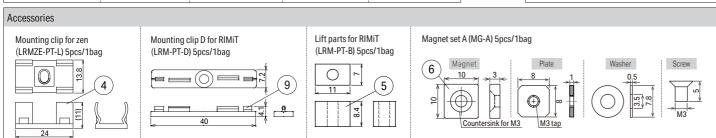

D) Mounting clip D

Item / Product Name	Luci RI	MiT zen	
Lead wire	One end lead wire	Midpoint lead wire	
Model No.	LRMZE-T1009SS-*-DF-I-8	LRMZE-T0509SC-*-DF-I-8	
Wattage (Ta=25°C)	8.9 W	4.5 W	
Input current (A/m)	358 mA (Max)	179 mA (Max)	
Length	1009 mm	509 mm	
Weight	70 g	38 g	
Number of LED	640	320	
Max. Length	1.0 m	0.5 m	
Operating temperature	0°C to 35°C		
Environment	Indoor (No Condensation)		
Material	Polycarbonate		
Attachments	-		
Accessories	Mounting clip for RIMiT zen, Lift parts, Mounting clip D Custom order: Connector, Lead wire length), Magnet set A	
Light source color	Natural white 4600K(N), White 3700K(W), Warm white 3500K(WW), Warm white 2900K(L30), Warm white 2600K(L27), Warm white 2400K(L24)		
Dimmable	Yes (0-10V, 1-10V, DMX, DALI, PWM, Casambi)		

Max. connectable length per PSU		
Length of LED fixture (70% loading factor) *: split into multiple circuits	PSU	
3.9 m*	50 W	
7.8 m*	100 W	
11.7 m*	150 W	

Installing the product


1) When installing the mounting clips, ensure that all the clips are installed in the same level on a plane surface and aligned on the center line. 2) When installing the LED fixture on the mounting clip, ensure to click it completely.

In the event of improper installation, LED fixture may have unexpected cracking sound and disconnect from the clips.

Mounting clip for RIMiT zen (LRMZE-PT-L)


Mounting clip for RIMiT zen (LRMZE-PT-L) and Lift parts for RIMiT (LRM-PT-B)

The lighting can be rotated freely within the clip and cannot be mounted vertically with this clip.



Fix the mounting clip F with screw supplied by installer (Recommended: Flat head screw M3)

Insert the LED fixtures by pressing them against the clip protrusion until they are securely locked in place as shown above (horizonal circle of the right image).



Fix the Mounting clips and Lift parts with screw supplied by the installer. (Recommended: Flat head screw M3 x 15mm or longer).

The mounting clips are designed to hold the LED fixture in place by spreading



Please make sure to flush the Flat head screws with the surface of the mounting clip. Otherwise, the LED fixture may not be completely hooked and may fall off.


both sides. Please leave at least 3mm of gap on both sides for maintenance.

Recommended positions for RIMiT zen mounting clips with screw or magnet

Recommended mounting positions vary depending on the length of the light fixture (pitch: 20mm - 300mm: quantity 2-5 pieces) Please refer to the seperate table provided.



Installing magnet to the mounting clip for RIMiT zen

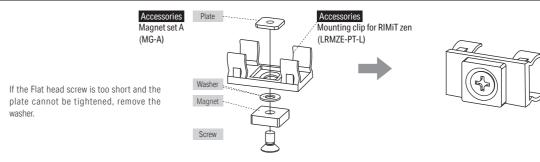



Luci RIMiT zen


Indoor use only Instruction Manual

Mounting clip for RIMiT zen (LRMZE-PT-L)

Mounting clip for RIMiT zen (LRMZE-PT-L) and Lift parts for RIMiT (LRM-PT-B)

For Midpoint lead wire type

Not adjustable




Fix the mounting clip D with screw supplied

(Recommended: Flat head screw M3)

Insert the LED fixtures by pressing them against the clip protrusion until they are securely locked in place as shown above (horizonal circle of the right image).

Please make sure to flush the Flat head screw with the surface of the mounting




Fix the Mounting clip D and Lift parts with screw supplied by the installer. (Recommended: Flat head screw M3 x 15mm or longer).



clip. Otherwise, the LED fixture may not be completely hooked and may fall off.

Recommended positions for mounting clip D

The number of clips and recommended mounting positions are the same for different lengths of LED fixtures (pitch: 56 mm, quantity: 2 pieces).



Connecting to the power supply

Caution: Must choose suitable power supply


- Cables used for connecting light fixtures and Power supply must be a suitable type and gauge.
- Cables should be joined with suitable terminal block or methods as appropriate to the installation and operating environment.

Caution: When using a long cable with thin dimension, the resistance of cable will increase. Voltage drop and heat dispatching may occur and result in a drop in brightness.

Caution: When separating one cable to multiple circuits in the same gauge, the current loading focuses on the junction of the branch circuit and high temperature will liberate on there. Please consider the loading of the power supply (quantity of light fixture) and review the wiring system to avoid the above problem.

- When connecting the dimmer driver with power supply, unpredicted noise might occur. It is a characteristic of electronic devices, not a malfunction of the light fixture. Please choose an appropriate power supply and consider to have enough space to install. Reducing the loading factor of light fixture might improve the noise from the power supply while the noise for the light fixtures might be improved by splitting the circuit of light fixtures into multiple.
- When you adjust the length of the power supply cable, please be careful not to damage the core wire.
- When the cable is bundled, heat dissipation becomes poor and the temperature becomes extremely high. When bundling 5 cables or more, connect less number of light fixture for one cable.

Refer to the power supply manual for temperature, humidity and other operating conditions.



System configuration diagram

Luci RIMiT zen cannot be connected in series.

If the length exceeds 1m (the maximum length of the product), please seperate into mutiple circuits.

The number of lighting that can be connected to the same power supply depends on the output (W) of the power supply.

